



Homogeneous Vinyl

**sphera<sup>®</sup> starT**



20 x 2 m

creating better environments

**Forbo**

FLOORING SYSTEMS



# sphera® starT

## *A game changer for effective solutions*

Sphera StarT homogeneous floor coverings add style to demanding areas with their modern color palette and non-directional pattern. Whether it is a hospital, a school or a public area, the collection offers an effective flooring solution thanks to its high PVC content, excellent durability and unique performance.

Sphera StarT's reinforced PUR coated surface treatment resists dirt and scratches, is easy to clean and maintain, ensuring hygienic floors. The collection is %100 phthalate free and helps you to create a healthy indoor environment with low VOC emissions.

## Sphera StarT – A game changer for effective solutions



High product density and high pure virgin PVC content, ensuring excellent wear-resistance (T abrasion), low residual indentation (0.02 mm) and an easy to cut, cove and groove floor for quick installation (flexibility 7 mm mandrel).



A safe and hygienic solution with high dimensional stability (<0.25%, for less tension at seams), high seam strength (270N/50 mm) and no curling (up to 80°C). Particularly suitable for demanding areas such as hospitals, schools and public buildings.



Reinforced PUR surface is highly resistant against dirt and scratches. Outstanding resistance against the most commonly used chemicals in healthcare. Easy to maintain & clean with lower maintenance costs.



Environment-friendly, phthalate-free, very low VOC emissions, complies with strict European standards REACH compliant.




A timeless non-directional pattern, in a neutral & modern color palette.


Perfectly coordinated with other Forbo flooring products including other Sphera ranges and Marmoleum.




sphera® starT

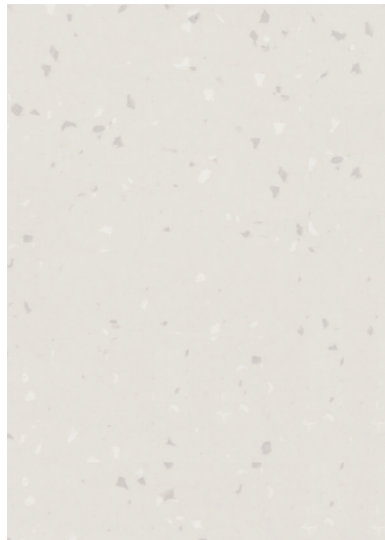


6732 | white grey

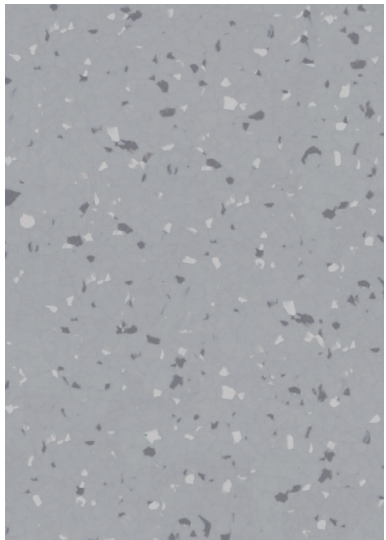


6704 | mid grey

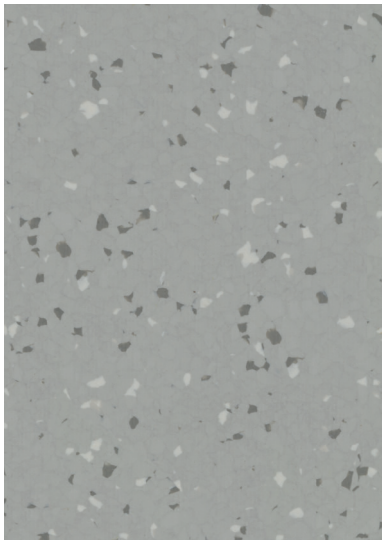


6738 | mortar

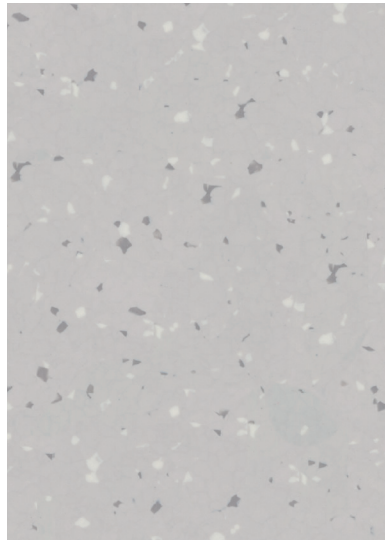


6701 | light grey

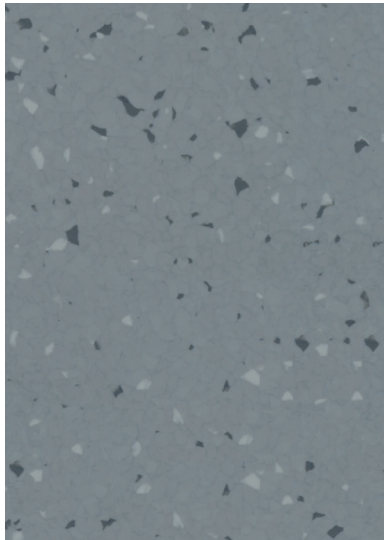


6707 | dark grey

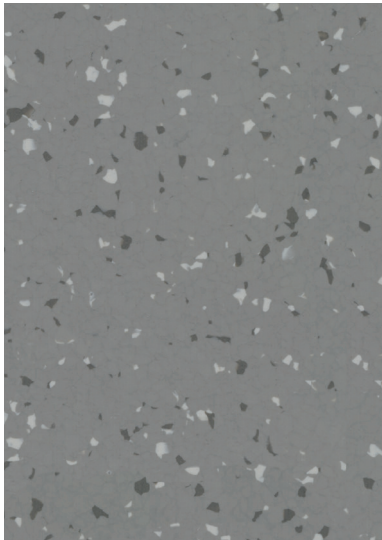

6733 | clay

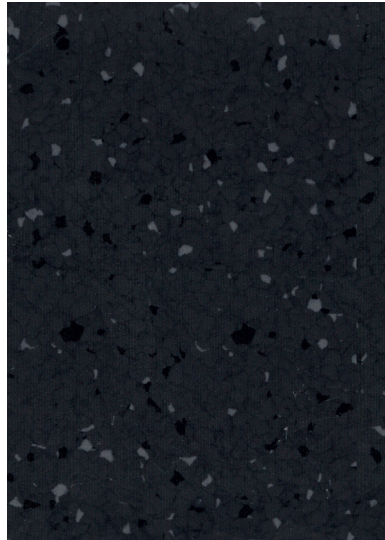


6709 | black

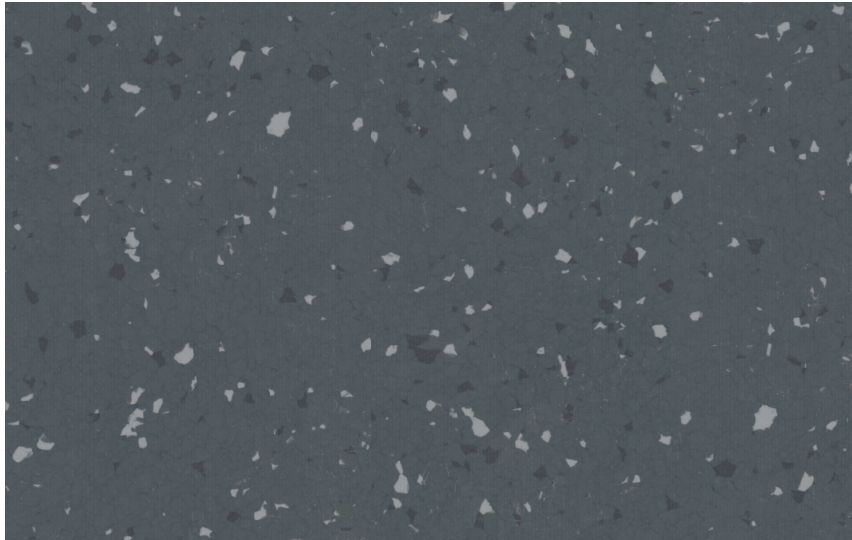


6708 | anthracite


sphera® starT

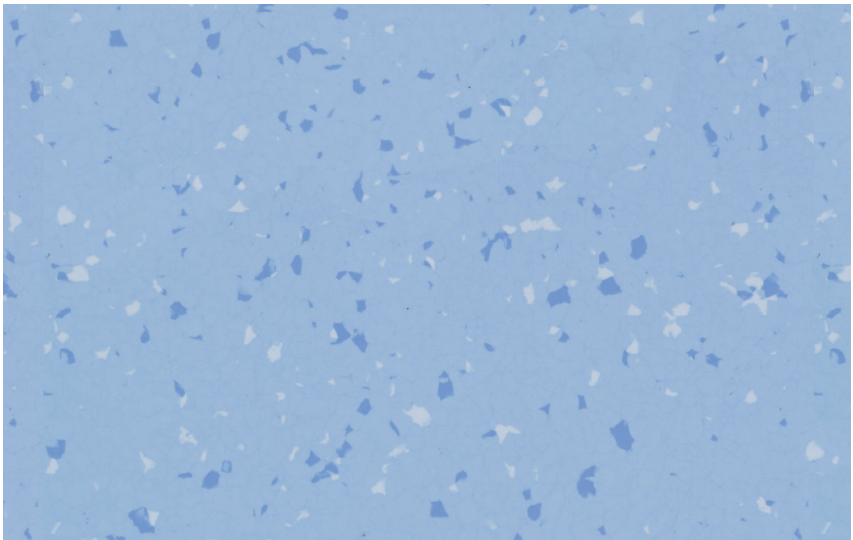


6735 | light blue

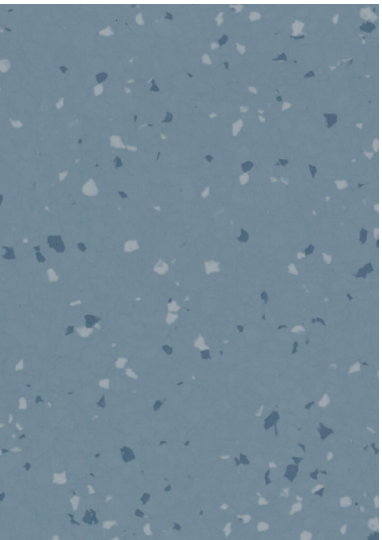


6740 | ocean

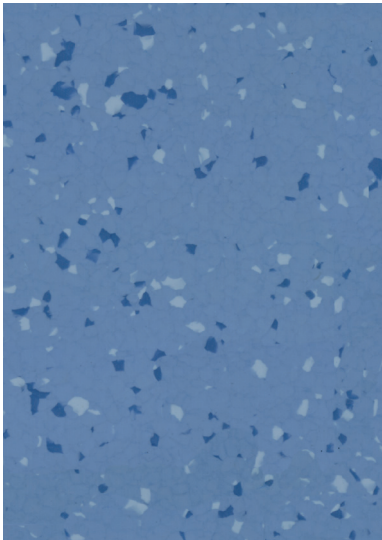


6736 | mid blue

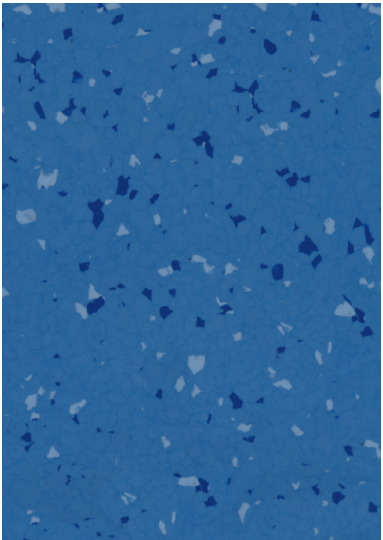


6739 | sky

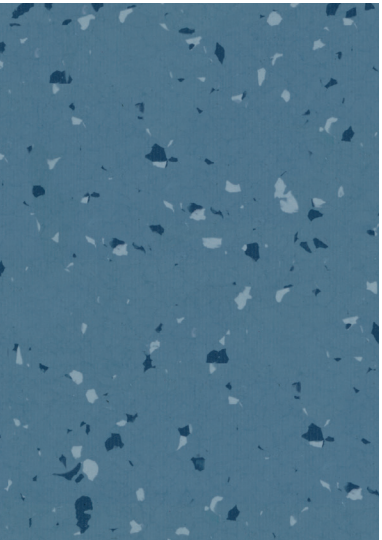

6741 | teal

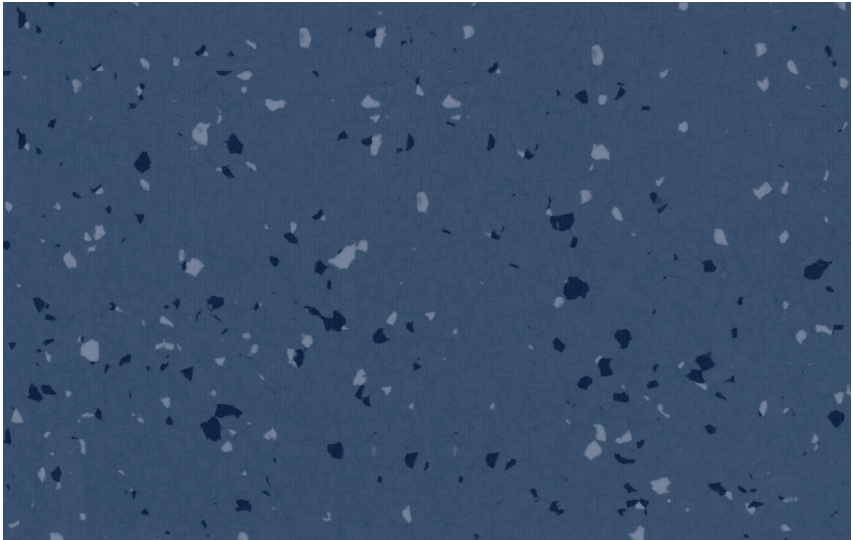

6737 | dark blue

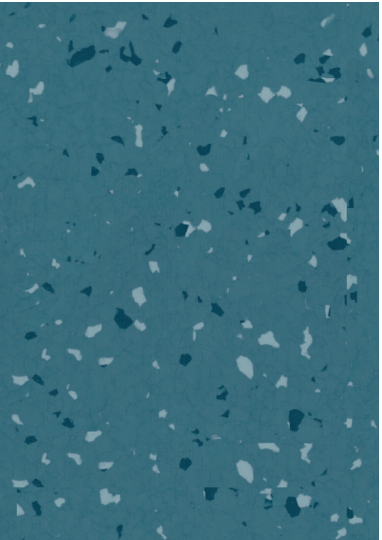


6742 | petrol




sphera® starT



6750 | lime

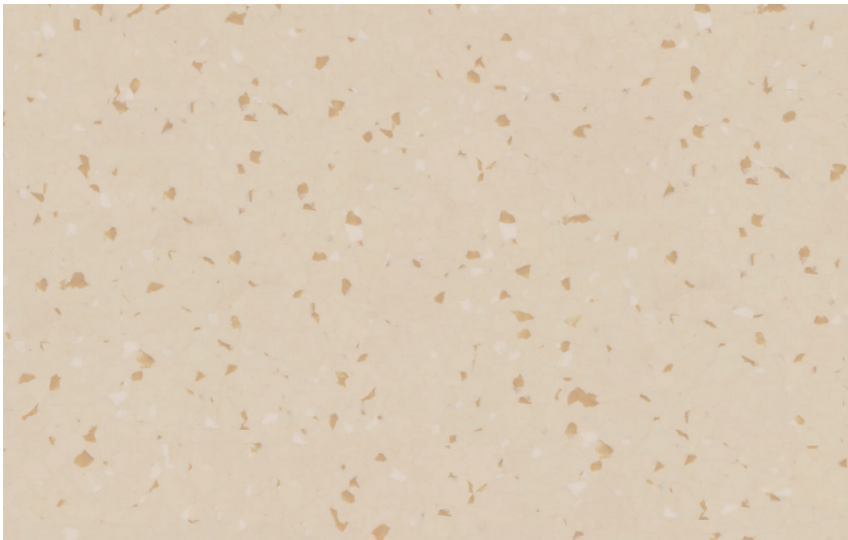


6713 | beige

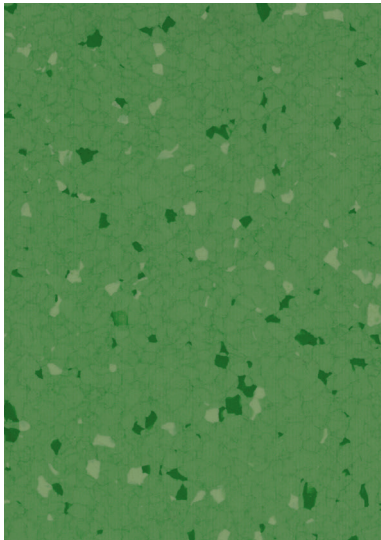


6751 | mid green




6781 | apricot

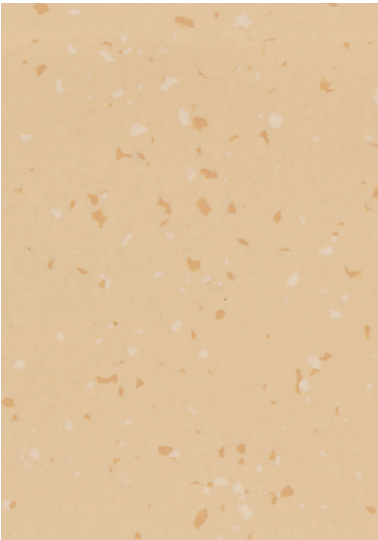


6714 | cream

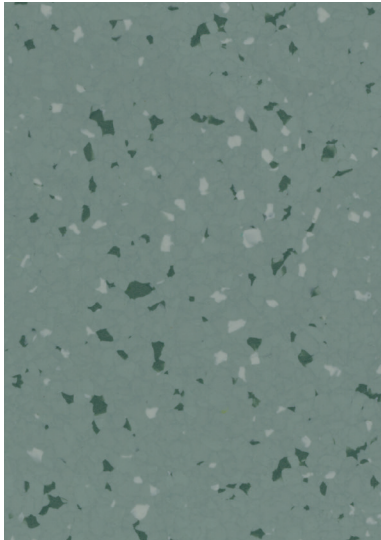

6752 | moss

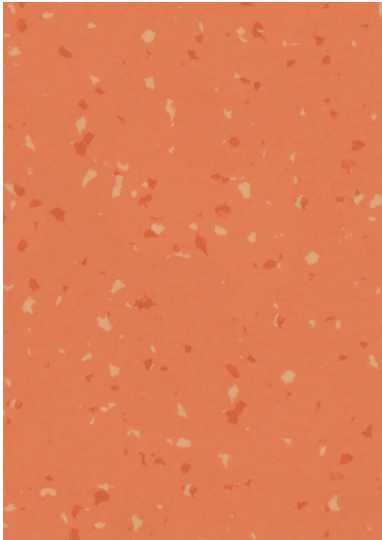


6780 | orange

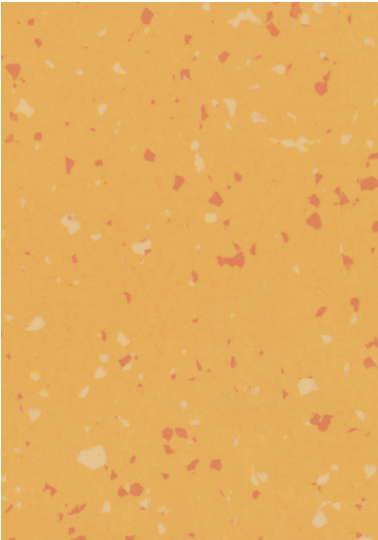


6710 | yellow


sphera® starT

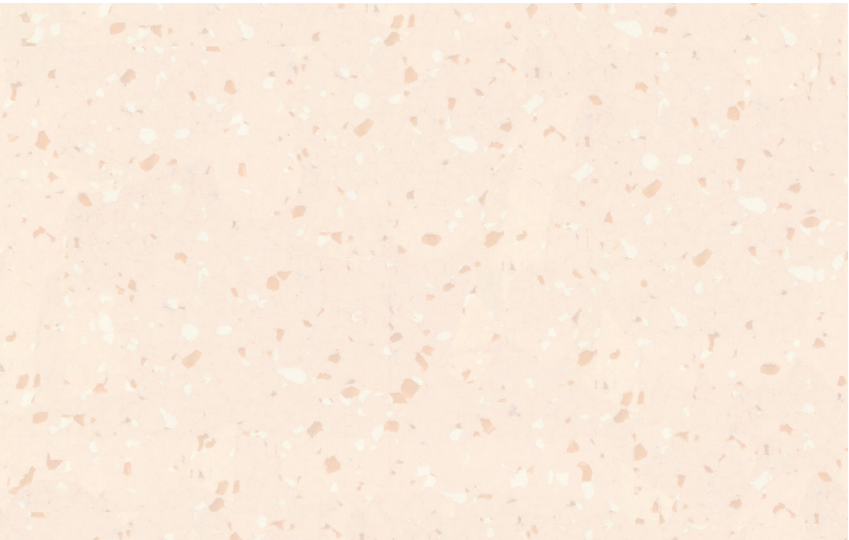


6700 | ivory

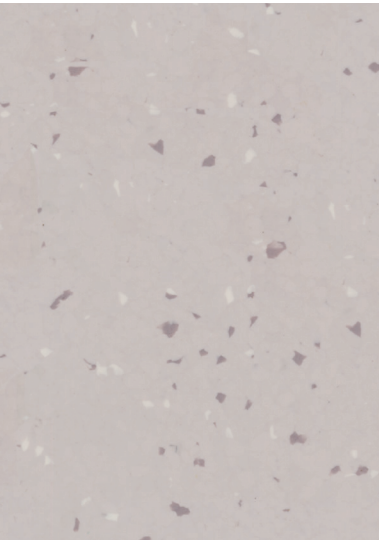


6727 | lilac

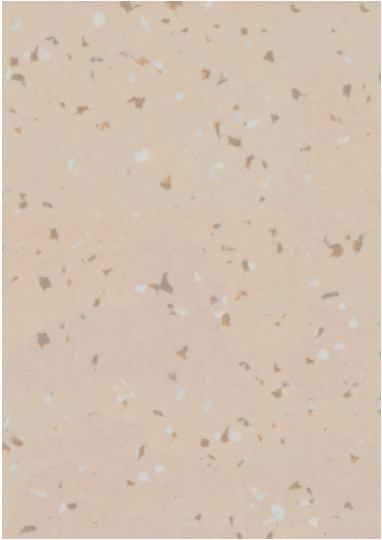


6706 | sand

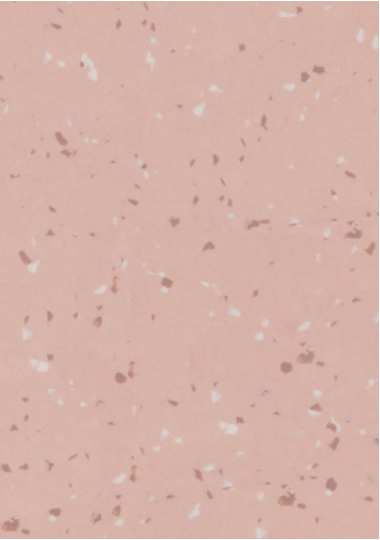


6770 | blush

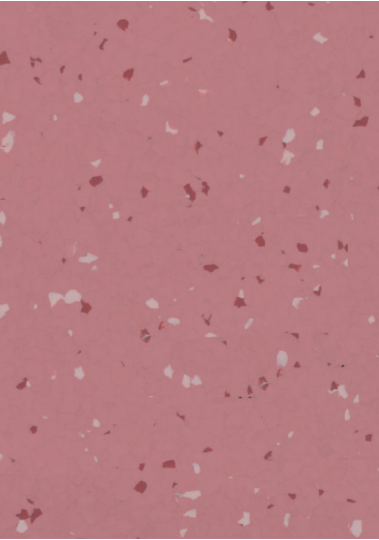

6712 | rose

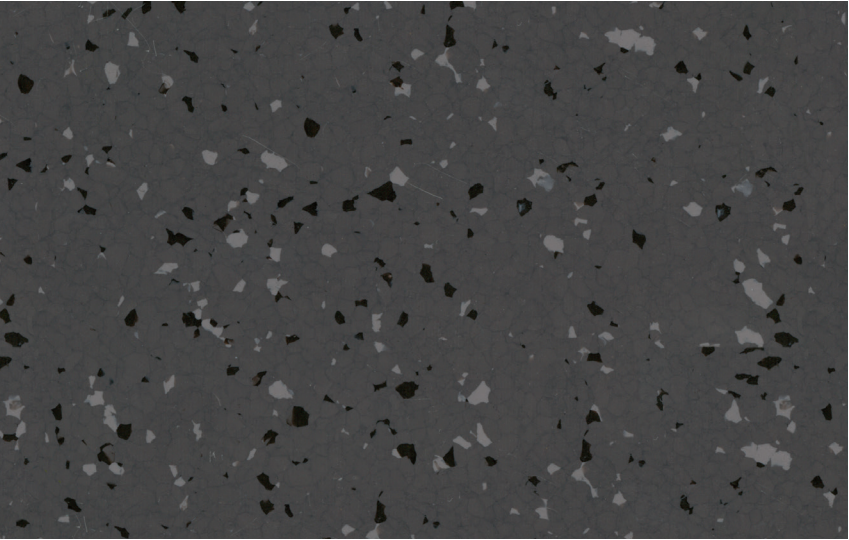

6734 | mud

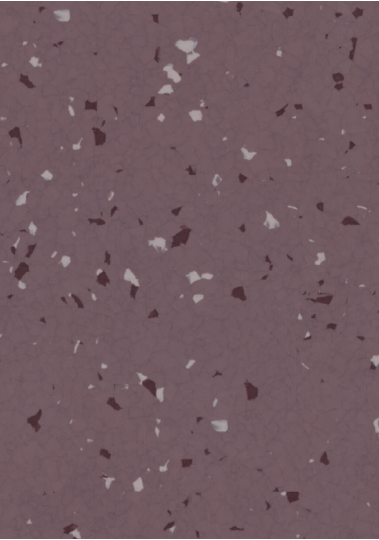

6711 | eggplant





## Technical specifications

Sphera starT meets the requirements of ISO 10581

|  | Surface finish                       | Reinforced PUR coating             |
|--|--------------------------------------|------------------------------------|
|  | Binder content                       | EN ISO 10581 Type 1                |
|  | Collection size                      | 30                                 |
|  | Commercial use                       | EN ISO 10874 Class 34              |
|  | Light industrial use                 | EN ISO 10874 Class 43              |
|  | Roll width                           | EN ISO 24341 2.0 m                 |
|  | Roll length                          | EN ISO 24341 ± 20 m                |
|  | Total thickness                      | EN ISO 24346 2.0 mm                |
|  | Total weight                         | EN ISO 23997 2800 g/m²             |
|  | Dimensional stability                | EN ISO 23999 ≤ 0.4%                |
|  | Residual indentation (typical value) | EN ISO 24343-1 ~ 0.02 mm           |
|  | Abrasion resistance                  | EN 660-2 Group T                   |
|  | Castor chair continuous use          | ISO 4918 Pass                      |
|  | Colour fastness to light             | EN ISO 105-B02 ≥ 6                 |
|  | Flexibility                          | EN ISO 24344 Ø 7 mm                |
|  | Chemical resistance                  | EN ISO 26987 Very good             |
|  | Slip resistance (ramp test)          | DIN 51130 R9                       |
|  | Bacteria resistance                  | EN ISO 846 Does not support growth |
|  | TVOC after 28 days                   | EN ISO 16000-6 A+                  |

Sphera starT meets the requirements of EN 14041

EN 14041



0200307-DoP-011

|  |                      |                                |
|--|----------------------|--------------------------------|
|  | Fire resistance      | EN 13501-1 B <sub>s1</sub> -s1 |
|  | Slip resistance      | EN 13893 ≥ 0.30                |
|  | Body voltage         | EN 1815 ≤ 2 kV                 |
|  | Thermal conductivity | EN 12524 0.25 W/m·K            |



- All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.  
- All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.

### Forbo Flooring Türkiye

İT Tower Plaza Bomonti Ar Sokak  
No: 3 D: 172. Bomonti 34381.  
TR-Şişli - İstanbul  
Tel.: +90 212 809 03 16 - 03 17  
Fax.: +90 212 809 03 18  
info.flooring.tr@forbo.com  
www.forbo.com/flooring/tr-tr/

### Forbo Flooring Middle East

P.O. BOX 487177  
Dubai - UAE  
Tel.: +971 562 896369  
flooring.middle-east@forbo.com  
www.forbo.com/flooring/en-aa

### Forbo Flooring Systems Africa

63, rue Gosset  
B.P. 62717  
FR-51055 Reims Cedex  
Reims  
Tel.: +33 326 773 030  
info.flooring.sc@forbo.com  
www.forbo.com/flooring/en-aa

### Forbo Flooring India Private Limited

Premises No 28, Ground Floor,  
Rectangle-1, D-4  
District Centre, Saket  
New Delhi, India 110017  
Tel.: +91 11 41099762  
info.flooring.in@forbo.com  
www.forbo.com/flooring/en-in

### All countries

Forbo Flooring B.V.  
P.O. Box 13  
1560 AA Krommenie  
The Netherlands  
Tel.: +31 75 647 74 77  
Fax.: +31 75 647 77 01  
question@forbo.com  
www.forbo-flooring.com

Find us on



creating better environments

FLOORING SYSTEMS