

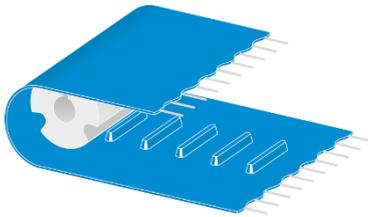
Product quick info

**CD40+ 1R U30 GL-NA-HACCP
BL FDA**

Sketch of cross-section (not actual size)

Applications

- Meat processing
- Poultry conveying
- Seafood processing
- Processing of dairy products
- Inclined transport and positioning food

**Properties/Advantages**

- Cord reinforced homogenous belt with increased belt strength for higher load and long-distance transportation (cord spacing = 12.5mm (0.49 in))
- Easy to clean
- Form-fit power transmission via sprockets with self-tracking properties
- Smooth running
- Optimal grip and good release for wet/moist products
- non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW

Basic technical data

Top face	Polyurethane, smooth
Underside	Polyurethane, Center Drive
Article no.	640029
d _{min} [mm]	76
Total thickness [mm]	3.0/10.5
C3 value [N/mm]	6.0
Weight [kg/m ²]	3.5
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 02.2026
FMS · Reproduction of text or parts thereof only
with our approval. Modifications reserved.

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 67 04 0
www.forbo-siegling.com, siegling@forbo.com