

TECHNICAL SOLUTIONS ACCESSORIES

SARLIBAIN

Adhesives

► MANDATORY



	Adhesives	Weight	Cons. m ²	Spatula	Waiting time	Opening time	Observations
Onyx + Skirting boards Surestep	522Eurosafetack / 622 Eurostar tack	13 kg	250 g	A4 + rouleau à poils mi-long	20 min	90 min	522 for all ranges of PVC floor and wall coverings, heat-reactivable PSA 622 is the EMICODE EC1 ^{PLUS} version of 522
	650 Eurostar fastcol	7,5 kg	500 g	Tools included	1-2 h	4 h	Technical contact adhesive EMICODE EC1 ^{PLUS} High performance Heat reactivable
	840 Eurotape doubletack	Dimensions: 50 mm x 50 m 90 mm x 50 m 240 mm x 25 m	0,5 m		0 min		Double-sided adhesive tape with elastic, non-deformable woven reinforcement. Very strong initial and final adhesion.

Profiles


► IMPORTANT

Cove former

- 3009 = 15 x 15 : this profile is used vertically in internal corner to that the wall covering matches corners perfectly.
- 3109 = 20 x 20 : this profile is used at the bottom of partitions. Provides backing for the flooring to rise with a rounded profile, thus making corners last longer and improving aesthetics, while preventing perforation..
- 3209 = 25 x 25 : same use as the 20 x 20 profile, but suitable for more rigid floorcoverings..

Box of 20 lengths of 2,5 m namely 50 m/box.

Ref. : 3009 blanc / 3109 noir / 3209 noir

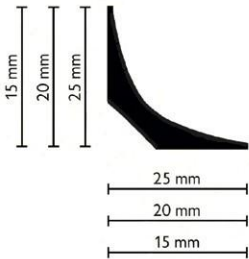


Diminishing profile

PVC profile.
Suitable for shower systems, it is placed above the skirting. It compensates for the difference in thickness between floor and wall coverings.

**Box of 40 lengths of 2,5 m
namely 100 m/box**



Ref. : 3801 blanc

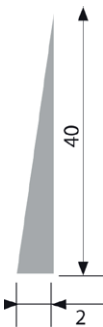

Ceramic tile/ PVC skirting junction

It is installed before the first row of wall tiles and before the skirting. It joins the tiles to the flexible floor in wet rooms.

**Box of 50 lengths of 2,5 m
namely 125 m/box.**

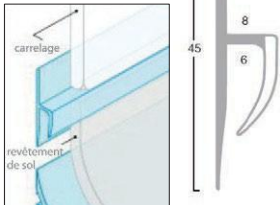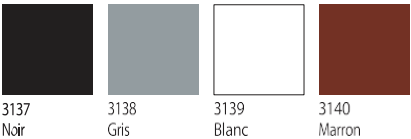

TECHNICAL SOLUTIONS ACCESSORIES

SARLIBAIN

Welding

► MANDATORY

PVC welding rod

Welding allows the junction between strip edges. Achieves E2/E3 rating with PVC. A groove is formed, and the weld is then applied using a hot air gun fitted with a PVC fast welding nozzle.

Coil of 50 m (Onyx +, Surestep)



Coldwelding : type C

A type C coldwelding is recommended for wall covering (bottom of the Onyx+ in the wetroom system) thus making the covering waterproof.

Consumption:
1 tube for 15 m joints.

Box of 30 tubes of 44 g
Ref. : 869501



Threshold

► RECOMMENDED


PVC waterproofing threshold

Used in wetroom and with a shower system, as a door rabbet. It makes the junction and waterproofing and prevents water from passing from the wetroom to the bedroom. The adhesive is applied directly to the prepared substrate before the floorcovering is laid.

Box of 10 lengths of 2 m namely 20 m/box



Seuils d'étanchéité colorés 70 mm
Réf.: 3114x



Seuils d'étanchéité colorés à soufflet 70 mm
Réf.: 3194x



Seuils d'étanchéité colorés 40 mm
Réf.: 3108x

31084 Blanc	31085 Beige	31086 Café
31144 Blanc	31145 Beige	31146 Café
31944 Blanc	31945 Beige	31946 Café
31087 Plomb	31088 Bleu	31089 Noir
31147 Plomb	31148 Bleu	31149 Noir
31947 Plomb	31948 Bleu	31949 Noir

Siphons

► IMPORTANT

Extra low trap with Ø50 mm horizontal outlet

Standard slab thickness.
Installation by a plumber.

Per unit
Ref.: 6321
freja



Extra low trap with Ø50 mm vertical outlet

Épaisseur courante de dalle.
Mise en œuvre par un plombier.

Per unit
Ref.: 6347
duschbrunn



Special renovation trap Ø50 mm vertical outlet

Thick slab. Installation by a plumber.

Per unit
Ref.: 6330
brage



Stainless steel siphon Ø40 mm

Vertical outlet. Suitable for wetrooms. Highly resistant equipment, guaranteed for a long service life and designed for heavy-duty use. Recommended for hospitals and retirement homes. Also available in a tamper-proof version. Installation by a plumber.

Per unit
Ref.: 6348 /
6348V (with tamper-proof grill)



Stainless steel grating

Stainless steel grating with a diameter of 150 mm that can be used in combination with siphons 6321, 6330, and 6347. Add a modern touch and replace the white PVC grating supplied with siphons 6321, 6330, and 6347.

Per unit



Ref.: 8389



Ref.: 8332



Ref.: 8340