

## Product quick info

**FLT U30 GL/GL-NA-HACCP BL  
FDA**

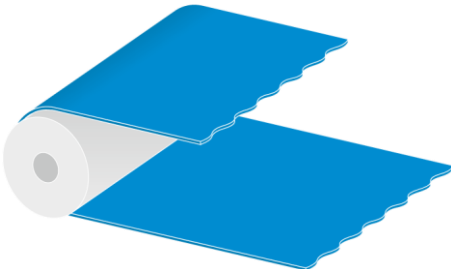

Sketch of cross-section (not actual size)

**Applications**

- Meat processing
- Poultry conveying
- Seafood processing
- Processing of dairy products
- Inclined transport and positioning food

**Properties/Advantages**

- Top face: optimal grip and good release for wet/moist products
- Driving face: optimal friction to the drive drum and low dirt adhesion
- Exceptionally easy to clean
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU, FDA 21 CFR and MHLW (No. 370). EHEDG certified (type EL Class I AUX).
- Laterally flexible and troughable

**Basic technical data**

Top face	Polyurethane, GL
Underside	Polyurethane, GL
Article no.	640012
d <sub>min</sub> [mm]	40
Total thickness [mm]	3.0
k <sub>1%</sub> relaxed [N/mm width]	1.75
Weight [kg/m <sup>2</sup> ]	3.65

Permitted operating temperature [°C] -10 to +70

Product Quick Info | EN | 11.2024  
FMS - Reproduction of text or parts thereof only  
with our approval. Modifications reserved.

Forbo Siegling GmbH  
Lilienthalstrasse 6/8, D-30179 Hannover  
Phone +49 511 67 04 0  
www.forbo-siegling.com, siegling@forbo.com