nuway® grid

TECHNICAL SPECIFICATIONS

	12mm Grid		17mm Grid	
Maximum length per module	3000mm		3000mm	
Maximum width per module	750mm		750mm	
Maximum weight per module	23kg		23kg	
	Rubber	Textile	Rubber	Textile
Depth to height of aluminium	12mm	12mm	17mm	17mm
Depth to height of infill	14mm	18mm	19mm	23mm
Infill material	Ultragrip Safety Rubber	Burford/Coral Classic/ Coral Brush	Ultragrip Safety Rubber	Burford/Coral Classic/ Coral Brush
Construction	Closed		Closed	
Total weight (kg/m²)	10.5	Approx 9	17.2	Approx 15
Max static load (kg/cm²)	100		100	
Dynamic load (kg) 2 wheels 80mm, 20,000 passes	200		200	
Fire behaviour EN ISO 9239-1	Ultragrip B _n s1		Textile B _{fl} s1	
Ramp frame model	ARF 50		ARF 70	
Manufacturing method	Entrance flooring system with carriers and rubber infills	Entrance flooring system with carriers and textile infills	Entrance flooring system with carriers and rubber infills	Entrance flooring system with carriers and textile infills
Wiper material	Rubber	Needlefelt/PVC backed textile	Rubber	Needlefelt/PVC backed textile
Pile material	N/A	100% polypropylene (Burford) /100% polyamide (Coral)	N/A	100% polypropylene (Burford) /100% polyamide (Coral)

To find out more about how our Nuway ranges help to create better environments, please visit our website and download the environmental data sheets www.forbo-flooring.co.uk/cbedownloads




Nuway Grid 12mm

62.5 mm

Nuway Grid 12mm with Ultragrip insert




Nuway Grid 17mm



Nuway Grid 12mm with textile insert



Nuway Grid 17mm with textile insert

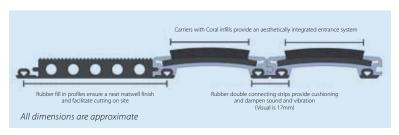



CONSIDERATIONS

scraper bar and a dark wiper strip can should be avoided.