



**siegling prolink**  
modular belts

# ENGINEERING MANUAL

Traditional conveyor belts are often intended for generic use, but the design features of Siegling Prolink modular belts are aimed at providing specific processing and application benefits. This is why the Siegling Prolink modular belts are a perfect addition to Forbo Movement Systems existing wide range of belting products.

Our vast experience in conveying and processing applications, combined with our line of highly specialized belts ensure that we can offer optimized conveying solutions regardless of the application. The Forbo Movement Systems name is synonymous with not only superior product quality, but also with professional technical support and quality service.





# SIEGLING PROLINK

## Wide range of modules available

By working closely with end users and equipment manufacturers, our R&D department ensures that all module types in the Siegling Prolink product line can be relied upon for exceptional performance.

Our belt series include approx. 100 different types of modules that can handle most conveying and processing tasks, ranging from light to heavy duty.

Individual modules are easily assembled as endless belts by connecting them with hinge pins. This means that modular belts:

- can be made to any length and width
- are easy to repair
- require less expenditure on spare parts

Existing conveyors equipped with other types of belting can easily be converted to accommodate Siegling Prolink modular belting. In addition to a wide range of standard colors, many other colors can be supplied on request. Please inquire if you have a specific color request.

Data sheets with additional technical information about individual belt series and materials are available online. Please be aware that some of the module types shown may not be available in all surface pattern, material, and color combinations as standard products. Please inquire if you need additional information or have specific requirements.




## Functionality

Custom belts are available using profiles, side guards and other accessories such as modules with different surface patterns, openings or friction pads for most Siegling Prolink belt series.

Special modules and accessories for customized uses are also available or can be developed according to customer specifications. Please contact us if you have a specific request requiring a customized conveying solution.



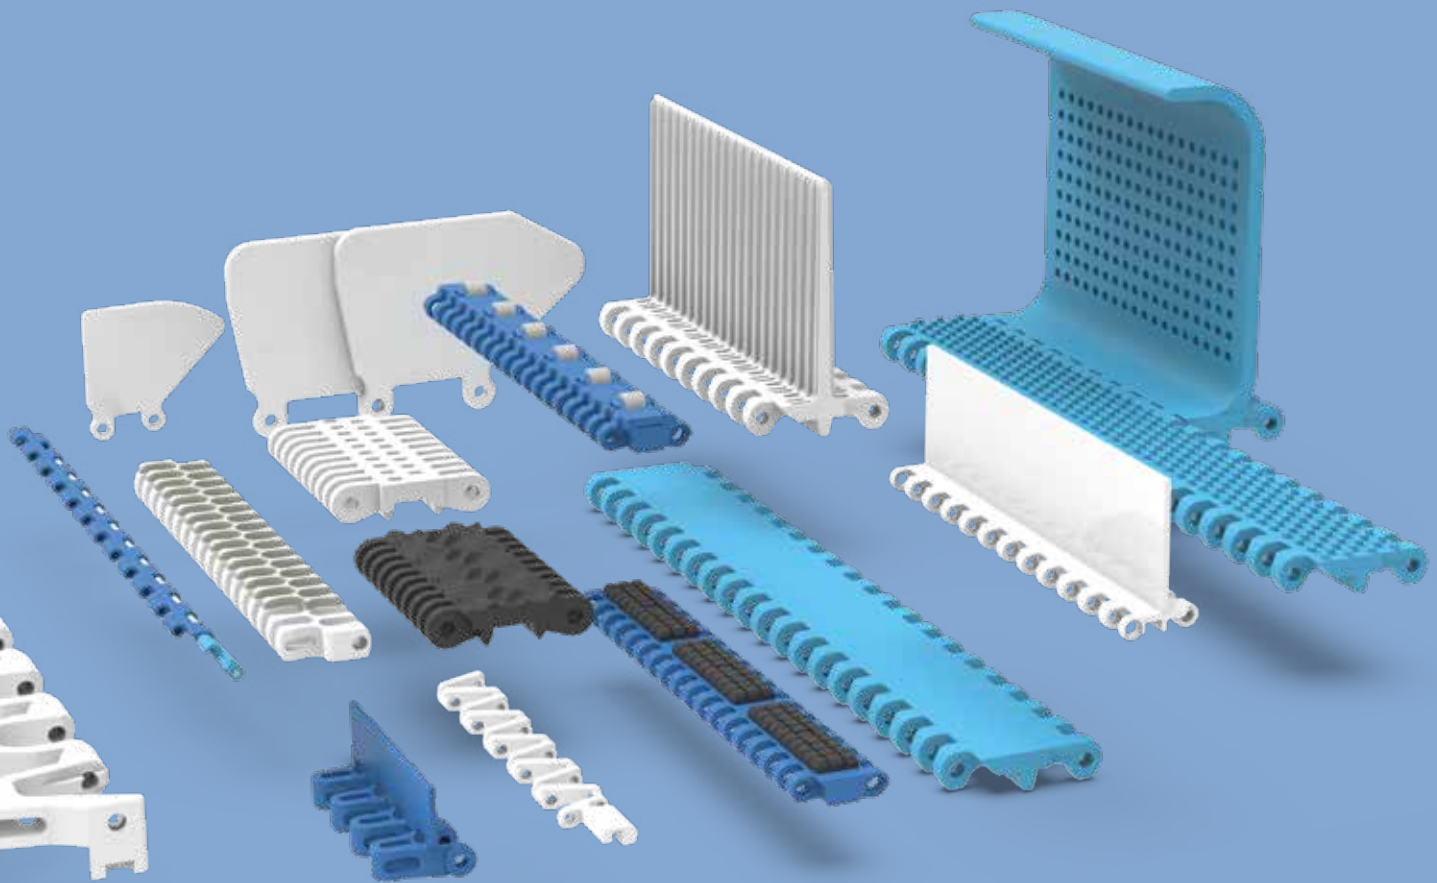

## Materials

Apart from the individual module and sprocket designs, selecting the optimal material is a way to customize a belt to suit a specific conveying or processing task.

All materials are tried and tested in the most varied of industrial environments. The specific properties of the individual materials guarantee they can handle a wide range of applications.

The Siegling Prolink modular belt series are available in several standard materials (see each series for more information) and most of them can be made from any of the materials shown in chapter 2.

## HACCP requirements

New regulatory requirements are forcing food manufacturers to adopt increasingly stringent hygiene standards and sanitation procedures. Conventional conveyor and processing belts often cannot comply with these requirements, but Siegling Prolink modular belts are designed to effectively support your HACCP concept.

# TABLE OF CONTENTS

<b>1 Product portfolio.....</b>	<b>I-8</b>	<b>2 Materials.....</b>	<b>II-1</b>
1.1 Modular belt series – Overview .....	I-10	2.1 Plastic materials (Properties).....	II-3
Type key.....	I-16	Belt material orientation chart.....	II-5
Legend.....	I-17	Use of materials .....	II-5
Straight running belts.....	I-18	Temperature ranges .....	II-7
Side flexing belts .....	I-23	Color codes .....	II-9
1.2 Detailed series information.....	I-25	Friction factors .....	II-10
Series 1.....	I-26	Declaration of compliance .....	II-11
Series 2.....	I-38	Siegling Prolink material identification test.....	II-12
Series 4.1 .....	I-50	Fire warning for Siegling Prolink	
Series 5.....	I-60	plastic modular belts .....	II-12
Series 6.1 .....	I-84	Cleaning agent compatibility .....	II-13
Series 7.....	I-104	Chemical resistance.....	II-13
Series 8.....	I-116	2.2 Other Materials .....	II-18
Series 9.....	I-134	High-grip materials .....	II-18
Series 9.1 .....	I-146	Shore hardness scale for High-grip materials....	II-18
Series 10.....	I-154	Metals.....	II-18
Series 11.....	I-168		
Series 13.....	I-178	<b>3 Engineering guidelines .....</b>	<b>III-1</b>
Series 14.....	I-186	3.1 Basics .....	III-3
Series 15.....	I-196	Factors affecting belt life.....	III-3
Series 17.....	I-202	General conveyor considerations.....	III-3
Series 18.....	I-208	Basic terms and dimension definitions.....	III-4
1.3 Retainer rings.....	I-220	3.2 Conveyor design.....	III-5
1.4 Applications.....	I-222	Shaft .....	III-5
Fruit and vegetable processing.....	I-222	Drive configurations .....	III-6
Meat and poultry processing.....	I-224	Sprockets.....	III-9
Baked goods manufacturing.....	I-226	Carryway with wearstrip .....	III-12
Seafood processing.....	I-228	3.3 Conveyor layouts .....	III-17
Automotive/tire manufacturing.....	I-230	Incline/Decline .....	III-18
Logistics.....	I-231	Decline conveying.....	III-18
Other applications.....	I-232	Hold Down Tabs.....	III-19
		Belt travel direction.....	III-21
		Side-flexing belts .....	III-22
		Module layout with specified inner radii	
		(series 9.1) .....	III-32
		Spiral conveyors .....	III-33

## 4 Calculations..... IV-1

- 4.1 Four step method ..... IV-3
  - Calculate effective belt pull  $F_U$  ..... IV-4
  - Calculate adjusted belt pull  $F_{adj}$  ..... IV-5
  - Calculate admissible belt pull  $F_{adm}$  ..... IV-6
  - Validation of belt selection..... IV-6
- 4.2 Calculation example ..... IV-7
- 4.3 Shaft calculations..... IV-10
- 4.4 Temperature influence on belt dimensions ..... IV-14

## 5 Operating instructions..... V-1

- 5.1 Preparing for the installation ..... V-3
- 5.2 Sprocket installation ..... V-4
- 5.3 Wearstrip arrangement curve belts..... V-11
- 5.4 Joining belt sections..... V-25
  - Series 1, 2, 4.1, 8, 8.1 ..... V-25
  - Series 5..... V-25
  - Series 5 ST ..... V-26
  - Combo belts (S5 ST and S11) ..... V-26
  - Series 6.1, 10 ..... V-26
  - Series 7..... V-27
  - Series 9..... V-27
  - Series 9.1 ..... V-28
  - Series 11..... V-28
  - Series 13..... V-29
  - Series 14, 15 ..... V-29
  - Series 17..... V-30
  - Series 18..... V-30
  - Series 4.1 ProSnap (PSP) ..... V-31
  - Series 6.1, 10 ProSnap (PSP) ..... V-31
  - Series 13 ProSnap (PSP)..... V-31
  - Small plugs for extruded or steel pins  
(Series 4.1 and 8) ..... V-32
  - Small plugs for extruded or steel pins  
(Series 6.1 and 10)..... V-32
  - Belts with more than one pin ..... V-33
  - Alternativ option for belts with more than  
one pin per hinge Series 4.1, 6.1, 8, 10, 13..... V-33

- 5.5 Installing a modular belt ..... V-34
  - Installation ..... V-34
- 5.6 Maintenance and repair..... V-35
- 5.7 Cleaning..... V-36
- 5.8 Preventive maintenance and troubleshooting... V-37
  - The belt is not tracking properly ..... V-37
  - Sprockets do not engage correctly ..... V-37
  - Excessive sprocket wear..... V-38
  - Excessive belt wear ..... V-38
  - Belt stretching; excessive catenary sag..... V-39
  - Hinge pins are migrating out of the belt..... V-39

## 6 Appendix ..... VI-1

- 6.1 Glossary ..... VI-3
- 6.2 Glossary of symbols..... VI-6
- 6.3 Additional tables ..... VI-9
  - Speed limit curve belts ..... VI-9
  - Shaft dimensions for molded sprockets ..... VI-11
  - Bore size dimensions at Prolink sprockets..... VI-12
  - Groove dimensions for circlips ..... VI-13
  - Minimum design radii..... VI-15
  - Load index ..... VI-17
  - General material data ..... VI-17
  - Dimension deviation..... VI-18
  - Dimension tolerance..... VI-19
  - Drainage capacity/flow rate of Prolink belts .... VI-19
- 6.4 Conversion table metric/imperial ..... VI-21
- 6.5 Assembly information ..... VI-22
  - Assembly Retainer Rings..... VI-22
  - Assembly Split Sprockets..... VI-22
- 6.6 Questionnaire ..... VI-23
  - Bent profiles – Specification sheet..... VI-24
  - Application check list ..... VI-25
  - Spiral data form..... VI-27
- 6.7 Notes..... VI-31
- 6.8 Legal notes..... VI-32



# 1 PRODUCT PORTFOLIO

- 1.1 Modular belt series – Overview
- 1.2 Detailed series information
- 1.3 Retainer rings
- 1.4 Applications



# 1.1 MODULAR BELT SERIES – OVERVIEW

Siegling Prolink offers following different belt series to match your conveying needs.







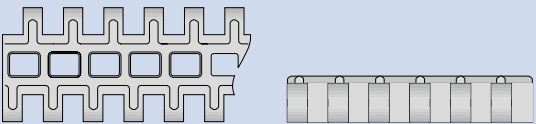

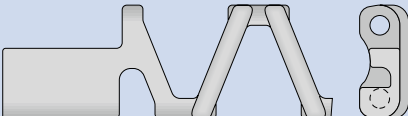
Series	Pitch	Description
1	50 mm (2 in)	Medium to heavy-duty belt for industrial conveying tasks. Closed hinge design.
2	25 mm (1 in)	Light-duty belt for food, container handling and industrial use. Open hinge design.
4.1	14 mm (0.55 in)	Light to medium-duty belt for food and non-food use. Small pitch allows tight product transfers using nose bars or sprockets. Open hinge design.
5	25 mm (1 in)	Light to medium-duty radius and spiral belt with stainless steel hinge pins. Exceptionally strong and versatile side flexing belt with large open area.
6.1	50 mm (2 in)	Medium to heavy-duty belt designed specifically for tasks requiring the highest hygiene standards in meat, poultry and seafood processing, including cutting, deboning and skinning lines. Easy to clean. Open hinge design.
7	40 mm (1.6 in)	Heavy-duty belt with superior pull strength and excellent durability for industrial applications. Designed for heavy loads, such as worker belts for the automotive industry, vehicle conveying, etc. Closed hinge design.
8.1	25.4 mm (1 in)	Medium to heavy-duty belt for industrial applications. Closed hinge design.
9	50 mm (2 in)	Medium to heavy-duty radius and spiral belt with stainless steel hinge pins. Exceptionally strong and versatile side flexing belt with large open area.
9.1	50 mm (2 in)	Medium to heavy-duty spiral belt with stainless steel hinge pins. Exceptionally strong side flexing belt with large open area, clip-free design and adjustable belt radius of 1.3 to 2.9 x belt width.
10	25.4 mm (1 in)	Light to medium-duty belt for hygiene-sensitive products. Easy to clean. Open hinge design.
11	25 mm (1 in)	Side flexing belt for conveying lightweight products. This lightweight belt has an exceptionally low turn radius of 1.4 x belt width.
13	8 mm (0.31 in)	Light-duty micro pitch belt for food and non-food tight-transfer nose bar use. Open hinge design.
14	12.7 mm (0.5 in)	Medium-duty belt for food and non-food use. Small pitch allows tight product transfers. Bottom design optimized for nose bars. Strong closed hinge design.
15	12.7 mm (0.5 in)	Light-duty belt for food applications utilizing 12.7 mm (0.5 in) nose bars
17	25.4 mm (1 in)	Medium to heavy-duty belt for industrial applications. Closed hinge design.
18	25.4 mm (1 in)	Light to medium-duty belt for food and non-food applications

Each belt series is offered in several different surfaces types such as Flat Top, Grid Top, Nub Top, Cone Top, Non skid and Friction Top combined with variations in the open area. The availability of so many different options guarantees that specific requirements can be met.

The following tables will help you choose the right series.

**Please note: Series 3 is replaced by Series 6.1 offering same options in higher quality and improved cleanability.**








## Belt surface options

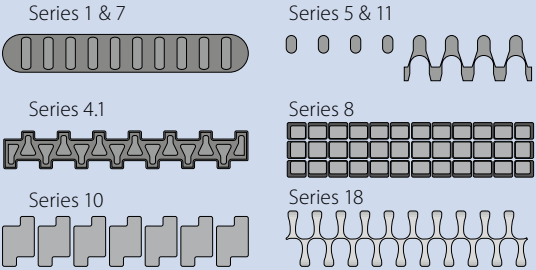Use/requirement	Key	Explanation
Standard conveying	FLT 	<b>Flat top</b> Smooth flat surface for general conveying with no specific surface requirements. Flat top surfaces can have openings.
Extra grip	CTP 	<b>Cone top</b> Small cones that grip soft products, such as meat, to ensure efficient conveying, even in light incline applications.
	FRT 	<b>Friction top</b> Rubber inlays create more friction between the belt surface and the conveyed product. The style and design of the rubber inlays vary by series.
Conveying people	NSK 	<b>Non skid</b> Specially designed non skid surface provides extra grip and prevents slipping even in wet and dirty environments.
	SRS 	<b>Slip resistant surface</b> Convenient surface for conveying people where minimal slip resistance is required.
Superior product release and minimum surface contact	NPY 	<b>Negative pyramid pattern</b> Reduced contact area for better release of soft products, e.g. sticky dough.
	RAT 	<b>Radius top</b> Raised, rounded edges reduce the contact area to ensure improved product release combined with improved product cooling and reduced friction.
	NTP 	<b>Nub top</b> Small nubs significantly reduce the contact area between the belt and the product. Superior surface for non-stick uses, e.g. leafy vegetables.
	RSA 	<b>Reduced surface area</b> Reduced surface area will lift products to the surface to ensure superior airflow

Continued on next page

# 1.1 MODULAR BELT SERIES – OVERVIEW

Continued from previous page

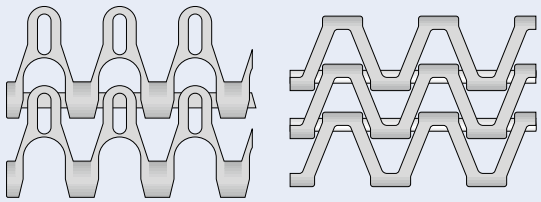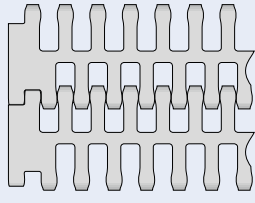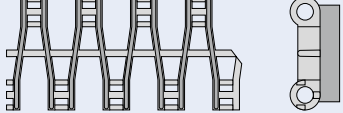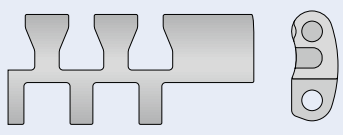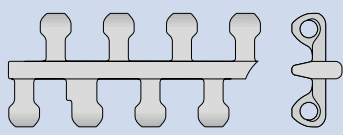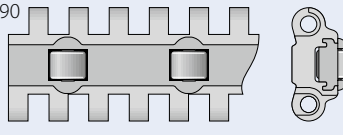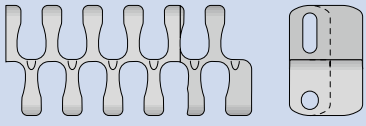Use/requirement	Key	Explanation
Dewatering and cooling	GRT 	<b>Grid top</b> Flat surface with large openings (> 45 %)
	FLT 	<b>Flat top</b> Flat surface with large openings
	RRB 	<b>Raised rib</b> Used with finger transfer plates to eliminate product tippage
	CUT 	<b>Curved top</b> Reduce movements of conveyed products. Can be used with belt scraper at the drive due to circumference that's created when flexing over sprockets.
Better transport incline	LRB 	<b>Lateral rib</b> For incline uses when conveying delicate products.
Reduced surface friction perpendicular to belt travel	RTP A90 	<b>RTP A90</b> Roller Top A90 for cross shifting materials from or onto a belt 90° from running direction
Save floor space and allow uninterrupted side transfer	HDK 	<b>High Deck</b> Allows utilization of entire belt width and beyond

### Available surfaces for each series

Surface pattern	Series																	
	1	2	4.1	5	6.1	7	8	8.1	9	9.1	10	11	13	14	15	17	18	
CTP (Cone top)					●								●					
CUT (Curved top)														●				
FLT (Flat top)	●	●	●		●	●		●			●		●	●		●		
FRT (Friction top)	●	●	●	●		●	●				●	●		●			●	
GRT (Grid top)		●		●					●	●		●			●		●	
GRT G (Grid top guided)				●					●								●	
GRT RG (Grid top reverse guided)				●														
GRT HD (Grid top Hold Down caps)												●						
GRT ST (Grid top strong)				●														
HDK (High Deck)																	●	
LRB (Lateral rib)											●							
NPY (Negative pyramid)			●										●					
NSK (Non skid)	●					●		●										
NTP (Nub top)			●	●	●				●		●							
RAT (Radius top)								●										
RRB (Raised rib)		●																
RSA (Reduced surface area)															●			
SRS (Slip-resistant surface)	●					●		●								●		
RTP (Roller top)							●											

\* on request

### Available open percentage for each series

Belt opening	Series																	
	1	2	4.1	5	6.1	7	8	8.1	9	9.1	10	11	13	14	15	17	18	
0% (Closed)	●	●	●		●	●	●	●			●		●	●		●		
1% – 10%						●												
11% – 20%	●	●																
21% – 30%			●		●			●			●			●				
31% – 40%				●	●						●	●	●					
> 40%		●		●					●	●		●			●		●	

The percentage indicates the relation of bright area to shadow, if the module is beamed with light

# 1.1 MODULAR BELT SERIES – OVERVIEW

## Accessories available for each series

Accessories	Series																	
	1	2	4.1	5	6.1	7	8	8.1	9	9.1	10	11	13	14	15	17	18	
FLT GT (Flat top with guiding tabs)								●										
Profiles	●	●	●	●	●		●		●	*	●	●		●		●		
– Scooped molded					●													
– Scooped bent	*	*	*	*	*		*		*	*	*	*		*				
Side guards	●	●		●	●		●	●	●		●						●	
Finger plates		●																
Hold Down Tabs					●		●	●			●							
Adjustable inner radius									●	*								
Ball-bearing modules				●														
PRR (Pin retained rollers)	*	*	*	*	●	●		●	*	*	*			●			*	
Wheelstopper						●												
ProSnap			●		●						●		●					

\* on request








# 1.1 MODULAR BELT SERIES – OVERVIEW

## Type key\*

	Series ①										
	Open area/Sprocket size ②										
	Surface pattern ③										
	Type ④										
	Style ⑤										
	Material ⑥										
	Color ⑦										
	Height/Diameter/Bore size and style ⑧										
	Length/Width ⑨										
	Cap material and color ⑥ ⑦										
1	S6.1	-	Z10		SPR		PA	LG	SQ40mm		(page I-93)
2	S4.1	-	0	NPY			PP	BL			(page I-53)
3	S9	-	45	GRT	SMR	SG	POM	UC	H25	W50	(page I-143)
4	S11	-	45	GRT	CCW		POM-CR	WT		(POM WT/BL)	(page I-173)

\* Not every product requires all characteristics (within the designation). If there is an irrelevant characteristic, this category will be ignored and replaced by the following one.

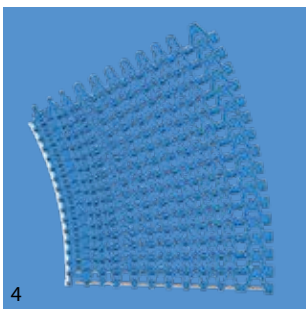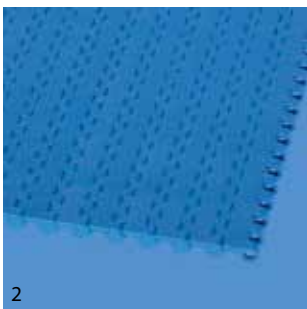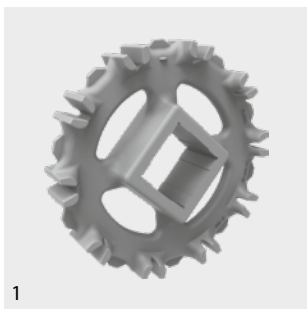

# Legend

① Series		PSU-0		Prof. scoop uni. closed		⑥ Material		⑦ Color*				
S1 ... S18		PSU-X		Prof. scoop uni. x% open		PA		Polyamide		AT	Anthracite	
② Open area/Sprocket size		RI		High Grip insert		PA-HT		Polyamide high temperature		BG	Beige	
Percentage open area		ROL		Rollers		PBT		Polybutylenterephthalate		BK	Black	
Format: xx		RTR		Retaining ring		PE		Polyethylene		BL	Blue	
E.g. 20 = 20%		SG		Module with sideguard		PE-I		PE impact resistant		DB	Dark blue	
For sprockets: number of teeth		SGL		Side guard, left		PE-MD		PE metal detectable		GN	Green	
Format: "Z"xx		SGR		Side guard, right		PLX		Wear & impact improved polymer		LB	Light blue	
E.g. Z12 = 12 teeth		SLI		Slider		POM		Polyoxymethylene (Polyacetal)		LG	Light gray	
③ Surface pattern		SMA		Side module, A side		POM-CR		POM cut resistant		OR	Orange	
BSL		SMB		Side module, B side		POM-HC		POM highly conductive		RE	Red	
CTP		SML		Side module, left		POM-MD		POM metal detectable		TQ	Turquoise	
CUT		SMR		Side module, right		POM-PE		POM side modules + PE center modules		UC	Uncolored	
FLT		SMT		Side module, tight radius		POM-PP		POM side modules + PP center modules		WT	White	
FRT-OG		SMU		Side module, universal/both sides		PP		Polypropylene		YL	Yellow	
FRT(X)		SPR		Sprocket		PP-MD		PP metal detectable		⑧ Height/Diameter/Bore size and style		
GRT		SPR-SP		Split sprocket, 2-part		PP-SW		PP steam and hot water resistant		Height in mm (in)		
HDK		SSL		Self stacker side module, left		PXX-HC		Self-extinguishing highly conductive material		Format: Hxxx		
LRB		SSR		Self stacker side module, right		R1		TPE 80 Shore A, PP		Pin diameter in mm (in)		
MOD		TPL		Turning panel, left		R2		EPDM 80 Shore A, vulcanized		Format: Dxxx		
NCL		TPR		Turning panel, right		R3		TPE 70 Shore A, POM		Bore size: SQ (= square) or RD (= round)		
NPY		UM		Universal module		R4		TPE 86 Shore A, PP		either in mm or inches		
NSK		WSC		Wheel Stopper Center		R5		TPE 52 Shore A, PP		Format: SQxxMM or RDxxIN		
NSK2		WSS		Wheel Stopper Side		R6		TPE 63 Shore A, POM		⑨ Length/Width		
NTP		⑤ Style				R7		TPE 50 Shore A, PP		Pins Length in mm (in)		
PRR		1.6		1.6 collapse factor		R8		TPE 55 Shore A, PE		Format: Lxxx		
RAT		1.7		1.7 collapse factor		SER		Self-extinguishing TPE		Module width in mm (in)		
RRB		2.2		2.2 collapse factor		SS		Stainless steel		Format: Wxxx		
RSA		2.2 G		2.2 collapse factor, guided		SSS		Stainless steel acid resistant		* For each series' standard colors please refer to the table of materials for each belt (chapter 1.2). A number of other colors are available on request. Colors can vary from the original due to the print, production processes or material used.		
RTP		A90		Angle 90° to conveying direction		TPC1		Thermoplastic Copolyester				
SRS		BT		Bearing tab		-HA		Supports the HACCP concept				
		DR		Double row sprocket		HW		High Wear resistant material				
		F1, F2, F3 ...		Collapse factor modules								
		G		Guided								
		GT		Guiding tabs								
		HD		Hold Down								
		HR		Hard removable pin								
		Ixx		xx = indent in mm								
		RG		Reversed guided								
		SG		Side guard								
		SP		Split sprocket								
		ST		Strong								
		V2		Version 2 indicatind a design update								

\* For each series' standard colors please refer to the table of materials for each belt (chapter 1.2). A number of other colors are available on request. Colors can vary from the original due to the print, production processes or material used.


# 1.1 MODULAR BELT SERIES – OVERVIEW

## Straight running belts


### Pitch 8 mm (0.31 in)



S13 | 0 % open | Flat Top

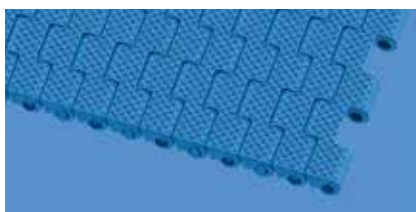

S13 | 0 % open | Negative Pyramid

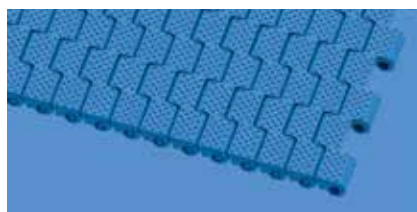


S13 | 0 % open | Cone Top



S13 | 34 % open | Flat Top


### Pitch 12.7 mm (0.5 in)

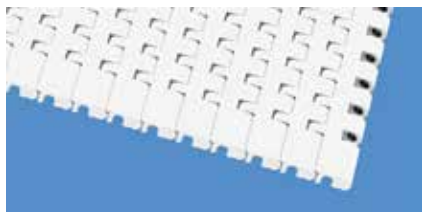


S14 | 0 % open | Flat Top



S14 | 25 % open | Flat Top

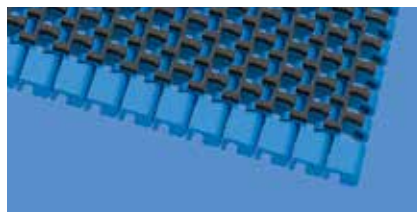


S14 | 25 % open | Friction Top 1

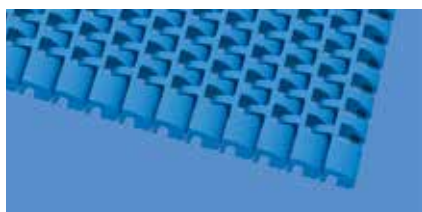

S14 | 25 % open | Curved Top



S15 | 47 % open | Grid Top

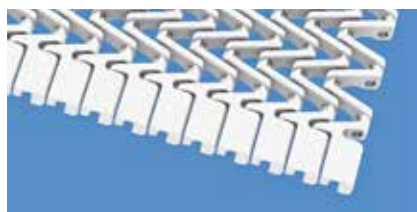


S15 | 47 % open | Reduced surface area




S14 | 0 % open | FLT with PRR

**Pitch 14 mm (0.55 in)**

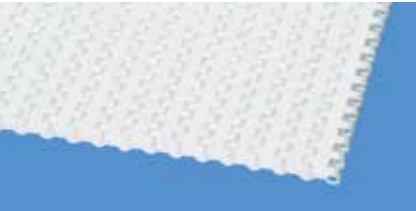


S4.1 | 0% open | Flat Top

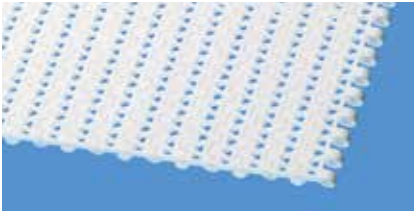


S4.1 | 21 % open | Flat Top



S4.1 | 0% open | Negative Pyramid

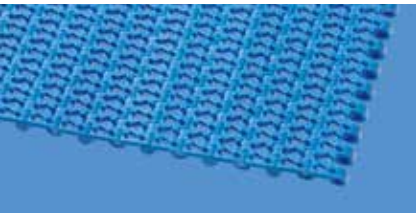

S4.1 | 21 % open | Nub Top

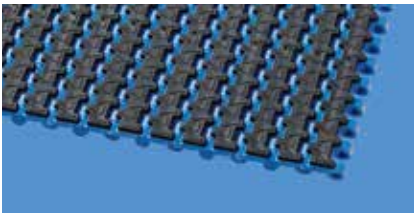


S4.1 | 0% open | Friction Top 1

**Pitch 25 mm (1 in)**




S2 | 0% open | Flat Top

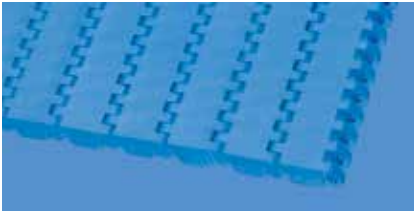


S8.1 | 0% open | Flat Top




S10 | 0% open | Flat Top

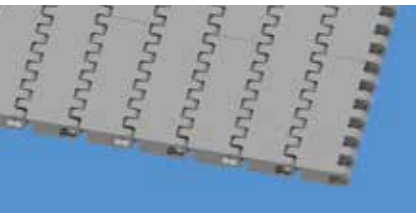


S17 | 0% open | Flat Top

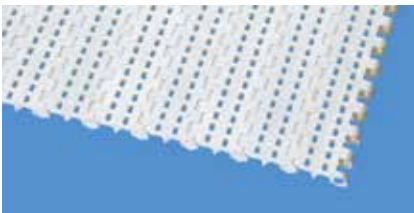

S2 | 12% open | Flat Top

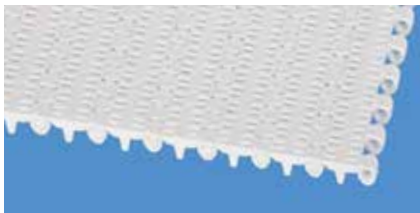


S10 | 22% open | Flat Top

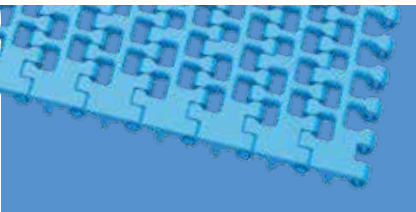

S10 | 36% open | Flat Top



S18 | 44% open | Grid Top 2.2

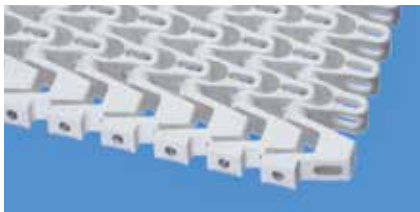

S5 | 45% open | Grid Top

Continued on next page



# 1.1 MODULAR BELT SERIES – OVERVIEW

## Straight running belts


**Pitch 25 mm (1 in)**




S2 | 57% open | Grid Top



S2 | 57% open | Raised Rib

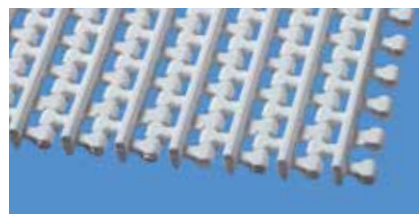


S10 | 36% open | Lateral Rib

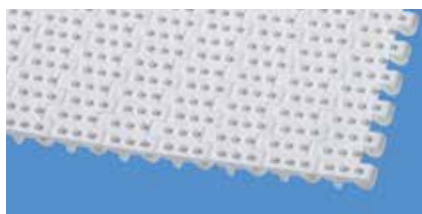


S10 | 0% open | Nub Top



S8 | 25% open | Radius Top

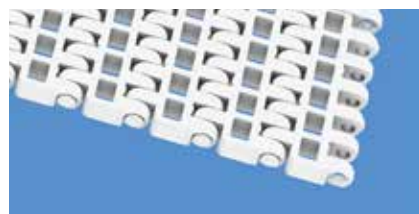


S8.1 | 30% open | Flat Top

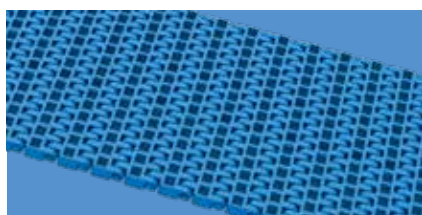

S8.1 | 30% open | Flat Top - guided



S2 | 0% open | Friction Top 1

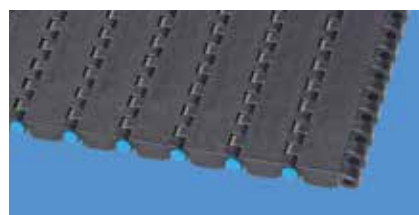


S8.1 | 0% open | Slip-resistant




S17 | 0% open | Slip-resistant




S8.1 | 0% open | Non Skid

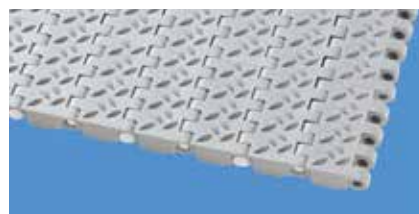


S8.1 | 0% open | Non Skid 2

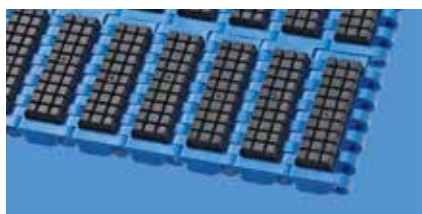


S8 | 0% open | Friction Top 1

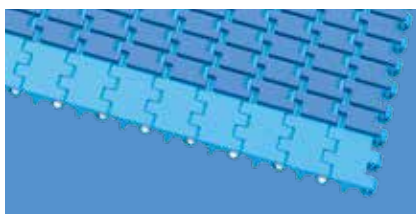

S10 | 0% open | Friction Top 1

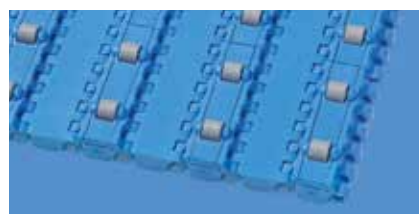


S8 | 0% open | Roller Top A90

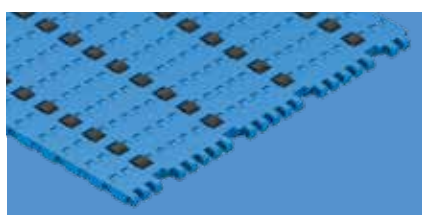


S8.1 | 0% open | FLT with PRR

**Pitch 40 mm (1.6 in)**

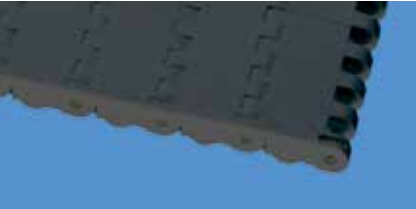

S7 | 0% open | Flat Top

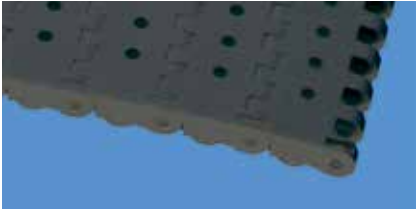

S7 | 6% open | Flat Top



S7 | 0% open | Slip-resistant




S7 | 0% open | Non Skid



S7 | 6% open | Non Skid



S7 | 0% open | Friction Top 1

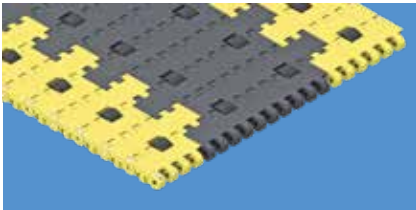

S7 | 0% open | FLT with PRR

# 1.1 MODULAR BELT SERIES – OVERVIEW

## Straight running belts

**Pitch 50 mm (2 in)**




S1 | 0% open | Flat Top




S6.1 | 0% open | Flat Top




S1 | 18% open | Flat Top

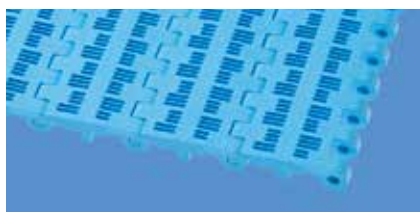

S6.1 | 21% open | Flat Top

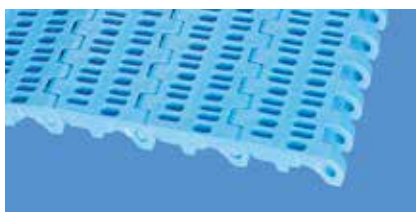

S6.1 | 23% open | Flat Top

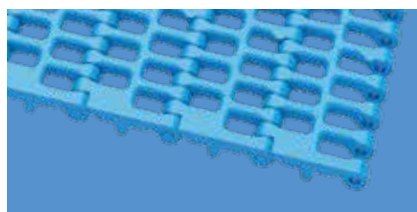

S6.1 | 36% open | Flat Top



S9 | 57% open | Grid Top




S9.1 | 57% open | Grid Top



S6.1 | 0% open | Cone Top



S6.1 | 0% open | Nub Top

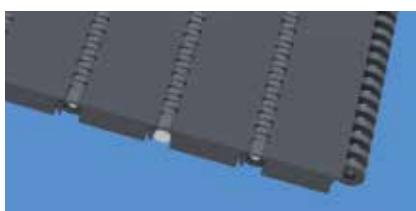


S1 | 0% open | Slip-resistant



S1 | 0% open | Non Skid



S1 | 0% open | Friction Top 1

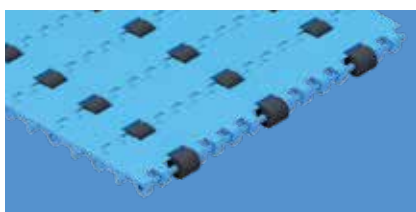


S6.1 | 0% open | FLT with PRR




## Side flexing belts


**Pitch 25 mm (1 in)**

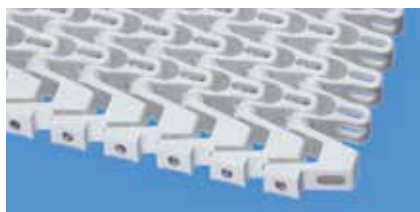


S5 | 45 % open | Grid Top

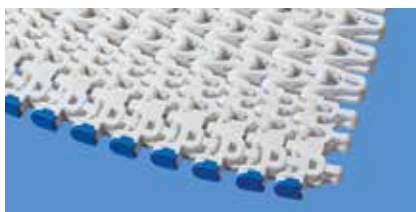

S11 | 45 % open | Grid Top

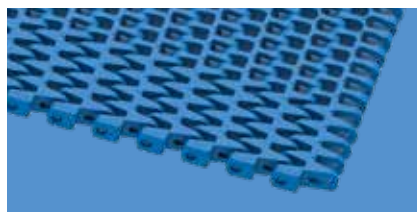


S18 | 44 % open | Grid Top 1.7

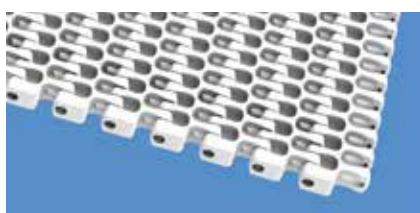

S18 | 44 % open | Grid Top 2.2



S5 | 45 % open | Grid Top Guided

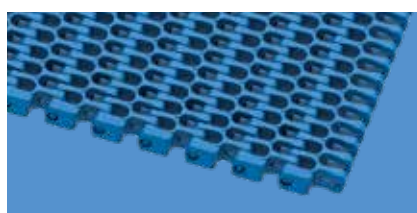


S18 | 44 % open | Grid Top 2.2 Guided



S5 | 45 % open | Grid Top Reverse Guided




S5 | 45 % open | Grid Top Strong

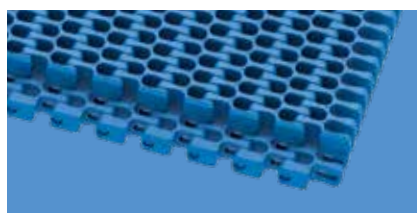

S18 | 44 % open | High Deck 2.2



S11 | 45 % open | Hold Down Caps

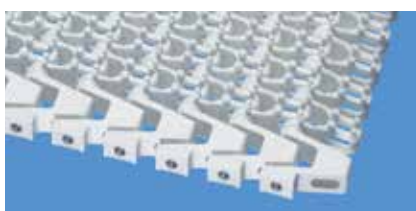

S5 | 45 % open | Nub Top




S5 | 39 % open | Friction Top 1



S5 | 33 % open | Friction Top 2



S11 | 33 % open | Friction Top 2

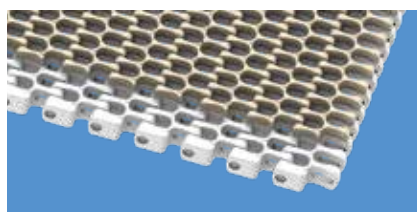

S18 | 44 % open | Friction Top 1



S5 | 45 % open | Bearing Tab Module

# 1.1 MODULAR BELT SERIES – OVERVIEW

## Side flexing belts

**Pitch 50 mm (2 in)**



S9 | 57 % open | Grid Top



S9 | 57 % open | Grid Top Guided



S9 | 57 % open | Nub Top



S9.1 | 57 % open | Grid Top



# 1.2 DETAILED SERIES INFORMATION

In this chapter each belt type is described in detail with all necessary information such as surface type, opening percentage, dimensions, stock availability and specific conveyor design parameters.

There is a dedicated section for each individual belt series. An introduction page provides the general features of the series, followed by single page presentations of all existing types of the series. At the end of the section for each series, the available accessories are shown.



SERIES 1 | BELT TYPES

siegling prolink  
modular belts


Straight running belt | Pitch 50 mm (1.97 in)

S1-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top with replaceable rubber pads for increased grip

Variant specific dimensions [mm (in)]



Belt dimensions

	p	d <sub>pin</sub>	t <sub>pin</sub>	t <sub>pin</sub>	h <sub>pin</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tot</sub>	Width tolerance [%]	Minimum flex radii <sup>1)</sup>
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width increment	Width		r1 r2 r3 r4 r5
mm	50.0	6.0	16.0	8.0	3.0	250.0	10.0	±0.2	–	50.0 100.0 150.0 50.0
inch	1.97	0.24	0.63	0.31	0.12	9.84	0.39	±0.2	–	1.97 3.94 5.91 1.97

Available standard materials<sup>2)</sup>

Belt	Pin	Rubber	Nominal belt pull, straight	Weight	Width deviation	Temperature	Certificates <sup>3)</sup>							
Material	Color	Material	Color	[N/mms]	[lb/ft <sup>2</sup> ]	[°C]	[°F]							
PCM	WT	PBT	UC	R2	BK	40	2741	15.0	3.07	-0.75	-45/90	-49/194	–	–

■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on hold-down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with EU 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration threshold | Complies with Japanese MHLW Notification 370

<sup>3)</sup> ● = available | – = not available | empty cells = not tested

<sup>4)</sup> More materials and colors on request

Forbo

MOVEMENT SYSTEMS

I-32 Siegling Prolink Engineering Manual - 01/2024

Belt type naming

Belt-specific properties, picture and drawing

Main dimensions, design recommendations

Belt materials and color, basic physical properties, compliances

**Note:** Please be aware that belt widths can be achieved and are calculated using minimum belt widths and multiples of width increments only. Furthermore, belt widths vary depending on the choice of material.

All dimensions are measured at 21° Celsius (69.8° Fahrenheit). Always consider the thermal expansion coefficient of the material. Belt widths change with temperature. For actual belt widths under your specific operating conditions, request information from your local Forbo Movement Systems representative. More information is given in Section 4.4.

**Note:** Dimensions r1 to r5 refer to the minimum design radius of belt turns and support rollers.

Dimensions are as follows: r1 = side flex radius, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on hold-down shoe, r5 = back flex on roller. For further explanations see "Minimum design radii" in Appendix 6.3.


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 1**

Straight running belts  
Pitch 50 mm (1.97 in)

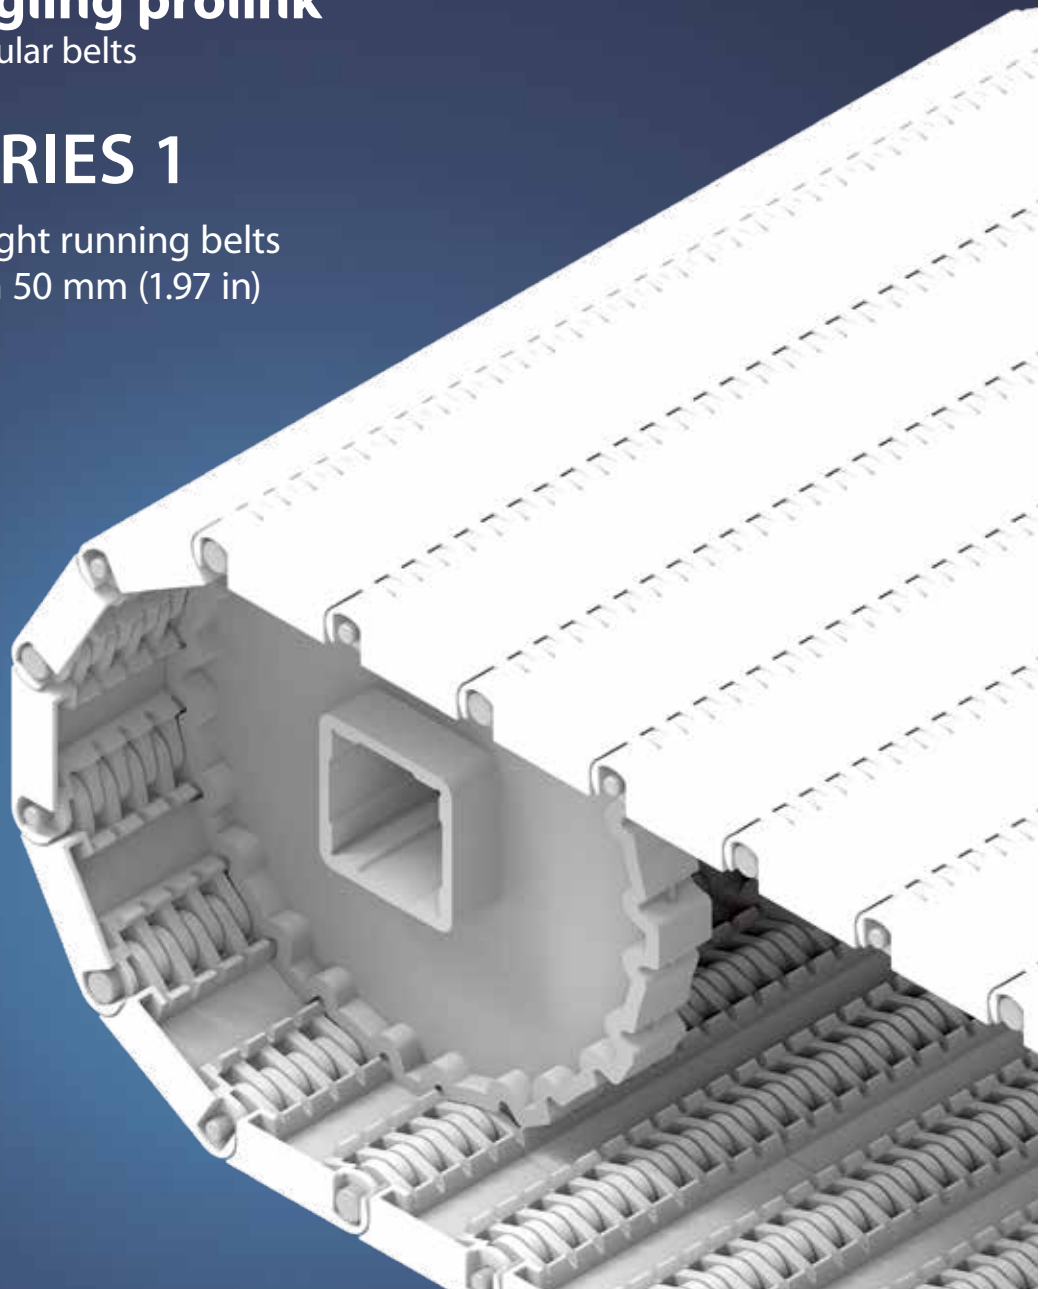


# SERIES 1 | OVERVIEW

**siebling prolink**  
modular belts

Straight running belts | Pitch 50 mm (1.97 in)

Belts for medium to heavy-duty industrial conveying applications

Side view scale 1:1

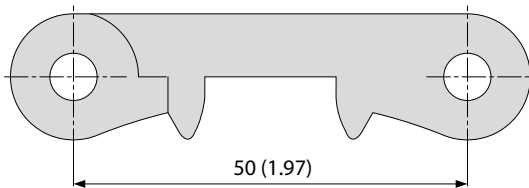


## Design characteristics

- Narrow, closed hinge design provides high belt pull capacity
- Rigid module design makes belt suitable for long conveyors
- Closed solid edge design

## Basic data

Pitch	50 mm (1.97 in)
Belt width min.	80 mm (3.15 in) 250 mm (9.8 in) for belts with FRT-pattern (side modules only available without FRT-pattern)
Width increments	10 mm (0.4 in)
Hinge pins	6 mm (0.24 in) made of plastic (PBT, PP, PE). One-piece up to a belt width of 1200 mm (47 in).

Available surface pattern and opening area

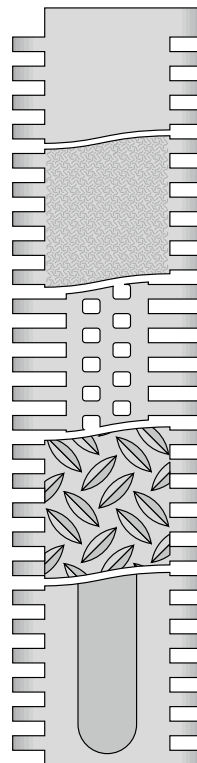

### S1-0 FLT

Closed, smooth surface

### S1-0 SRS

Closed, slip-resistant surface

### S1-18 FLT

Open (18%), smooth surface

### S1-0 NSK


Closed surface and non skid pattern

### S1-0 FRT1

Closed surface with friction top


## Sprockets

in different sizes with round or square bore

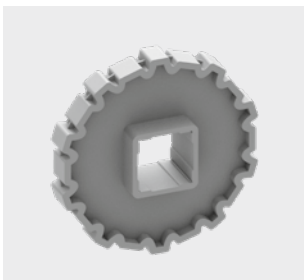

## Profiles

in different heights and designs for inclines

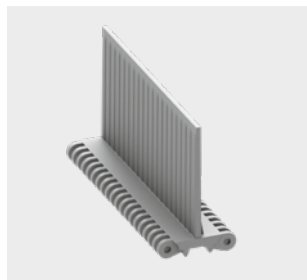

## Side guards

in different heights for retention of bulk products




# SERIES 1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S1-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

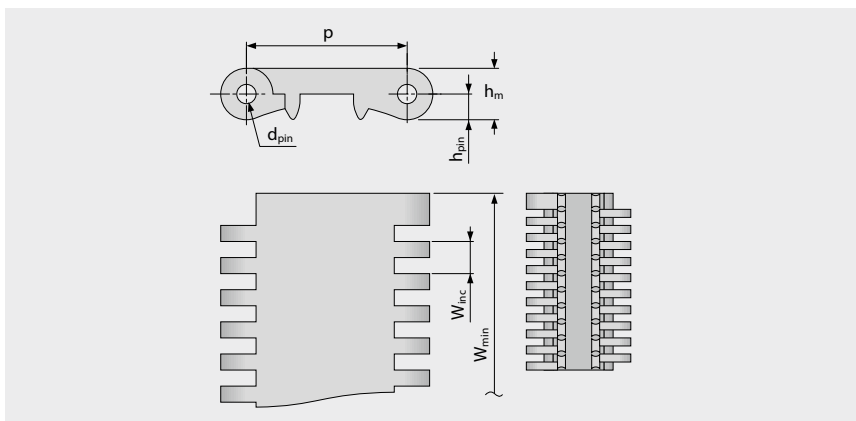

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	80.0	10.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	3.15	0.39	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	18	1233	10.1	2.07	-0.35	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	40	2741	14.4	2.95	-0.75	-45/90	-49/194	●	●	●
POM	AT	PBT	UC	40	2741	14.4	2.95	-0.75	-45/90	-49/194			
PP	WT	PP	WT	30	2056	9.4	1.93	0.0	5/100	41/212	●	●	●
PP	AT	PP	WT	30	2056	9.4	1.93	0.0	5/100	41/212			

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S1-0 SRS | 0% Opening | Slip-resistant surface

Closed surface | Slip-resistant surface, pleasant to walk and kneel on

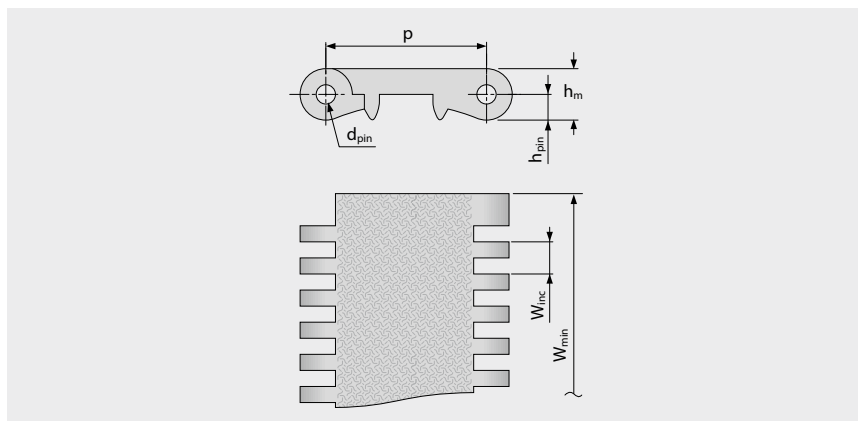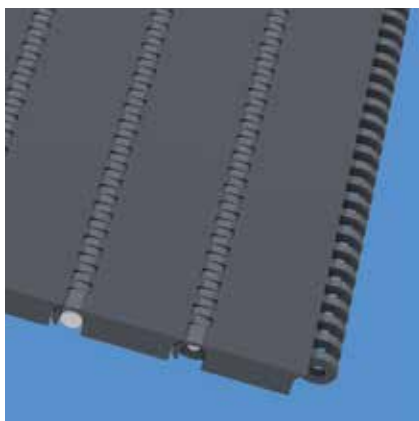

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	80.0	10.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	3.15	0.0	2.03	0.39	±0.2	–	1.97	3.94	5.91	1.97

### Mold to order belts<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	AT	PBT	UC	40	2741	14.4	2.95	-0.75	-45/90	-49/194			
POM-HC	AT	PBT	UC	40	2741	14.8	3.03	-0.75	-45/90	-49/194	–	–	
PXX-HC	BK	PBT	UC	20	1370	10.3	2.11	0.0	5/100	41/212	–	–	

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS






# SERIES 1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S1-18 FLT | 18% Opening | Flat top

Open version (18%) for excellent air circulation and drainage | 66% contact area (Largest opening: 4.6 x 6 mm/0.18 x 0.24 in) | Flat top surface | Smooth surface

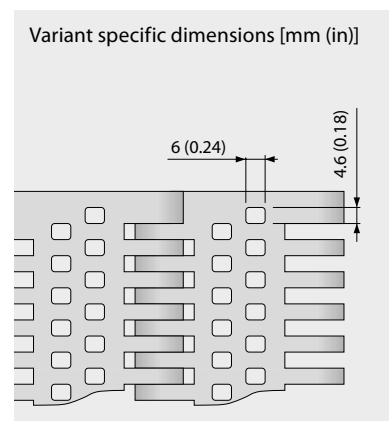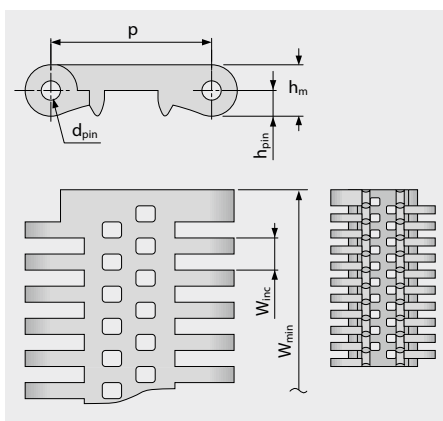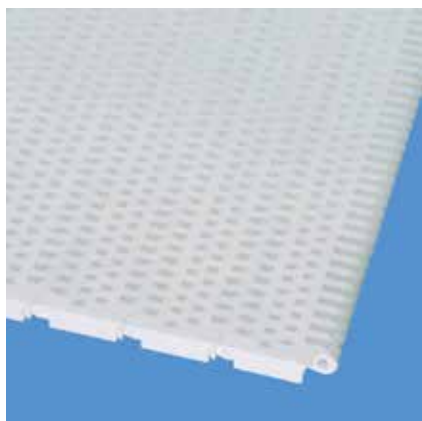

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	80.0	10.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	3.15	0.39	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	UC	PE	UC	18	1233	8.8	1.80	0.15	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	40	2741	12.7	2.60	-0.7	-45/90	-49/194	●	●	●
PP	WT	PP	WT	30	2056	8.2	1.68	0.0	5/100	41/212	●	●	●

□ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S1-0 NSK | 0 % Opening | Non skid

Closed surface | Non skid surface for increased safety when walking on belt

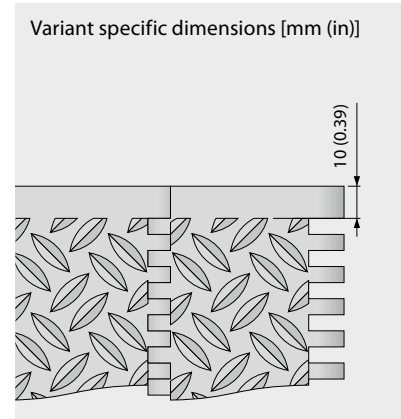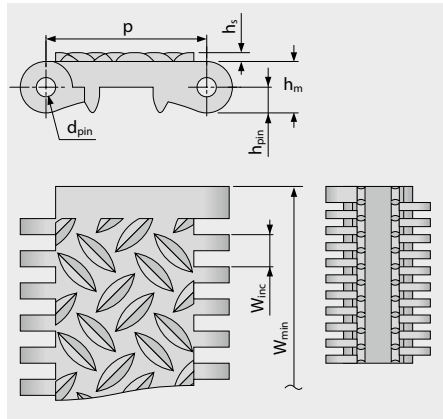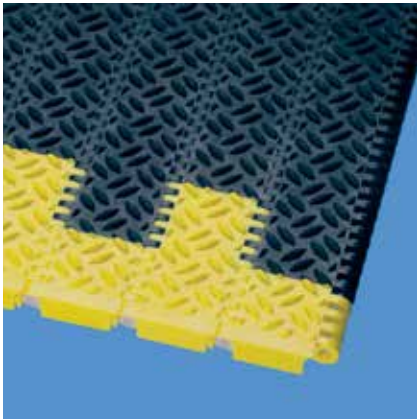

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	2.8	80.0	10.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.11	3.15	0.39	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	AT	PBT	UC	40	2741	16.0	3.28	-0.75	-45/90	-49/194			
POM-HC	AT	PBT	UC	40	2741	16.0	3.28	-0.75	-45/90	-49/194	–	–	
POM	YL	PBT	UC	40	2741	16.0	3.28	-0.75	-45/90	-49/194			

■ AT (Anthracite), □ UC (Uncolored), ■ YL (Yellow)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S1-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top with replaceable rubber pads for increased grip

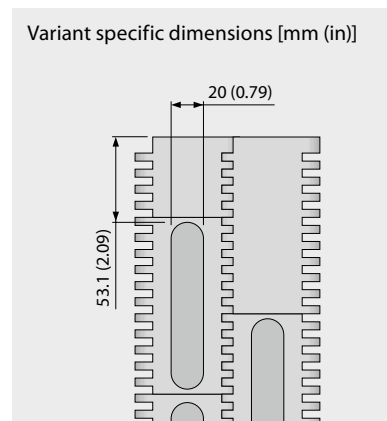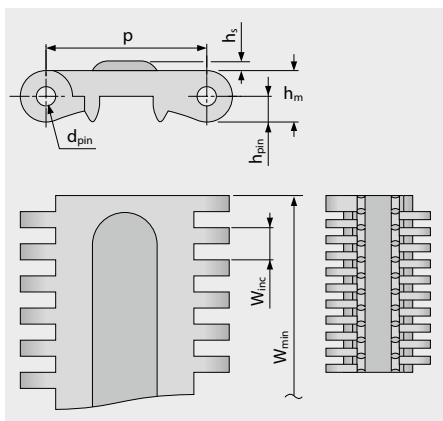

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	3.0	250.0	10.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.12	9.84	0.39	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	WT	PBT	UC	R2	BK	40	2741	15.0	3.07	-0.75	-45/90	-49/194	–	–	

■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request




MOVEMENT SYSTEMS

# SERIES 1 | SPROCKETS

Straight running belt | Pitch 50 mm (1.97 in)

**siebling prolink**  
modular belts

## S1 SPR | Sprockets

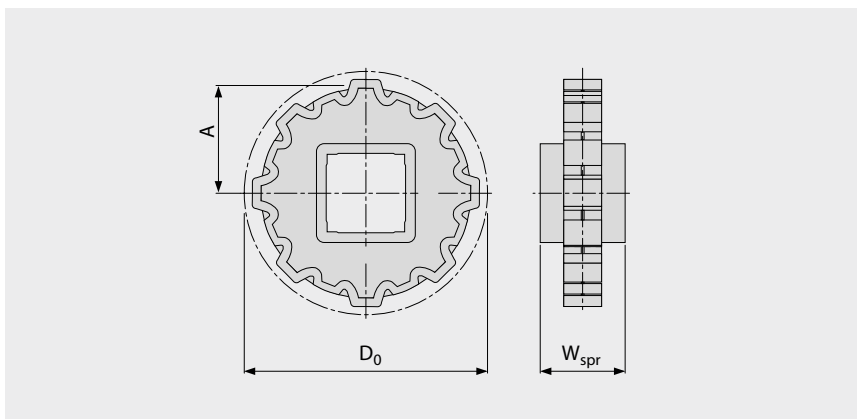

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z8	Z10	Z12	Z16
$W_{spr}$	mm	40.0	40.0	40.0	40.0	40.0
	inch	1.57	1.57	1.57	1.57	1.57
$D_0$	mm	100.0	130.8	161.8	193.2	256.3
	inch	3.94	5.15	6.37	7.61	10.09
$A_{max}$	mm	42.0	57.4	72.9	88.6	120.1
	inch	1.65	2.26	2.87	3.49	4.73
$A_{min}$	mm	36.4	53.0	69.3	85.6	117.8
	inch	1.43	2.09	2.73	3.37	4.64

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

25	mm			○		
30	mm	●	●	●		
40	mm	■	■	■	■	■
60	mm		■	■	■	■
80	mm				■	■
1	inch	●	○	○		
1.5	inch	■	■	■		
2.5	inch				□	■

Material: POM, Color: UC

□ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS


# SERIES 1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S1-0 FLT PMC


Flat top surface for dry products | No cling surface to improve release of wet and sticky products

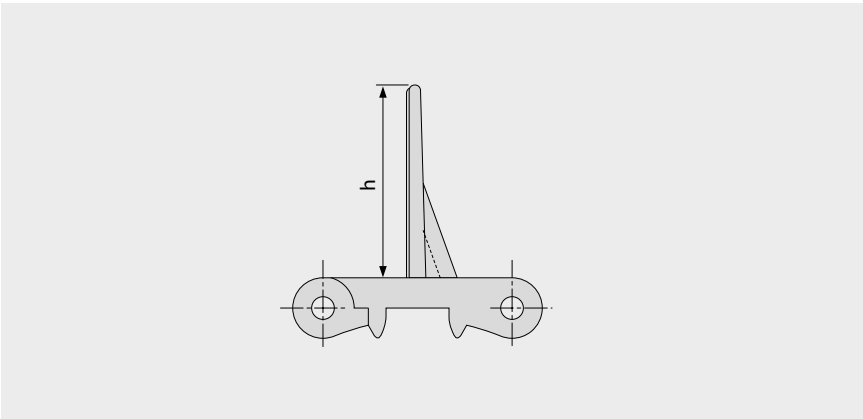

### Basic data

Material	Color	Height (h)	
		50 mm 2 inch	100 mm 4 inch
PE	WT	●	●
POM	AT	●	
POM	WT	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

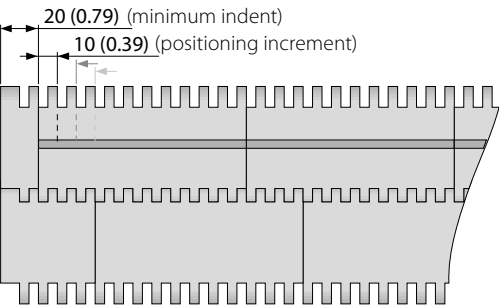

Standard configuration S1-0 FLT PMC

■ AT (Anthracite), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




# SERIES 1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S1-18 FLT PMC


Open version (18%) base module for drainage | No cling surface to improve release of wet and sticky products

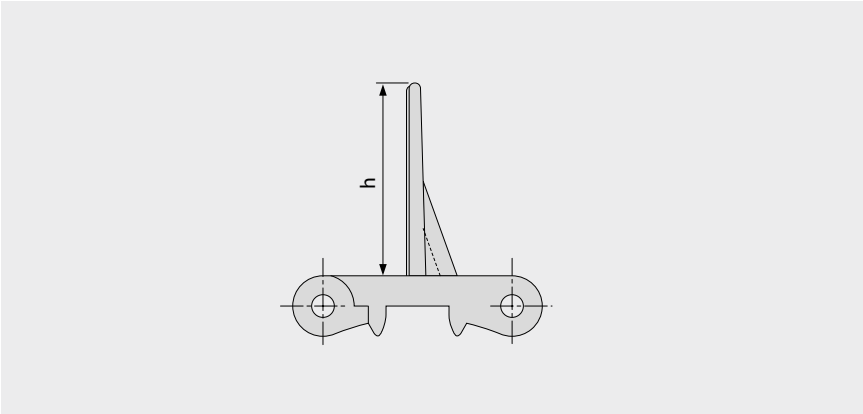

### Basic data

Material	Color	Height (h)	
		50 mm 2 inch	100 mm 4 inch
PE	UC	●	●
POM	WT	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

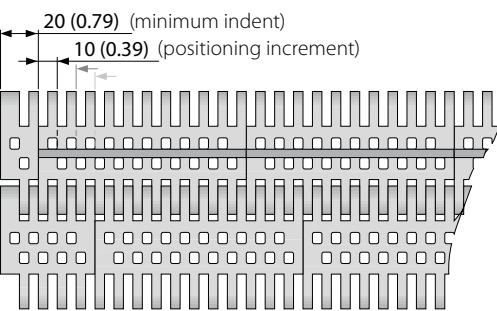

Standard configuration S1-18 FLT PMC

□ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




# SERIES 1 | SIDE GUARDS

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)


## S1 SG | Side guards

For retention of bulk products

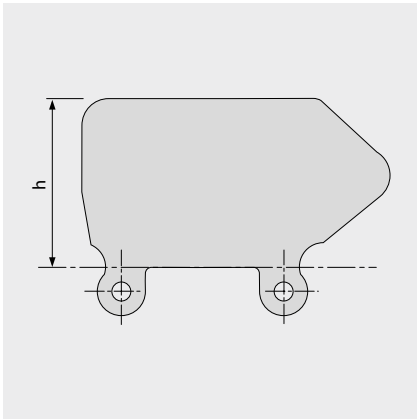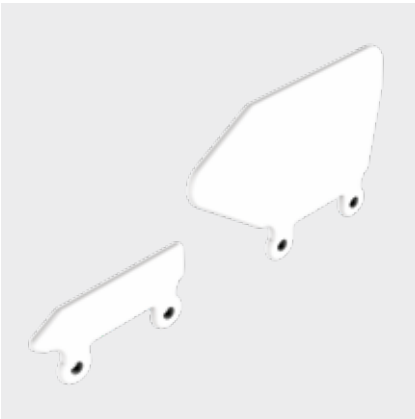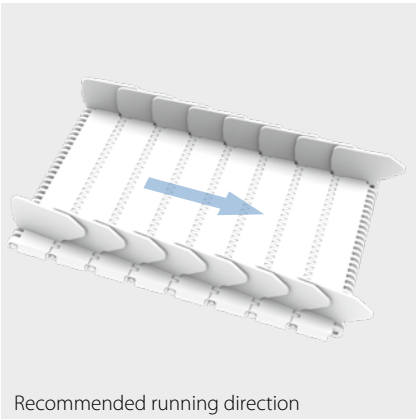

### Basic data

Material	Color	Height (h)			
		25 mm 1 inch	50 mm 2 inch	75 mm 3 inch	100 mm 4 inch
PE	LB	●	●	●	●
PE	WT	●	●	●	●
PE-MD	BL		●	●	●
PP	LB	●	●	●	●
PP	WT	●	●	●	●

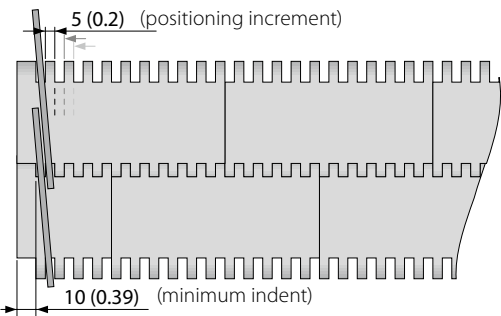

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 2**

Straight running belts  
Pitch 25 mm (0.98 in)

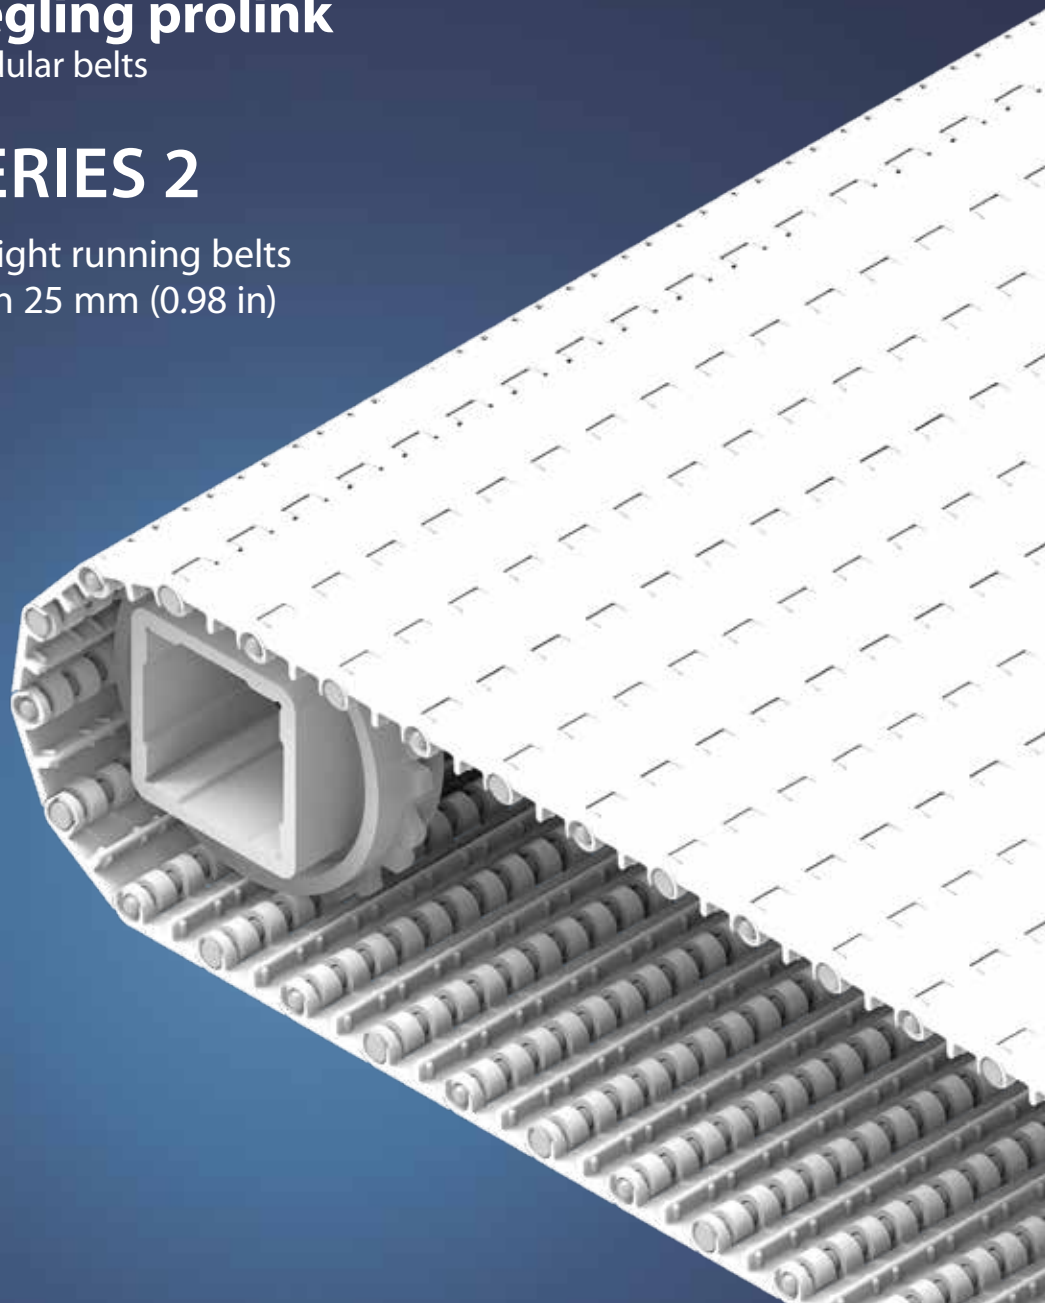


# SERIES 2 | OVERVIEW

**siegling prolink**  
modular belts

Straight running belts | Pitch 25 mm (0.98 in)

## Belts for light-duty food and container handling applications

### Side view scale 1:1

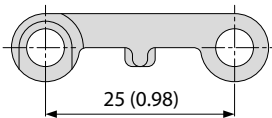


### Design characteristics

- Hinges that open wide provides an easy-to-clean belt design
- Low belt weight reduces energy consumption
- Open edge design on flat top versions for unhindered drainage and closed edge design on grid top and raised rib versions

### Basic data

Pitch	25 mm (0.98)
Belt width min.	50 mm (1.97 in) 100 mm (3.9 in) for belts with FRT-pattern
Width increments	16.66 mm (0.7 in)
Hinge pins	5 mm (0.2 in) Made of plastic (PBT, PP, PE)

### Available surface pattern and opening area

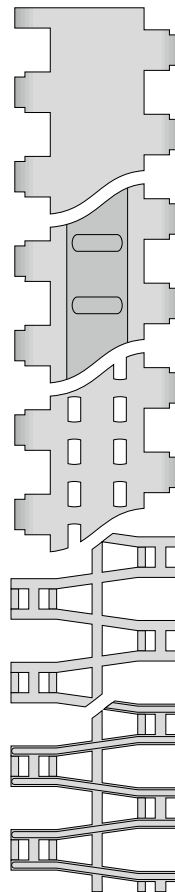

#### S2-0 FLT

Closed, smooth surface

#### S2-0 FRT1

Closed surface with friction top

#### S2-12 FLT

Open (12 %), smooth surface

#### S2-57 GRT

Open (57 %), grid top surface

#### S2-57 RRB

Open (57 %), raised rib surface


### Sprockets

in different sizes with round or square bore



### Profiles

in different heights and designs for inclines

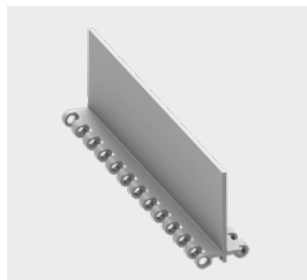


### Side guards

in different heights for retention of bulk products



### Finger plates

For raised rib types

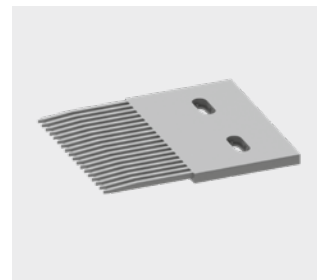




# SERIES 2 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

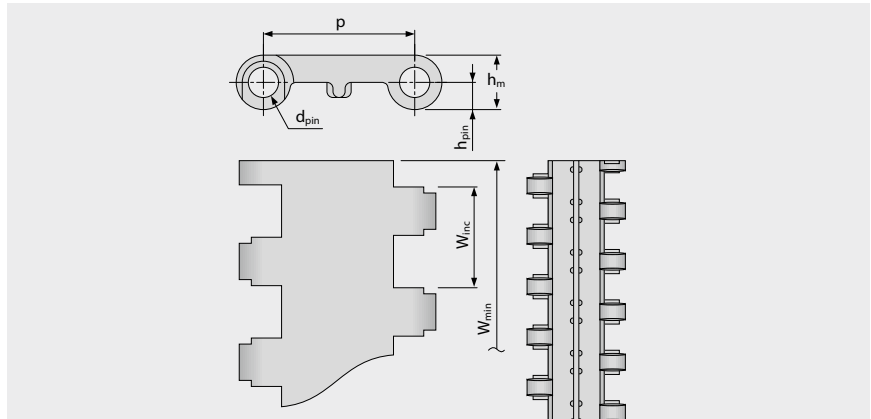

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	9.0	4.5	0.0	50.0	16.7	±0.2	–	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.35	0.18	0.0	1.97	0.66	±0.2	–	0.98	1.97	2.95	0.98

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	3	206	3.9	0.8	-0.2	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	7	480	5.7	1.17	-0.3	-45/90	-49/194	●	●	●
POM	BL	PBT	BL	7	480	5.7	1.17	-0.3	-45/90	-49/194	●	●	●
PP	WT	PP	WT	5	343	3.7	0.76	0.25	5/100	41/212	●	●	●
PP	BL	PP	BL	5	343	3.7	0.76	0.25	5/100	41/212	●	●	●

Mold to width available in: 50 mm (1.97 in), 100 mm (3.94 in), 200 mm (7.87 in)

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 2 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top provides increased grip

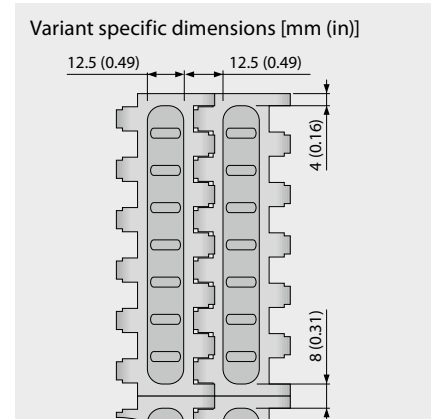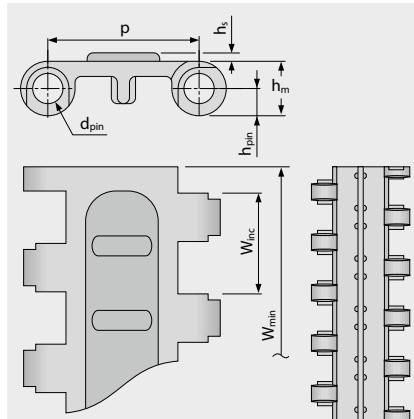

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	9.0	4.5	1.4	100.0	16.7	±0.2	–	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.35	0.18	0.06	3.94	0.66	±0.2	–	0.98	1.97	2.95	0.98

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation [%]	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]		[°C]	[°F]	FDA	EU	MHLW
POM	WT	PBT	UC	R3	TQ	7	480	5.7	1.17	-0.3	-45/65	-49/149			

Mold to width available in: 100 mm (3.94 in)

■ TQ (Turquoise), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 2 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-12 FLT | 12 % Opening | Flat top

Open version (12 %) for excellent air circulation and drainage | 83 % contact area (Largest opening: 5 x 3 mm/0.2 x 0.12 in) | Flat top surface | Smooth surface

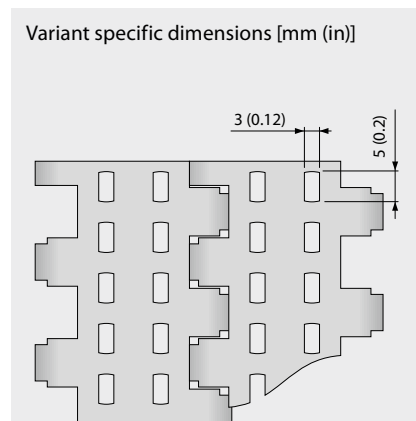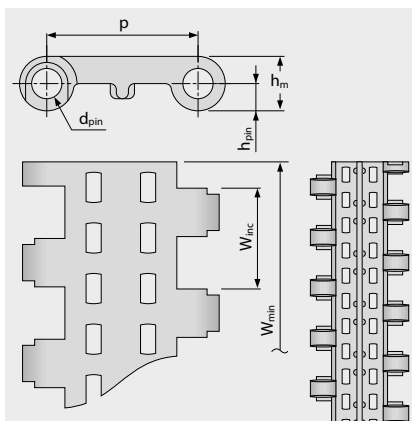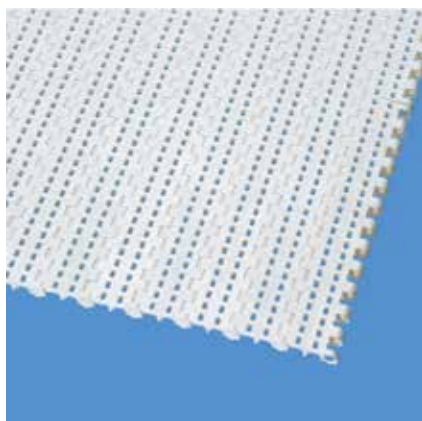

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	9.0	4.5	0.0	50.0	16.7	±0.2	–	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.35	0.18	0.0	1.97	0.66	±0.2	–	0.98	1.97	2.95	0.98

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	3	206	3.7	0.76	0.0	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	7	480	5.4	1.11	-0.1	-45/90	-49/194	●	●	●
PP	WT	PP	WT	5	343	3.5	0.72	0.2	5/100	41/212	●	●	●

Mold to width available in: 50 mm (1.97 in), 100 mm (3.94 in), 200 mm (7.87 in)

□ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 2 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-57 GRT | 57 % Opening | Grid top

Large open area (57 %) allows minimal product contact | 37 % contact area (Largest opening:  $\varnothing = 7 \text{ mm}/0.28 \text{ in}$ ) |  
For excellent air circulation and drainage | Grid top surface

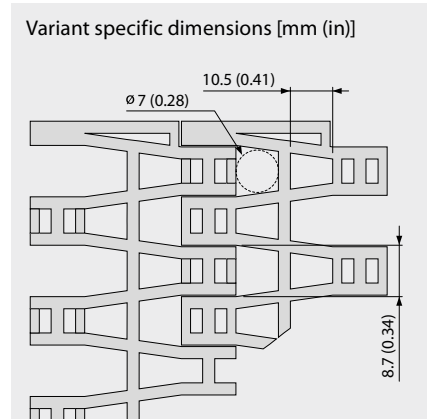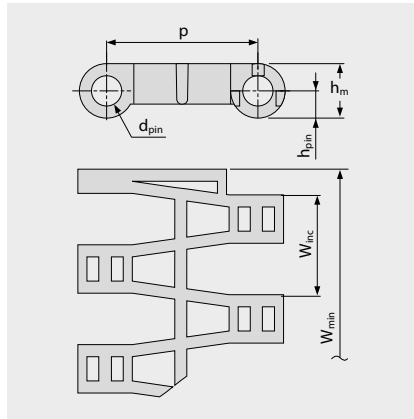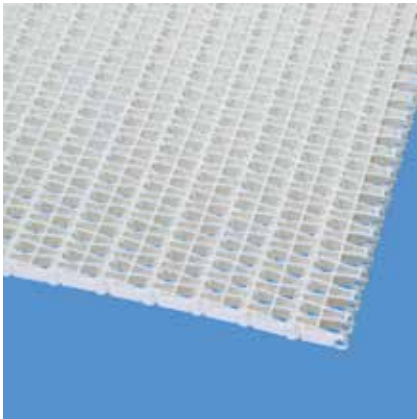

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	9.0	4.5	0.0	50.0	16.7	±0.2	–	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.35	0.18	0.0	1.97	0.66	±0.2	–	0.98	1.97	2.95	0.98

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	UC	PE	UC	3	206	3.4	0.7	-0.2	-70/65	-94/149	●	●	●
PE	DB	PE	DB	3	206	3.4	0.7	-0.2	-70/65	-94/149	●	●	●
POM	UC	PBT	UC	7	480	4.8	0.98	-0.2	-45/90	-49/194	●	●	●
POM	BL	PBT	BL	7	480	4.8	0.98	-0.2	-45/90	-49/194	●	●	●
PP	WT	PP	WT	5	343	3.3	0.68	0.2	5/100	41/212	●	●	●
PP	BL	PP	BL	5	343	3.3	0.68	0.2	5/100	41/212	●	●	●

Mold to order belts													
PA-HT	BK	PA-HT	BK	5	343	4.0	0.82	1.3	-30/155	-22/311	–	–	

■ BK (Black), ■ BL (Blue), ■ DB (Dark blue), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 2 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-57 RRB | 57 % Opening | Raised rib

Large open area (57 %) for excellent air circulation and drainage | Raised ribs for minimal product contact (28 % contact area (Largest opening:  $\varnothing = 7 \text{ mm}/0.28 \text{ in}$ ) and smooth product transfer using finger transfer plates

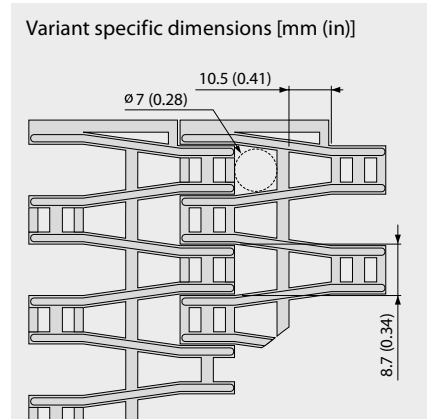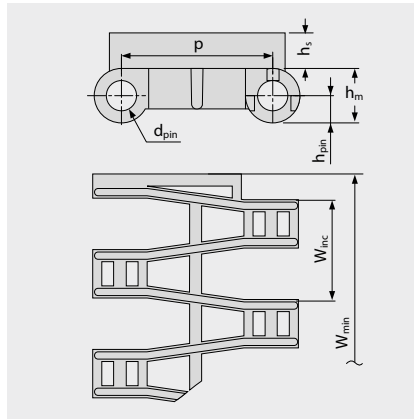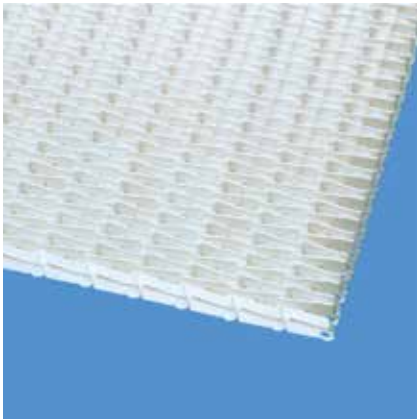

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	9.0	4.5	5.5	50.0	16.7	±0.2	–	25.0	50.0	75.0	50.0
inch	0.98	0.2	0.35	0.18	0.22	1.97	0.66	±0.2	–	0.98	1.97	2.95	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	
POM	BL	PBT	BL	7	480	6.2	1.27	-0.2	-45/90	-49/194	●	●	●
PP	WT	PP	WT	5	343	4.2	0.86	0.2	5/100	41/212	●	●	●

Mold to order belts													
PE		PE		3	206	4.3	0.88	-0.2	-70/65	-94/149			

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS





# SERIES 2 | SPROCKETS

Straight running belt | Pitch 25 mm (0.98 in)

**siegling prolink**  
modular belts

## S2 SPR | Sprockets

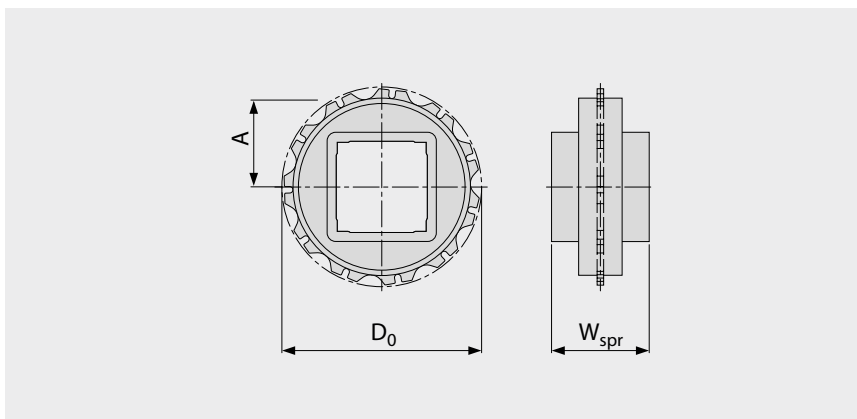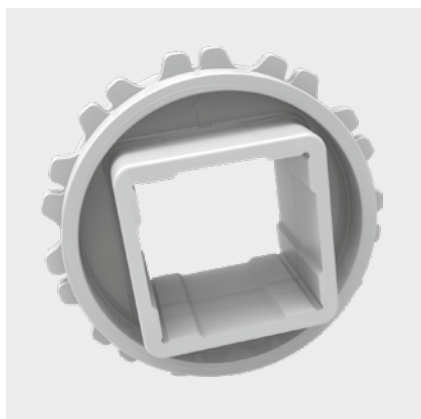

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z11	Z19	Z20
W <sub>spr</sub>	mm	25.0	40.0	40.0	40.0
	inch	0.98	1.57	1.57	1.57
D <sub>0</sub>	mm	50.4	89.5	153.1	161.1
	inch	1.98	3.52	6.03	6.34
A <sub>max</sub>	mm	20.7	40.2	72.1	76.0
	inch	0.81	1.58	2.84	2.99
A <sub>min</sub>	mm	17.9	38.6	71.1	75.1
	inch	0.71	1.52	2.80	2.96

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

25	mm	● / ■	●		
30	mm		●		
40	mm		■	■	■
60	mm			■	
80	mm			■	
0.75	inch				
1	inch	○ / □	● / ■		
1.5	inch		■	■	
2.5	inch			□	

Material: POM, Color: UC

□ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS


# SERIES 2 | PROFILES

**siegling prolink**  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)

## S2-0 FLT PMU


Flat top surface for dry products

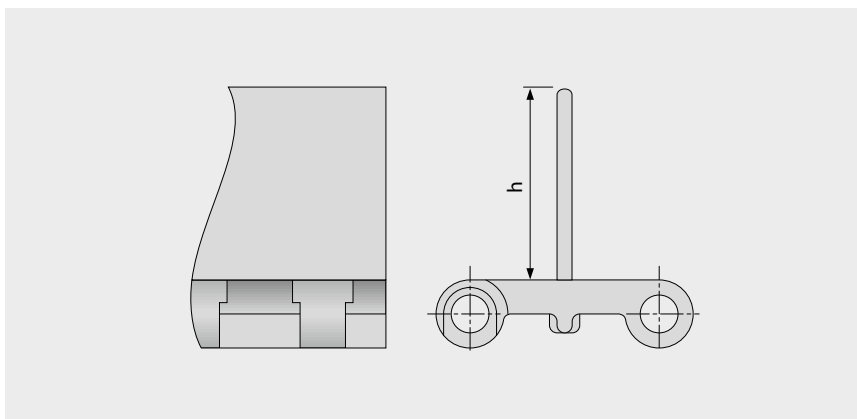


### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
PE	WT	●	●
POM	BL	●	●
POM	WT	●	●
PP	BL	●	●
PP	GN	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

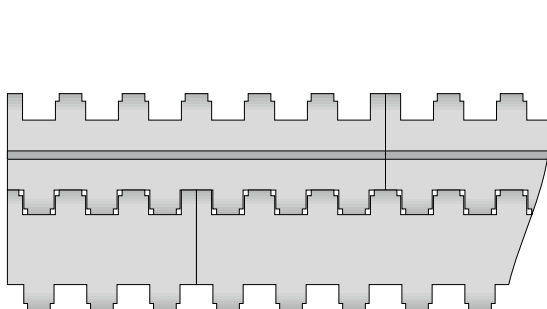

Standard configuration S2-0 FLT PMU

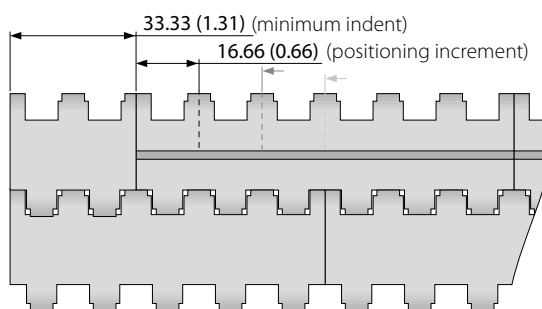

Indent configuration S2-0 FLT PMU

■ BL (Blue), ■ GN (Green), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 2 | PROFILES

siebling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)


## S2-57 GRT PMC

Open version (57 %) base module for good drainage

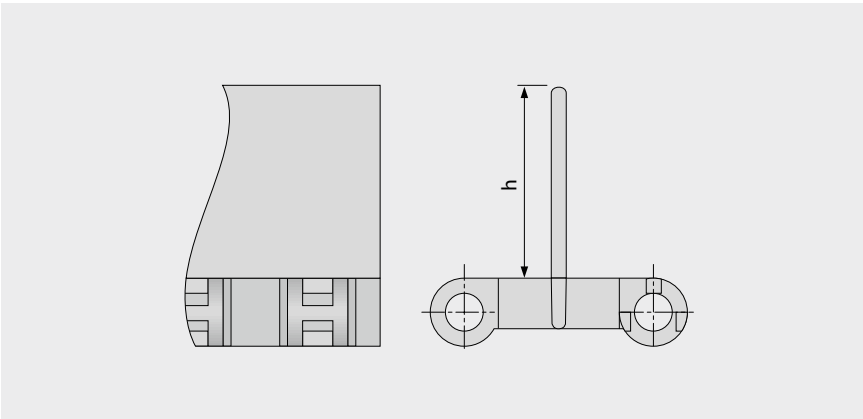


### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
PE	UC	●	●
POM	BL	●	●
POM	UC	●	●
PP	BL	●	●
PP	WT	●	●

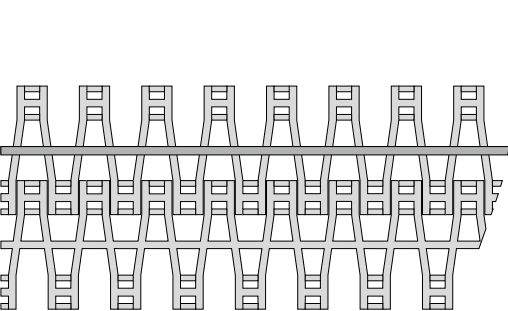

Standard configuration S2-57 GRT PMC

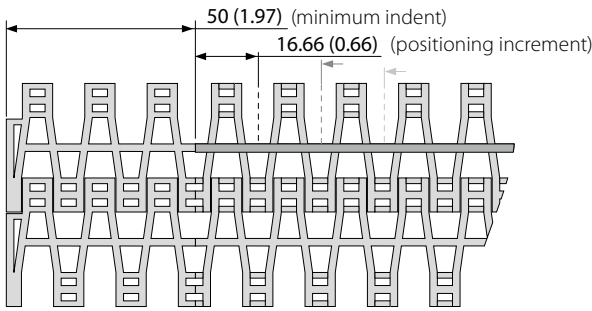

Indent configuration S2-57 GRT PMC

■ BL (Blue), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 2 | SIDE GUARDS

siegling prolink  
modular belts

Straight running belt | Pitch 25 mm (0.98 in)


## S2 SG | Side guards

For retention of bulk products

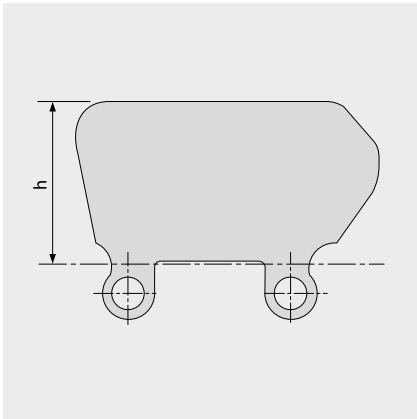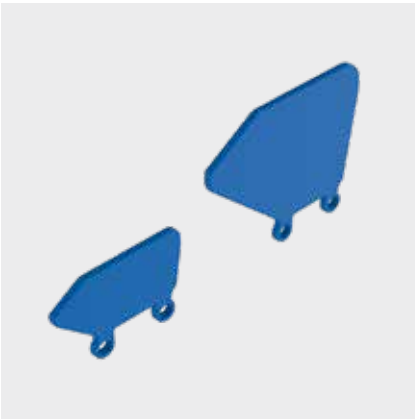

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
PE	BL	●	●
PE	WT	●	●
PP	BL	●	●
PP	WT	●	●

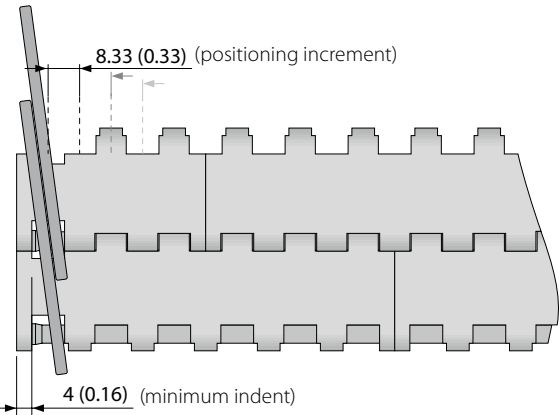

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 4.1**

Straight running belts  
Pitch 14 mm (0.55 in)

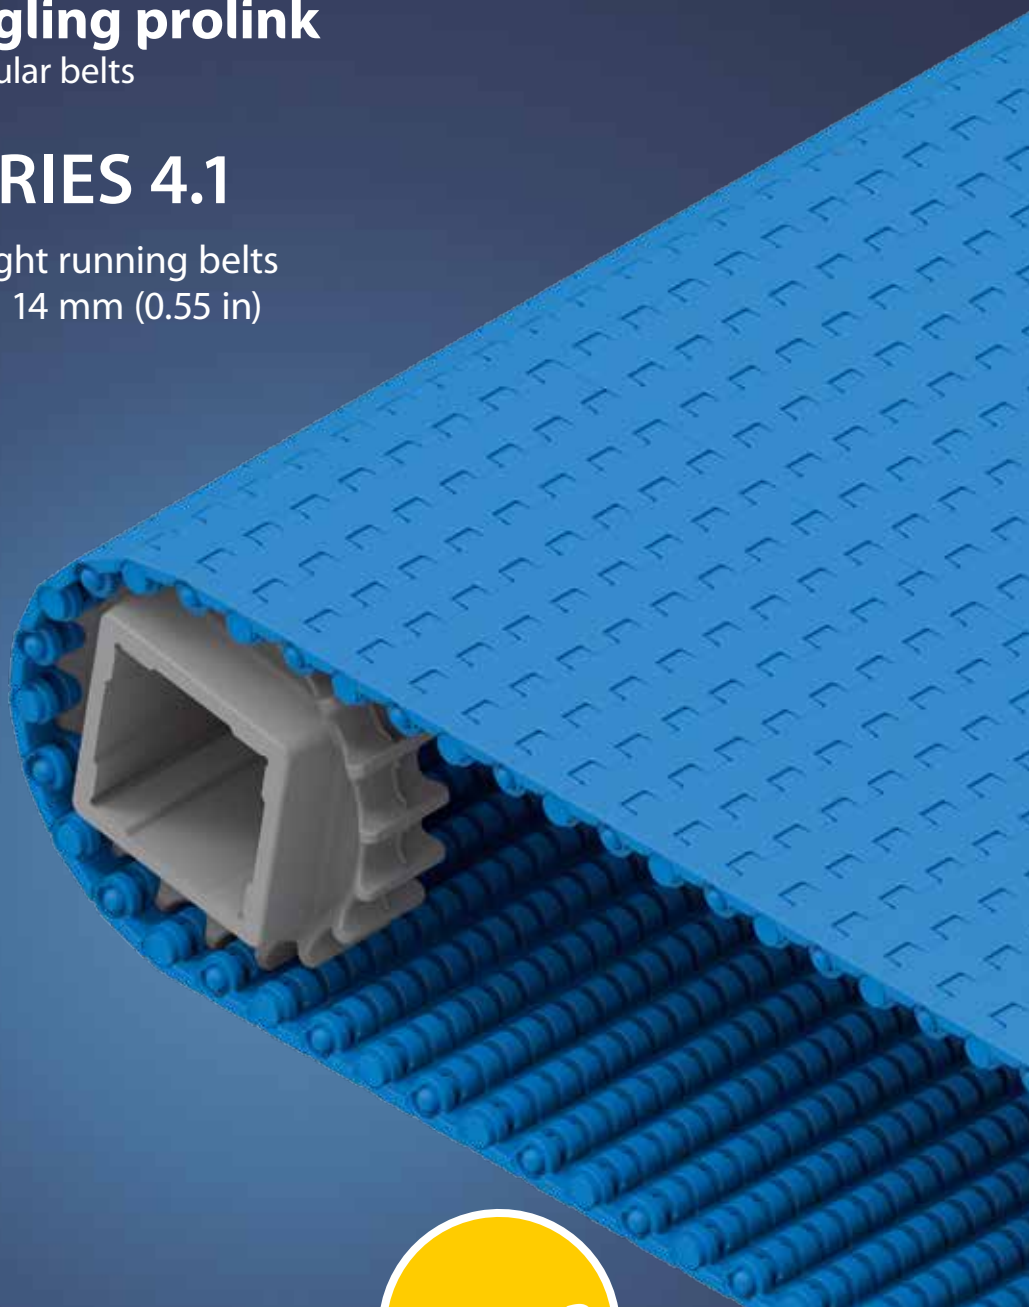

**PATENTED**


# SERIES 4.1 | OVERVIEW

**siebling prolink**  
modular belts

Straight running belts | Pitch 14 mm (0.55 in)

Belts for light to medium-duty food and non-food applications

## Side view scale 1:1




## Design characteristics

- Small pitch belt for applications requiring small transfer gaps
- Hinges that open wide and flat channels on the underside ensure the belt is easy to clean
- Unique sprocket design with rounded tooth edges provides ideal load distribution
- Wide sprocket teeth ensure superior sprocket engagement and strength

## Basic data

Pitch	14 mm (0.55 in)
Belt width min.	25 mm (0.98)
Width increments	12.5 mm (0.5 in)
Hinge pins	5 mm (0.2 in) made of plastic (PBT, PP, PE, POM-MD). One-piece up to a belt width of 1200 mm (47 in).

## Available surface pattern and opening area

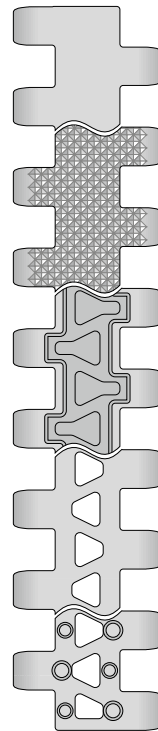

### S4.1-0 FLT

Closed, smooth surface

### S4.1-0 NPY

Closed surface with negative pyramid pattern

### S4.1-0 FRT1

Closed surface with friction top

### S4.1-21 FLT

Open (21 %), smooth surface

### S4.1-21 NTP

Open (21 %) surface with round studs. Version available without round studs at the side (25 mm indent)



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)


## Sprockets

in different sizes with round or square bore




## Profiles

in different heights and designs for inclines

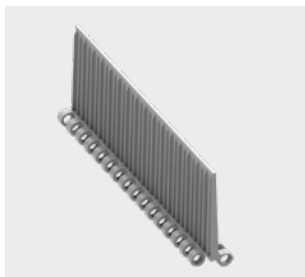

## ProSnap

Quick-Release for easy opening and closing of the belt

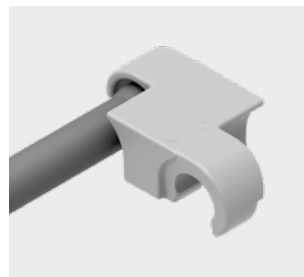





# SERIES 4.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

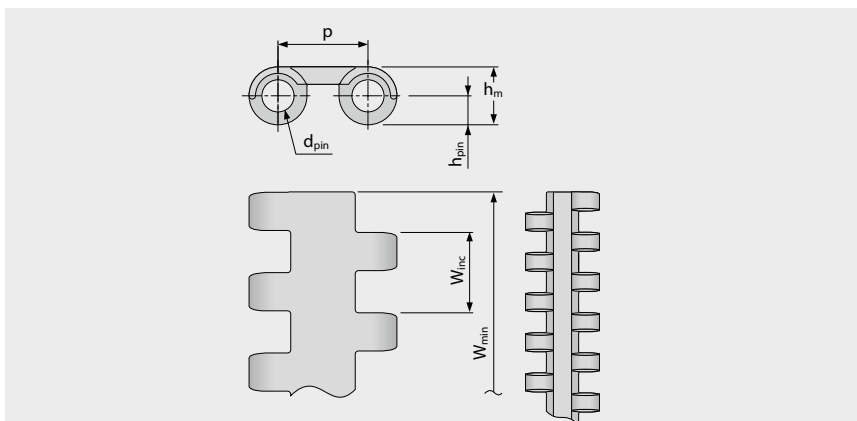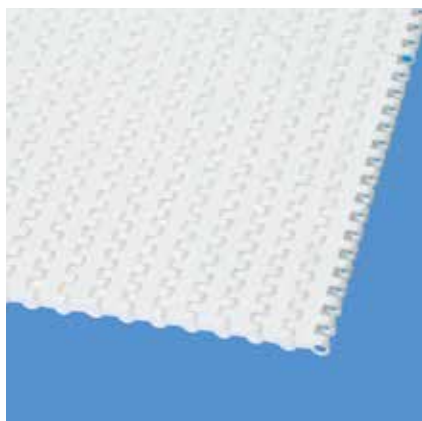

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	14.0	5.0	9.0	4.5	0.0	25.0	12.5	±0.2	–	11.0	25.0	38.0	12.5
inch	0.55	0.2	0.35	0.18	0.0	0.98	0.49	±0.2	–	0.43	0.98	1.5	0.49

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	3	206	5.1	1.04	-0.1	-70/65	-94/149	●	●	●
PE	UC	PBT	UC	3	206	5.1	1.04	-0.1	-70/65	-94/149	●	●	●
PE	BL	PE	UC	3	206	5.1	1.04	-0.1	-70/65	-94/149	●	●	●
POM	BL	PBT	BL	10	685	7.1	1.45	0.0	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	10	685	7.1	1.45	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	BL	5	343	4.6	0.94	0.25	5/100	41/212	●	●	●
PP	WT	PP	WT	5	343	4.6	0.94	0.25	5/100	41/212	●	●	●
POM-MD	BL	POM-MD	BL	10	685	7.5	1.54	0.0	-45/90	-49/194	●	●	●
Mold to order belts													
PXX-HC	BK	PBT	UC	5	343	5.1	1.04	0.25	5/100	41/212			

Mold to width available in: 38 mm (1.5 in), 50 mm (1.97 in), 100 mm (3.94 in), 125 mm (4.92 in), 200 mm (7.87 in)

■ BL (Blue), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 4.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1-0 NPY | 0 % Opening | Negative pyramid

Closed surface | Negative pyramid pattern for superb release characteristics when conveying wet or sticky products

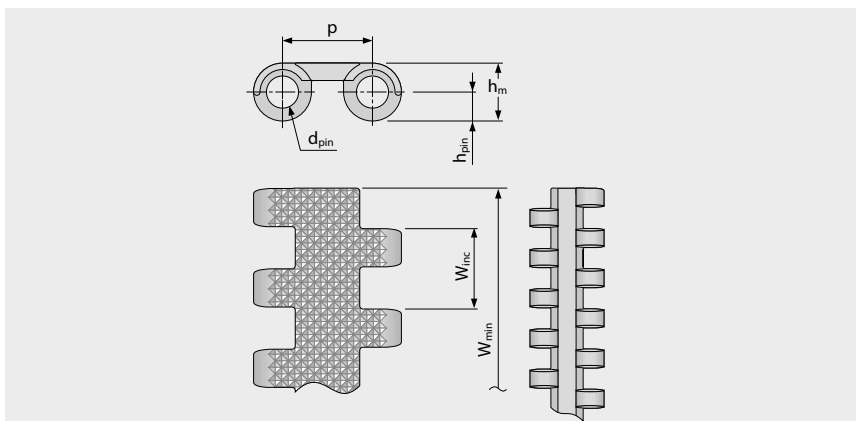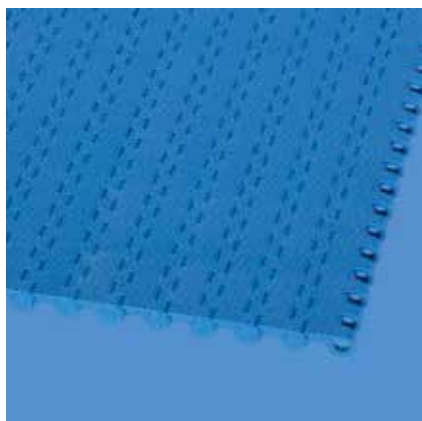

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	14.0	5.0	9.0	4.5	0.0	25.0	12.5	±0.2	–	11.0	25.0	38.0	12.5
inch	0.55	0.2	0.35	0.18	0.0	0.98	0.49	±0.2	–	0.43	0.98	1.5	0.49

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	BL	PE	UC	3	206	5.1	1.04	-0.1	-70/65	-94/149	●	●	●
POM	BL	PBT	BL	10	685	7.1	1.45	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	BL	5	343	4.6	0.94	0.25	5/100	41/212	●	●	●

Mold to width available in: 200 mm (7.87 in)

■ BL (Blue), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 4.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top with slightly elevated triangular shapes to reduce contact area/increase contact pressure to optimise grip and to channel dirt away from the friction surface

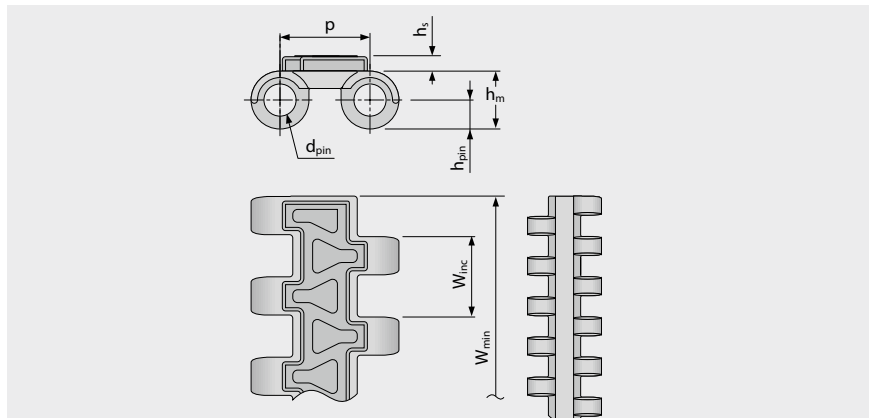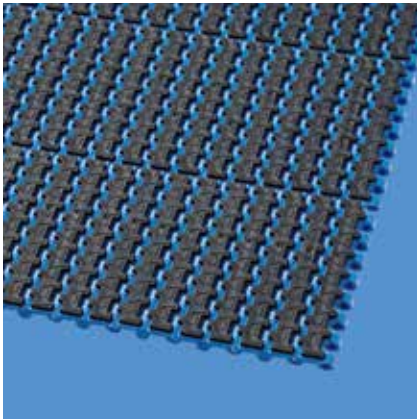

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	14.0	5.0	9.0	4.5	2.4	50.0	12.5	±0.2	–	11.0	25.0	38.0	16.5
inch	0.55	0.2	0.35	0.18	0.09	1.97	0.49	±0.2	–	0.43	0.98	1.5	0.65

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	R8	BG	3	206	6.8	1.39	-0.1	-70/65	-94/149	●	●	●
POM	BL	PBT	BL	R6	BK	10	685	9.4	1.93	0.0	-45/60	-49/140	–	–	–
PP	BL	PP	BL	R7	BK	5	343	6.9	1.41	0.25	5/100	41/212	●	●	●
PP	WT	PP	WT	R7	BG	5	343	6.9	1.41	0.25	5/100	41/212	●	●	●

Mold to order belts														
PXX-HC	BK	PBT	UC	R7	BK	5	343	7.3	1.5	0.25	5/100	41/212	–	–

Mold to width available in: 50 mm (1.97 in), 125 mm (4.92 in), 200 mm (7.87 in)

■ BG (Beige), ■ BL (Blue), ■ BK (Black), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 4.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1-21 FLT | 21 % Opening | Flat top

Large open area (21 %) for excellent air circulation and drainage | 70 % contact area (Largest opening:  $\varnothing = 3.8$  mm/0.15 in) | Smooth surface

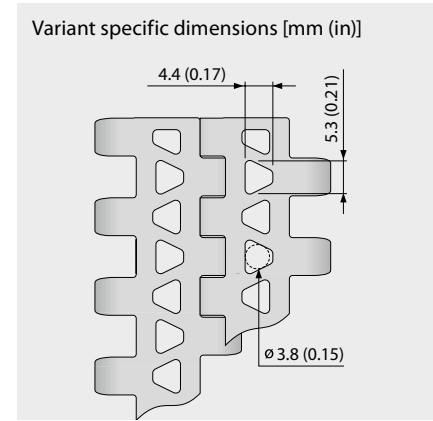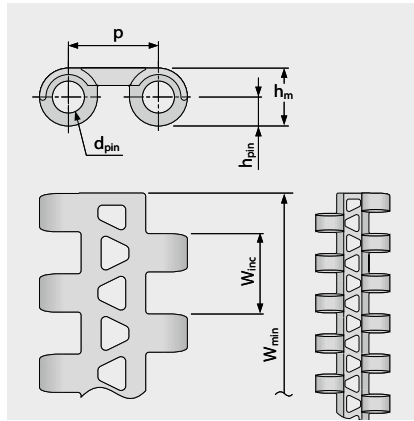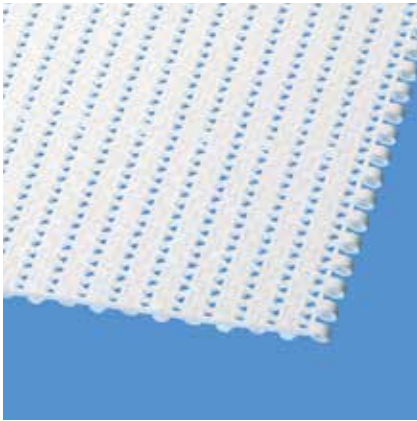

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	14.0	5.0	9.0	4.5	0.0	25.0	12.5	±0.2	–	11.0	25.0	38.0	12.5
inch	0.55	0.2	0.35	0.18	0.0	0.98	0.49	±0.2	–	0.43	0.98	1.5	0.49

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	UC	3	206	4.5	0.92	-0.1	-70/65	-94/149	●	●	●
PE	UC	PBT	UC	3	206	4.5	0.92	-0.1	-70/65	-94/149	●	●	●
PE	BL	PE	UC	3	206	4.5	0.92	-0.1	-70/65	-94/149	●	●	●
POM	BL	PBT	BL	10	685	6.5	1.33	0.0	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	10	685	6.5	1.33	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	BL	5	343	4.1	0.84	0.25	5/100	41/212	●	●	●
PP	WT	PP	WT	5	343	4.1	0.84	0.25	5/100	41/212	●	●	●

Mold to order belts													
PA-HT	BK	PA-HT	BK	10	685	6.4	1.31	1.4	-30/155	-22/311	–	–	–
POM-MD	BL	POM-MD	BL	10	685	6.9	1.41	0.0	-45/90	-49/194	●	●	●
PP-MD	BL	PP-MD	BL	10	685	4.8	0.98	0.2	5/100	41/212	●	●	●

Mold to width available in: 38 mm (1.5 in), 50 mm (1.97 in), 100 mm (3.94 in), 200 mm (7.87 in)

■ BK (Black), ■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 4.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1-21 NTP | 21 % Opening | Nub top (round studs)

Large open area (21 %) for excellent air circulation and drainage | 4% contact area (Largest opening:  $\varnothing = 3.8$  mm/0.15 in) | Nub top surface for good release of wet and sticky products | Version available without round studs at the side (25 mm indent)

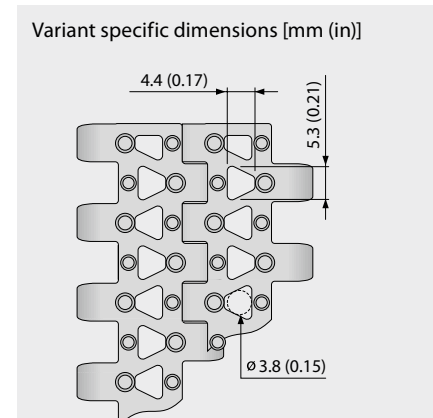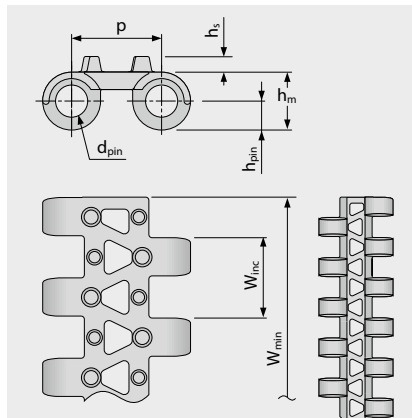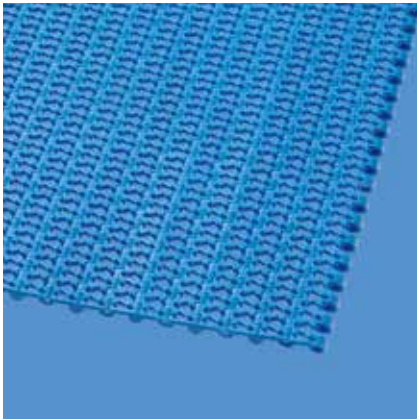


### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	14.0	5.0	9.0	4.5	2.5	25.0	12.5	±0.2	–	11.0	25.0	38.0	12.5
inch	0.55	0.2	0.35	0.18	0.1	0.98	0.49	±0.2	–	0.43	0.98	1.5	0.49

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	BL	PE	UC	3	206	4.6	0.94	-0.1	-70/65	-94/149	●	●	●
POM	BL	PBT	BL	10	685	6.6	1.35	0.0	-45/90	-49/194	●	●	●
PP	WT	PP	WT	5	343	4.2	0.86	0.25	5/100	41/212	●	●	●

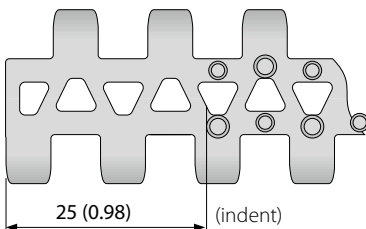

Also available with  
molded indent  
25 mm (0.98 in)

Mold to width available in: 200 mm (7.87 in)

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 4.1 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 14 mm (0.55 in)

## S4.1 SPR | Sprockets

Wide sprocket teeth ensure superior sprocket engagement and load transmission

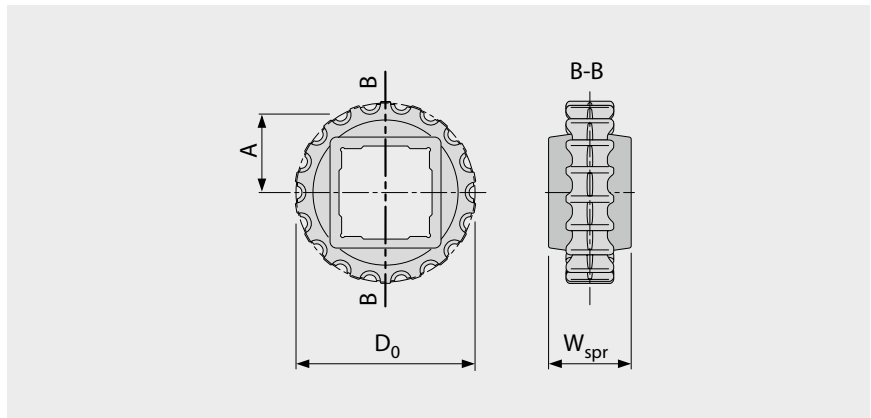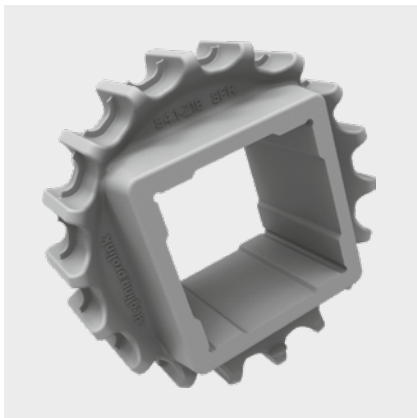

### Main dimensions

Sprocket size (Number of teeth)		Z10	Z12	Z14	Z16	Z18	Z19	Z26	Z35
W <sub>spr</sub>	mm	24.0	24.0	24.0	30.0	38.0	38.0	38.0	38.0
	inch	0.94	0.94	0.94	1.18	1.50	1.50	1.50	1.50
D <sub>0</sub>	mm	47.1	56.1	65.3	74.3	83.4	88.0	119.8	160.4
	inch	1.85	2.21	2.57	2.93	3.28	3.46	4.72	6.31
A <sub>max</sub>	mm	19.0	23.6	28.2	32.7	37.2	39.5	55.4	75.7
	inch	0.75	0.93	1.11	1.29	1.46	1.56	2.18	2.98
A <sub>min</sub>	mm	18.1	22.8	27.5	32.0	36.6	39.0	55.0	75.4
	inch	0.71	0.90	1.08	1.26	1.44	1.53	2.17	2.97

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

20	mm	● / ■							
25	mm		● / ■	■	●	● / ■	■		●
30	mm								●
40	mm					■	■	■	■
60	mm							■	■
0.75	inch	●	●					●	
1	inch		● / ■	■		● / ■	■		●
1.25	inch					●			●
1.5	inch					■	■	■	■
2.5	inch							□	■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 4.1 | PROSNAP

Straight running belt | Pitch 14 mm (0.55 in)

siegling prolink  
modular belts



## S4.1-0 FLT PSP | ProSnap

Quick-Release for easy, quick and toolless opening and closing of the belt | One pin solution for entire belt width

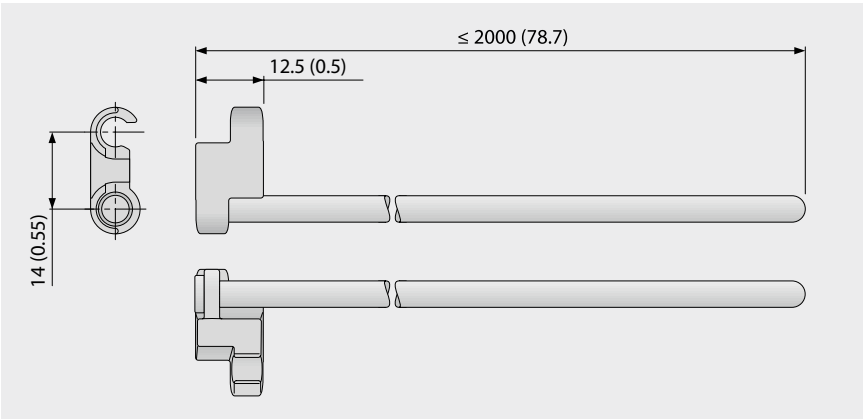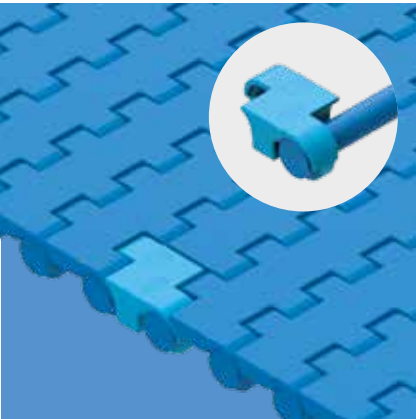

### Basic data

Module		Pin	
Material	Color	Material	Length [mm (in)]
POM	LB	PBT	≤ 2000 (79)
Mold to order			
POM-MD	BL	PBT	≤ 2000 (79)

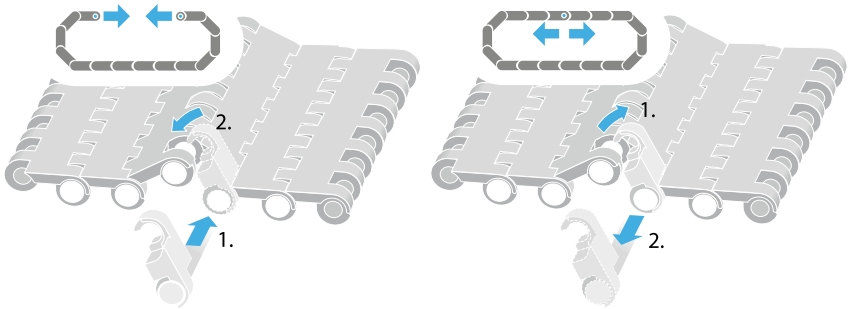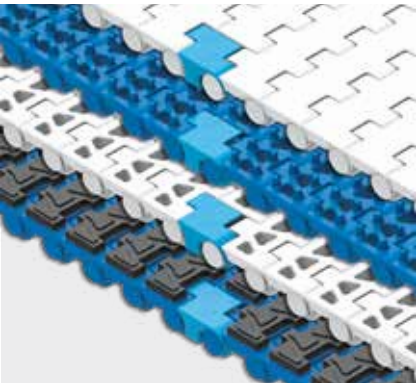

■ BL (Blue), ■ LB (Light blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.





# SERIES 4.1 | PROFILES

Straight running belt | Pitch 14 mm (0.55 in)

**siegling prolink**  
modular belts

## S4.1 FLT/NCL PMU


No cling surface to improve release of wet and sticky products and Flat top surface for dry products

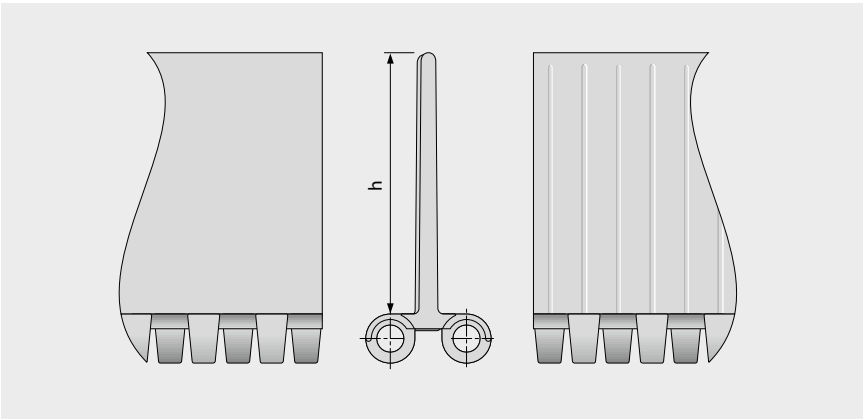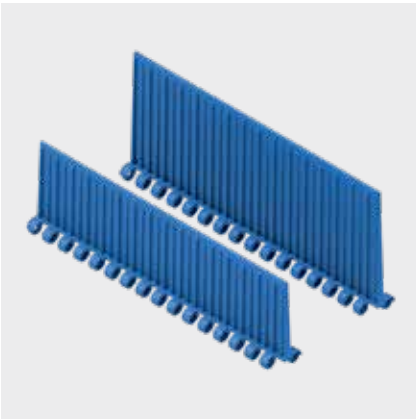


### Basic data

Material	Color	Height (h)	
		51 mm 2 inch	76 mm 3 inch
PE	BL	●	mold to order
PE	WT	●	mold to order
POM	BL	●	●
POM	WT	●	●
PP	BL	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

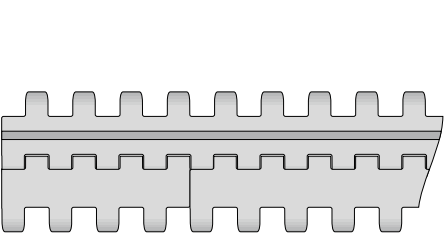

Standard configuration S4.1-0 FLT/NCL PMU

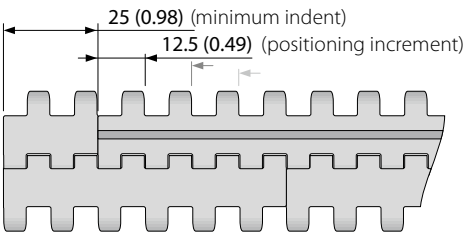

Indent configuration S4.1-0 FLT/NCL PMU

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 5**

Side flexing and spiral belts  
Pitch 25 mm (0.98 in)

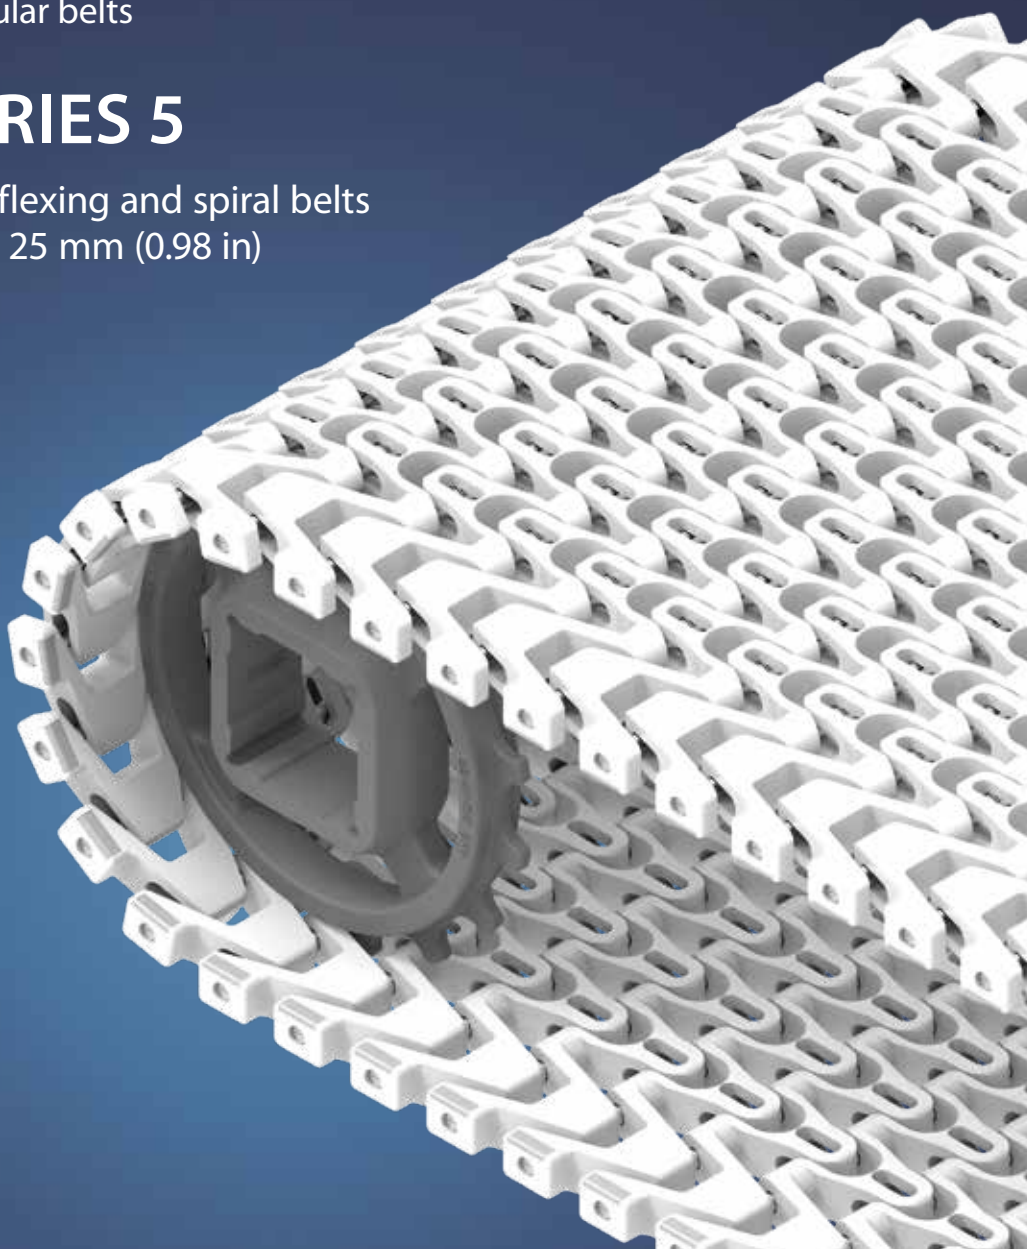


# SERIES 5 | OVERVIEW

**siegling prolink**  
modular belts

Side flexing and spiral belts | Pitch 25 mm (0.98 in)

Belts for light to medium-duty food and non-food applications

Side view scale 1:1

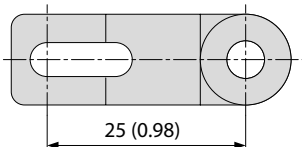


## Design characteristics

- Suitable for both straight and radius conveying
- Up to 45 % open area for excellent air circulation and drainage
- Stainless steel hinge pins for high load capacity, lateral stiffness, fewer belt supports and minimum belt lifting in curves
- No potential belt edge catch points due to safe fixing of hinge pins

## Basic data

Pitch	25 mm (0.98)
Belt width min.	100 mm (3.9 in), 175 mm (6.9 in) for S5 ST
Width increments	25 mm (0.98)
Hinge pins	5 mm (0.2 in) made of stainless steel

Available surface pattern and opening area

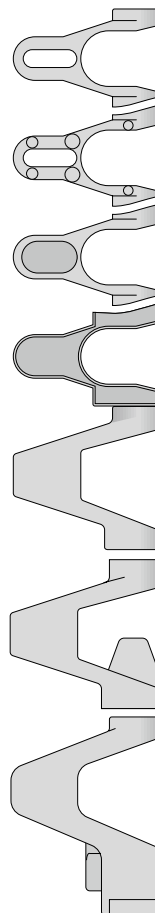

### S5-45 GRT

Open (45 %), lattice-shaped surface

### S5-45 NTP

Open (45 %), lattice-shaped surface with nub tops

### S5-39 FRT1

Open (39 %) surface with friction top


### S5-33 FRT2

Open (33 %) surface with friction top, flat

### Reinforced belts

### Guided belts

### Reversed guided belts

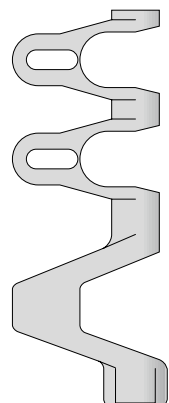


## Sprockets

in different sizes with round or square bore



## Profiles

in different heights and designs for inclines

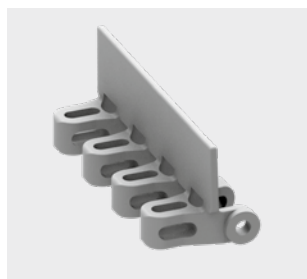

## Side guards

in different heights for retention of bulk products



## Ball-bearing modules

to minimize friction forces at the belt edge






# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 GRT | 45 % Opening | Grid top

Open area (45 %) for excellent air circulation and drainage | 42 % contact area (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Lattice shaped surface | Collapse factor ( $C_c$ ) = 2.0

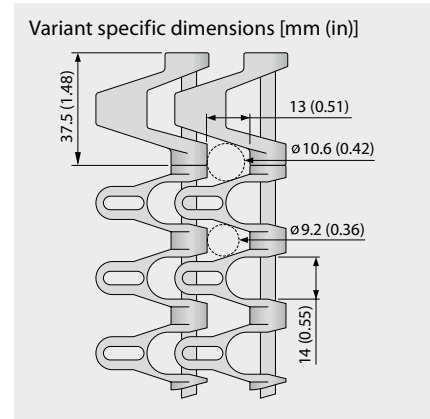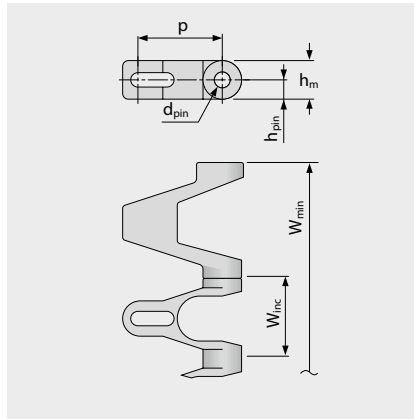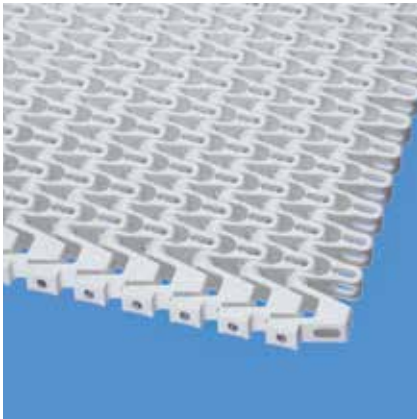

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	100.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	3.94	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT/DB	SS	10	685	NR	NR	11.0	2.25	0.0	-70/65	-94/149	●	●	●
PP	WT/DB/BL	SS	18	1233	1000	225	10.0	2.05	0.0	5/100	41/212	●	●	●
POM-CR	WT/DB/BL	SS	25	1713	1800	405	13.0	2.66	0.0	-45/90	-49/194	●	●	●

### Mold to order belts

PA*	BL	SS	20	1370	1440	324	12.8	2.62	0.0	-40/120	-40/248	●	●	●
-----	----	----	----	------	------	-----	------	------	-----	---------	---------	---	---	---

NR = not recommended

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), ■ DB (Dark blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 NTP | 45 % Opening | Nub top (round studs)

Open area (45 %) for excellent air circulation and drainage | Lattice shaped surface with 3.0 mm (0.12 in) high round studs  
and 8 % contact area (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Side modules without NTP-surface | Collapse factor ( $C_c$ ) = 2.0

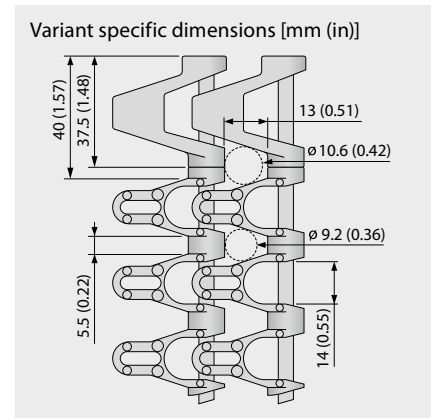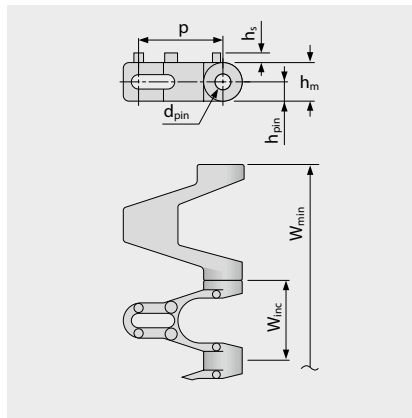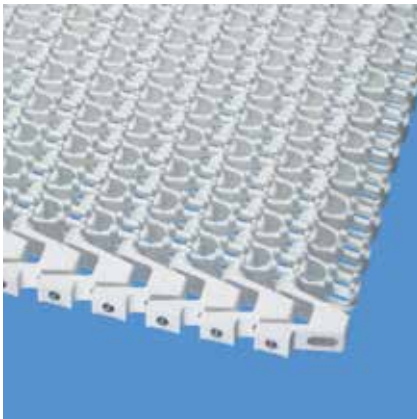

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.0	100.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.12	3.94	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	18	1233	1000	225	10.1	2.07	0.0	5/100	41/212	●	●	
POM-CR	WT	SS	25	1713	1800	405	13.1	2.68	0.0	-45/90	-49/194	●	●	

Mold to order belts														
PE	WT	SS	10	685	NR	NR	11.2	2.29	0.0	-70/65	-94/149	●	●	●

NR = not recommended

□ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-39 FRT1 | 39% Opening | Friction top (Design 1)

Excellent air circulation and drainage | Integrated friction pads (raised) increase surface friction and provide gentle grip | 8% contact area (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Side modules without FRT-surface | Collapse factor ( $C_c$ ) = 2.0

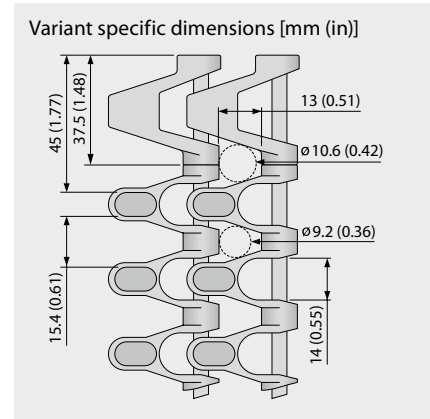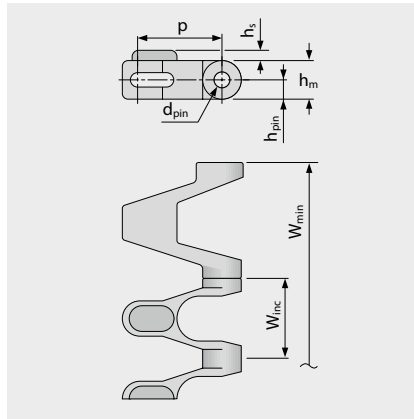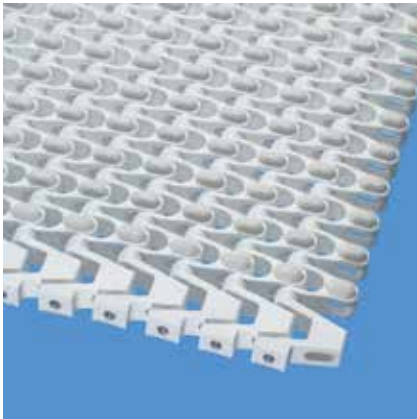

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.2	100.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.13	3.94	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation		Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color		[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]		[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	R4	BG		18	1233	1000	225	10.2	2.09	0.0		5/100	41/212	●	●	●
POM-CR-PP	WT	SS	R4	BG		18	1233	1800	405	10.4	2.13	0.0		5/90	41/194	●	●	●

■ BG (Beige), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS








# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 GRT G | 45 % Opening | Grid top · guided

Excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Lattice shaped surface and Hold Down Tabs | Allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 2.0

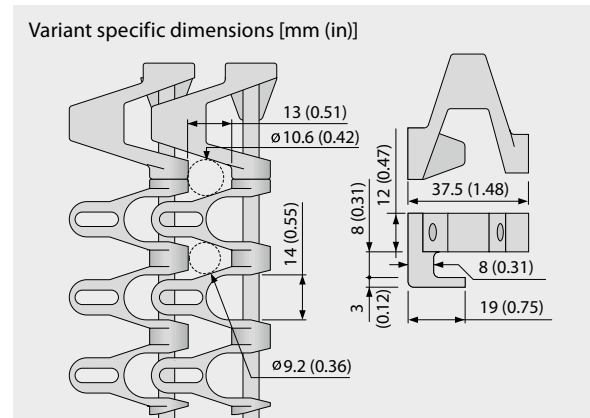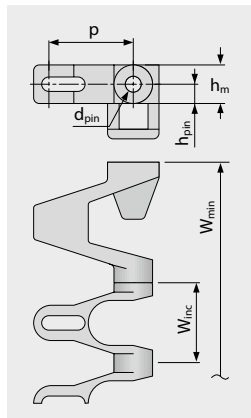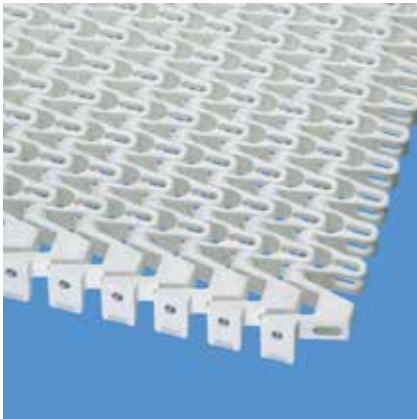

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	100.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	3.94	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	WT	SS	25	1713	1800	405	13.0	2.66	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	SS	25	1713	1800	405	13.0	2.66	0.0	-45/90	-49/194	●	●	●
POM-CR	DB	SS	25	1713	1800	405	13.0	2.66	0.0	-45/90	-49/194	●	●	●
PP	WT	SS	18	1233	1000	225	10.0	2.05	0.0	5/100	41/212	●	●	●

Mold to order belts													
PE	WT	SS	10	685	NR	NR	11.0	2.25	0.0	-70/65	-94/149	●	●
PA*	BL	SS	20	1370	1440	324	12.8	2.62	0.0	-40/120	-40/248	●	●

NR = not recommended

\* Values valid for dry applications (RH <50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), ■ DB (Dark blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 NTP G | 45 % Opening | Nub top (round studs) · guided

Open area (45 %) for excellent air circulation and drainage | Lattice shaped surface with 3.0 mm (0.12 in) high round studs and 8 % contact area (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Side modules without NTP-surface | Allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 2.0

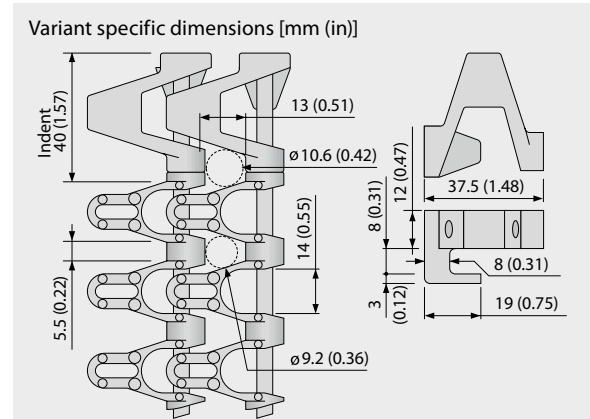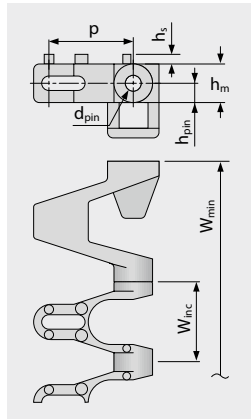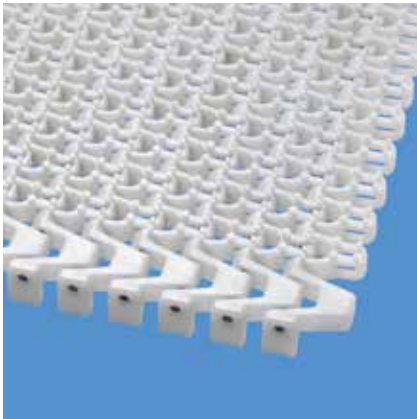

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.0	100.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.12	3.94	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	WT	SS	25	1713	1800	405	13.2	2.70	0.0	-45/90	-49/194	●	●	●
PP	WT	SS	18	1233	1000	225	10.2	2.09	0.0	5/100	41/212	●	●	●

□ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-39 FRT1 G | 39% Opening | Friction top (Design 1) · guided

Excellent air circulation and drainage | Integrated friction pads (raised) increase surface friction and provide gentle grip (Largest opening:  $\varnothing = 10.6$  mm/0.42 in) | Allows utilization of the entire belt width | Side modules without FRT-surface | Collapse factor ( $C_c$ ) = 2.0

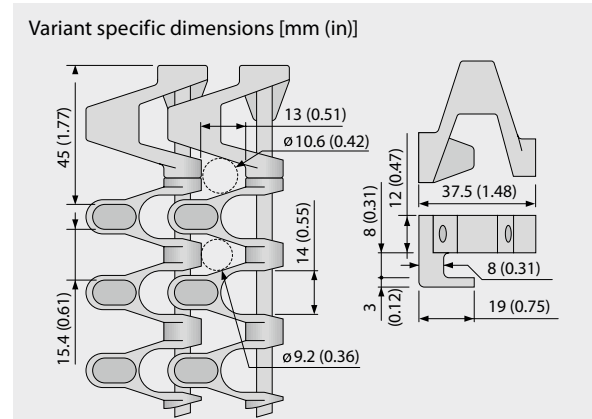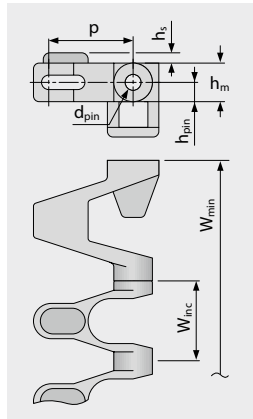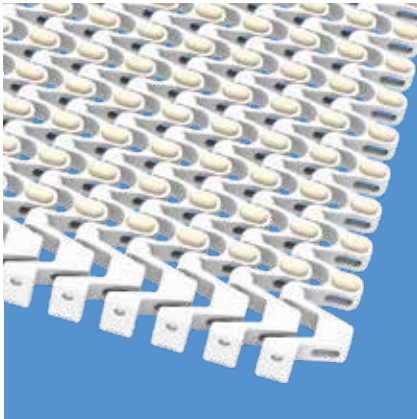

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.2	100.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.13	3.94	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation		Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color		[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]		[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	R4	BG		18	1233	1000	225	10.2	2.09	0.0		5/100	41/212			
POM-CR-PP	WT	SS	R4	BG		18	1233	1800	405	10.5	2.15	0.0		5/90	41/194			

■ BG (Beige), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 5 | BELT TYPES

**siebling prolink**  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-33 FRT2 G | 33 % Opening | Friction top (Design 2) · guided

Open area (33 % for full FRT2 surface area) for excellent air circulation and drainage | 47 % contact area (Largest opening:  $\varnothing = 8.6 \text{ mm}/0.34 \text{ in}$ ) | Integrated friction pads (flat) provide gentle grip | Allows utilization of the entire belt width | Side modules without FRT-surface | Collapse factor ( $C_c$ ) = 2.0

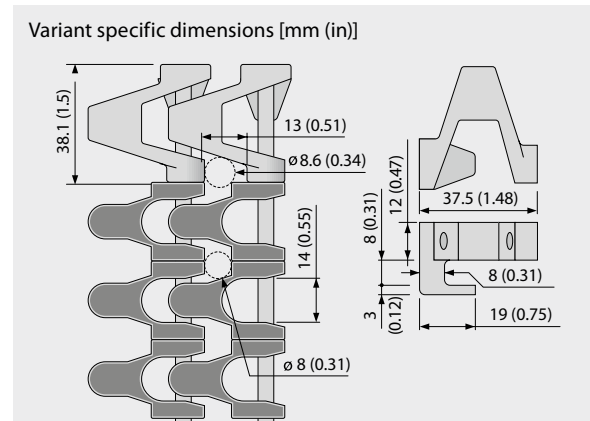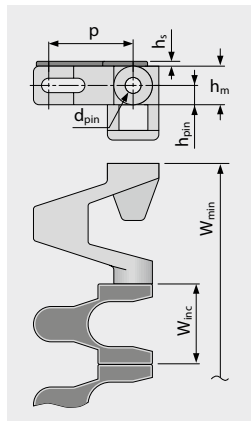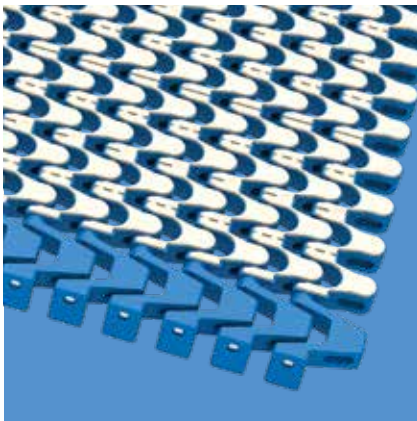

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	1.5	100.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.06	3.94	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	R7	BG	18	1233	1000	225	11.4	2.33	0.0	5/100	41/212	●	●	
PP	BL	SS	R7	BG	18	1233	1000	225	11.4	2.33	0.0	5/100	41/212	●	●	
PP	BL	SS	R7	BK	18	1233	1000	225	11.4	2.33	0.0	5/100	41/212	●	●	
POM-CR-PP	WT	SS	R7	BG	18	1233	1800	405	11.7	2.40	0.0	5/90	41/194	●	●	
POM-CR-PP	BL	SS	R7	BG	18	1233	1800	405	11.7	2.40	0.0	5/90	41/194	●	●	
POM-CR-PP	BL	SS	R7	BK	18	1233	1800	405	11.7	2.40	0.0	5/90	41/194	●	●	

■ BG (Beige), ■ BK (Black), ■ BL (Blue), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 GRT RG | 45 % Opening | Grid top · reverse guided

Excellent air circulation and drainage | Lattice shaped surface and reversed Hold Down Tabs | 42 % contact area (Largest opening:  $\varnothing = 10.5$  mm/0.41 in) | Smooth surface | Allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 2.0

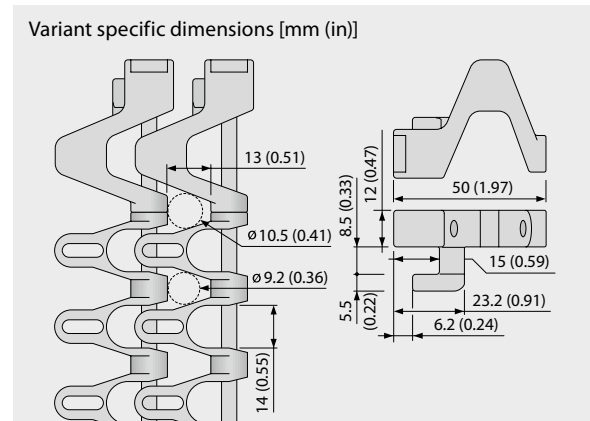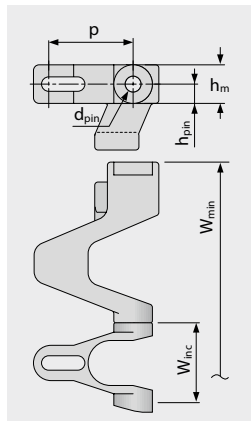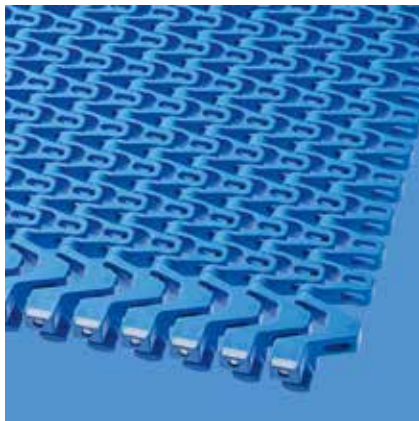

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	125.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	4.92	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	SS	25	1713	2100	472	13.0	2.66	0.0	-45/90	-49/194	●	●	●
Mold to order belts														
PE	WT	SS	10	685	NR	NR	11.0	2.25	0.0	-70/65	-94/149	●	●	●
PP	WT	SS	18	1233	1200	270	10.0	2.05	0.0	5/100	41/212	●	●	●

NR = not recommended

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request










# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-39 FRT1 RG | 39% Opening | Friction top (Design 1) · reverse guided

Excellent air circulation and drainage | Integrated friction pads (raised) increase surface friction and provide gentle grip  
(Largest opening:  $\varnothing = 10.5$  mm/0.41 in) | Allows utilization of the entire belt width | Side modules without FRT-surface |  
Collapse factor ( $C_c$ ) = 2.0

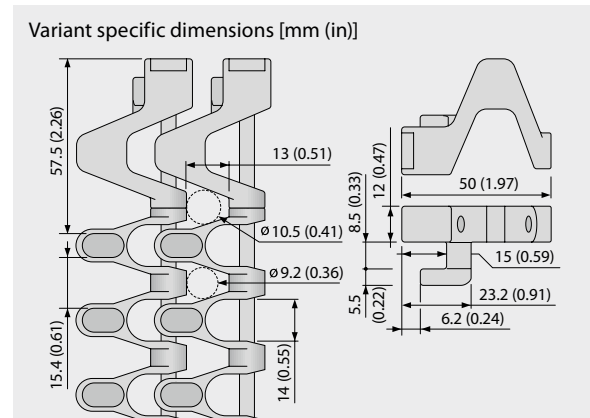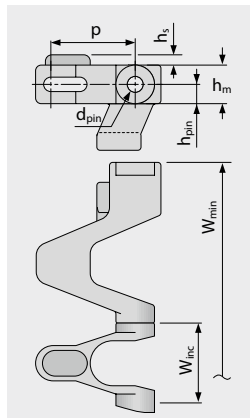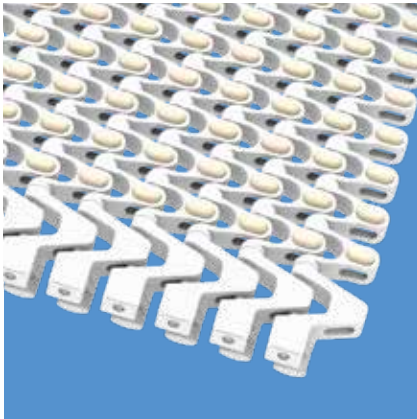

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.2	125.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.13	4.92	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR-PP	WT	SS	R4	BG	18	1233	2100	472	10.2	2.09	0.0	5/90	-49/194			

■ BG (Beige), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS






# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-33 FRT2 RG | 33 % Opening | Friction top (Design 2) · reverse guided

Open area (33 % for full FRT2 surface area) for excellent air circulation and drainage | 47 % contact area (Largest opening:  $\varnothing = 8.6 \text{ mm}/0.34 \text{ in}$ ) | Integrated friction pads (flat) provide gentle grip | Allows utilization of the entire belt width | Side modules without FRT-surface | Collapse factor ( $C_c$ ) = 2.0

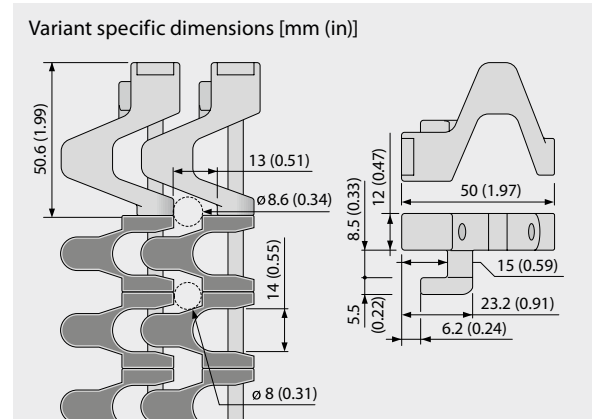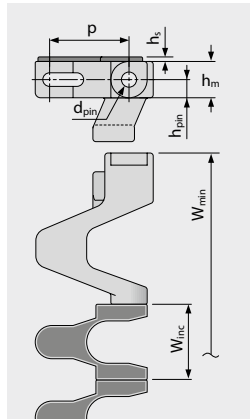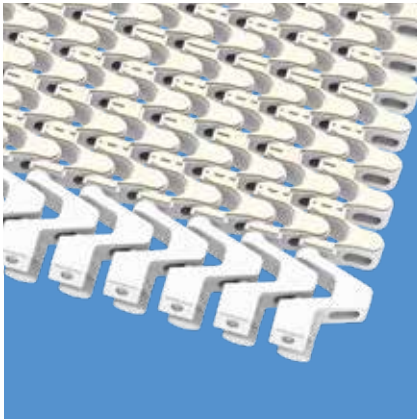

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	1.5	125.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.06	4.92	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR-PP	BL	SS	R7	BG	18	1233	2100	472	11.4	2.33	0.0	5/90	-49/194	●	●	
POM-CR-PP	WT	SS	R7	BG	18	1233	2100	472	11.4	2.33	0.0	5/90	-49/194	●	●	
POM-CR-PP	BL	SS	R7	BK	18	1233	2100	472	11.4	2.33	0.0	5/90	-49/194	●	●	

■ BG (Beige), ■ BK (Black), ■ BL (Blue), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 GRT ST | 45 % Opening | Grid top · strong

Excellent air circulation and drainage | Lattice shaped surface (Largest opening:  $\varnothing = 13.0$  mm/0.51 in) | Version with reinforced brick-laid side modules (75 mm/2.9 in and 100 mm/3.9 in) increases belt pull capacity | Collapse factor ( $C_c$ ) = 2.0

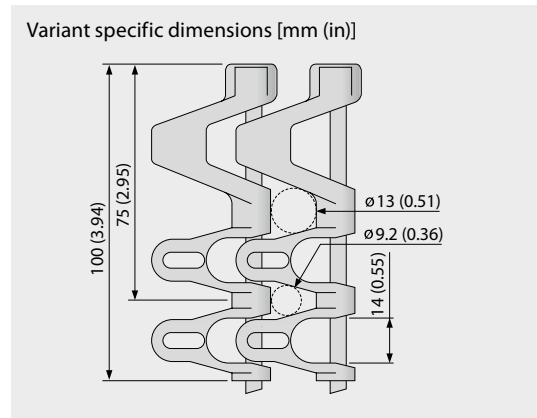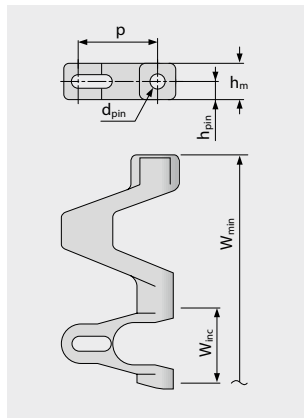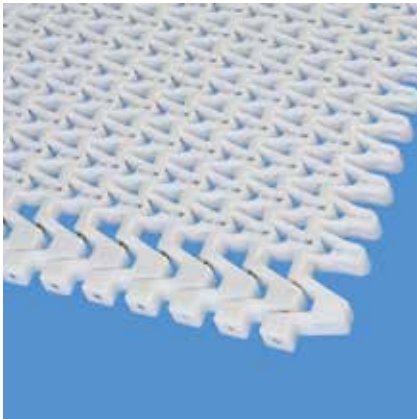

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	175.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	6.89	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	18	1233	1200	270	10.2	2.09	0.0	5/100	41/212	●	●	●
PP	DB	SS	18	1233	1200	270	10.2	2.09	0.0	5/100	41/212	●	●	●
PP	BL	SS	18	1233	1200	270	10.2	2.09	0.0	5/100	41/212	●	●	●
POM-CR	WT	SS	25	1713	2100	472	13.2	2.7	0.0	-45/90	-49/194	●	●	●
POM-CR	DB	SS	25	1713	2100	472	13.2	2.7	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	SS	25	1713	2100	472	13.2	2.7	0.0	-45/90	-49/194	●	●	●
Mold to order belts														
PE	WT	SS	10	685	NR	NR	11.1	2.27	0.0	-70/65	-94/149	●	●	●
PA*	BL	SS	20	1370	1680	378	13.0	2.66	0.0	-40/120	-40/248	●	●	●

NR = not recommended

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), ■ DB (Dark blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 NTP ST | 45 % Opening | Nub top (round studs) · strong

Excellent air circulation and drainage | With round studs for increased grip (8% contact area, largest opening:  $\varnothing = 13.0$  mm/ 0.51 in) | Version with reinforced brick-laid side modules increases belt pull capacity | Side modules only available without NTP-pattern | Collapse factor ( $C_c$ ) = 2.0

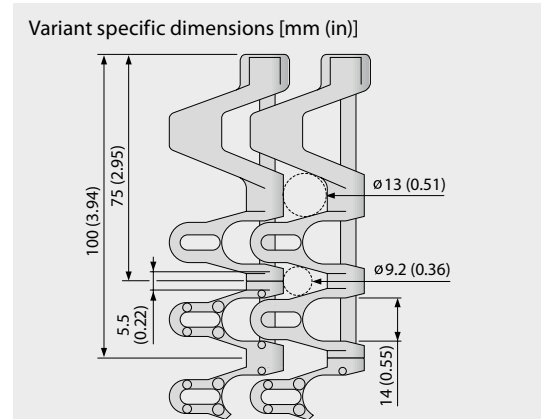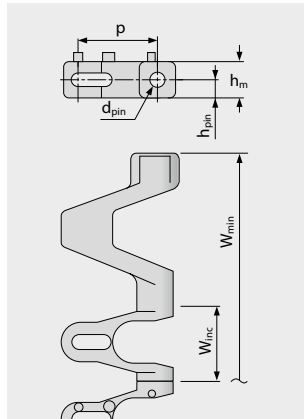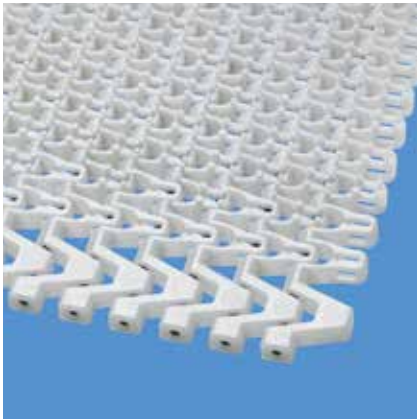

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.0	175.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.12	6.89	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	18	1233	1200	270	10.2	2.09	0.0	5/100	41/212	●	●	●

□ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-39 FRT1 ST | 39% Opening | Friction top (Design 1) · strong

Excellent air circulation and drainage | Integrated friction pads (raised) increase surface friction and provide gentle grip (Largest opening:  $\varnothing = 13.0$  mm/0.51 in) | Reinforced side modules increase belt pull capacity | Side modules without FRT-surface | Collapse factor ( $C_c$ ) = 2.0

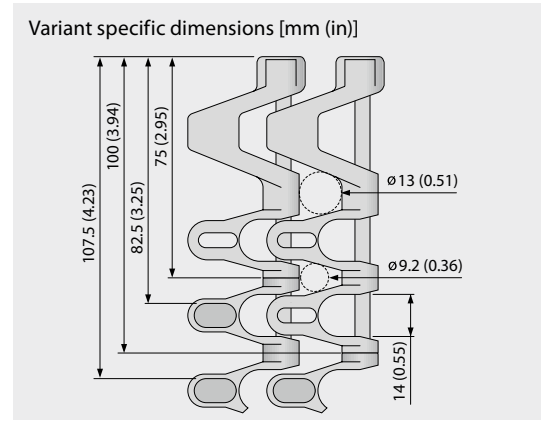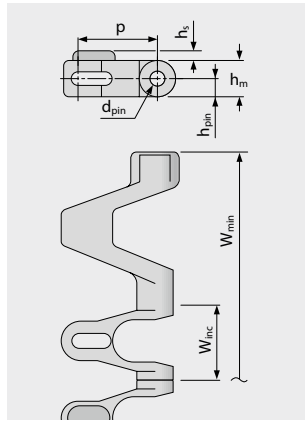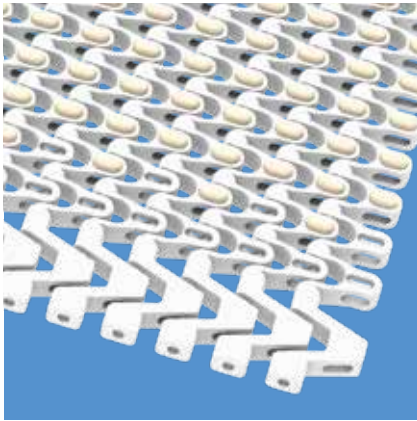

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	3.2	175.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.13	6.89	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color		[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	R4	BG		18	1233	1200	270	10.2	2.09	0.0	5/100	41/212			
POM-CR-PP	WT	SS	R4	BG		18	1233	2100	472	10.5	2.15	0.0	5/90	41/194			

■ BG (Beige), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | BELT TYPES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-33 FRT2 ST | 33 % Opening | Friction top (Design 2) · strong

Open area (33 % for full FRT2 surface area) for excellent air circulation and drainage | 47 % contact area (Largest opening:  $\varnothing = 13.0$  mm/0.51 in) | Lattice shaped surface | Version with reinforced brick-laid side modules increases belt pull capacity | Collapse factor ( $C_c$ ) = 2.0

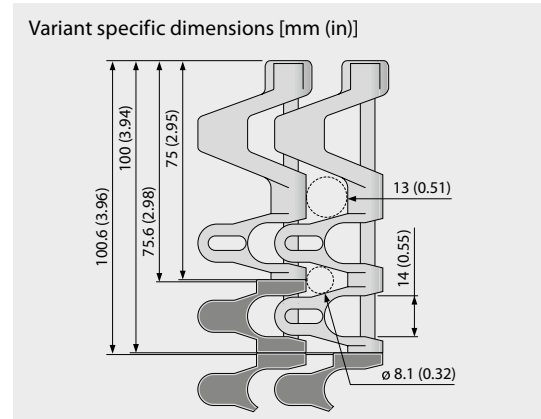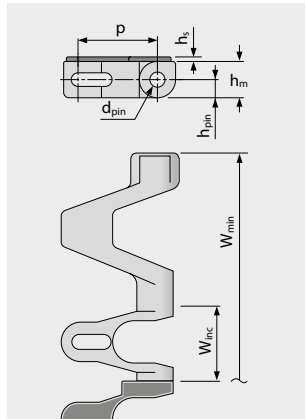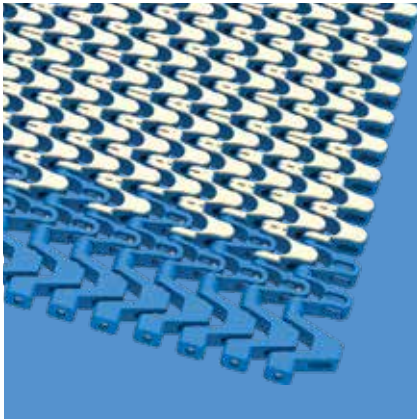

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	1.5	175.0	25.0	±0.3	2 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.06	6.89	0.98	±0.3	2 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	BL	SS	R7	BG	18	1233	1200	270	11.4	2.33	0.0	5/100	41/212	●	●	
PP	WT	SS	R7	BG	18	1233	1200	270	11.4	2.33	0.0	5/100	41/212	●	●	
PP	BL	SS	R7	BK	18	1233	1200	270	11.4	2.33	0.0	5/100	41/212	●	●	
POM-CR-PP	BL	SS	R7	BG	18	1233	2100	472	12.0	2.46	0.0	5/90	41/194	●	●	
POM-CR-PP	WT	SS	R7	BG	18	1233	2100	472	12.0	2.46	0.0	5/90	41/194	●	●	
POM-CR-PP	BL	SS	R7	BK	18	1233	2100	472	12.0	2.46	0.0	5/90	41/194	●	●	

Comment: ST types combinable with standard center curve modules, NTP, FRT.

ST types not combinable with Guided (G), Side Guards (SG) or Bearing Tab (BT). Please contact us should you require small curve radii.

■ BG (Beige), ■ BK (Black), ■ BL (Blue), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# S5 COMBO | BELT TYPES

siebling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in) |  $C_c = 1.45$

## S5 ST/S11-45 GRT CW | 45 % Opening | Grid top | Clockwise or right hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Excellent air circulation and drainage | 42 % contact area (Largest opening:  $\varnothing = 13 \text{ mm}/0.51 \text{ in}$ ) | Lattice shaped surface | SS pins for high stiffness | Collapse factor ( $C_c$ ) = 1.45

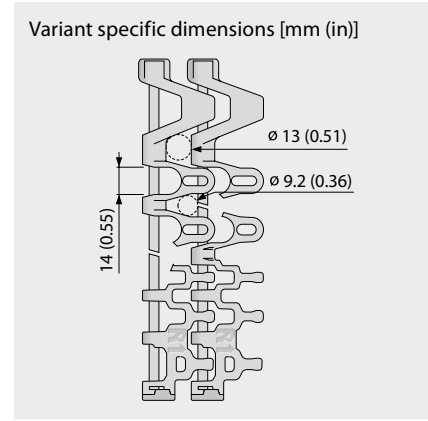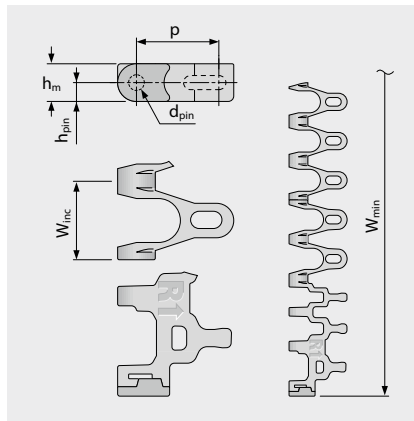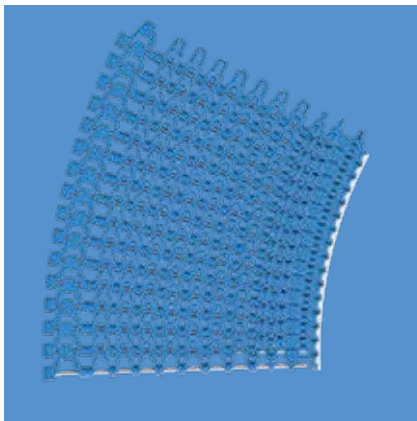

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	175.0	25.0	$\pm 0.3$	$1.45 \times W_B$	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	6.89	0.98	$\pm 0.3$	$1.45 \times W_B$	0.98	1.97	2.95	0.98

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	18	1233	1200	270	10.2	2.09	0.2	5/100	41/212	●	●	●
PP	BL	SS	18	1233	1200	270	10.2	2.09	0.2	5/100	41/212	●	●	●
POM-CR	WT	SS	25	1713	2100	472	13.2	2.70	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	SS	25	1713	2100	472	13.2	2.70	0.0	-45/90	-49/194	●	●	●
PA*	BL	SS	20	1370	1680	378	13.0	2.66	0.6	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 5 | BELT TYPES

siegling prolink  
modular belts


Side flexing and spiral belt | Pitch 25 mm (0.98 in) |  $C_c = 2.0$

## S5-45 GRT BT / S5-45 GRT BT ASM | 45 % Opening | Bearing Tab Module\*


Ball-bearing support to minimize friction force at the belt edge (high speed, reduce dust, save energy) |

Collapse factor ( $C_c$ ) = 2.0

\* S5-45 GRT BT modules will be delivered without ball-bearings. S5-45 GRT BT ASM will be delivered with ball-bearings.

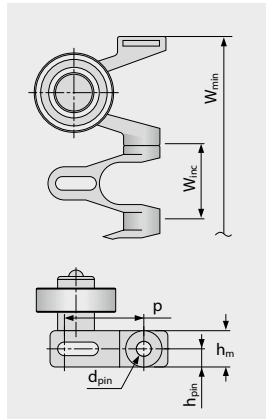

Variant specific dimensions [mm (in)]

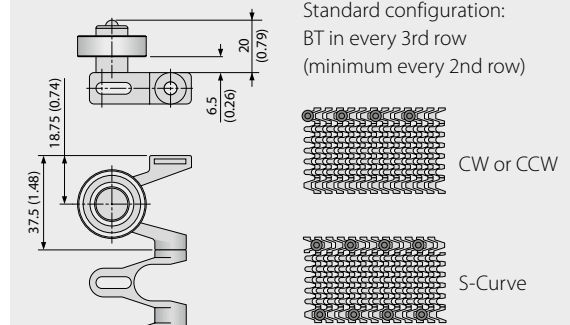

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	100.0	25.0	±0.3	2 x W <sub>B</sub>	50.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	3.94	0.98	±0.3	2 x W <sub>B</sub>	1.97	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight**		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	DB	SS	25	1713	1800	405	13.0	2.66	0.0	-45/90	-49/194	●	●	●

\*\* Belt weight: Please calculate 18 g extra for each ball-bearing

### Additional information

Compatible belt types: S5-45 GRT / NTP / (FRT1 / FRT2 in PP)

Friction coefficient in curve: 0.04

Standard belt configuration: BT in every 3rd row (min. every 2nd row). CCW and CW → BT on the outside of the curve. S-curve → BT on both sides.  
Reduced spacing will improve smooth belt running behaviour

Smallest sprocket size: Depends on belt configuration (BT every 2nd row → min. sprocket Z11 – only with RD hub)

■ DB (Dark blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Belt without ball-bearing: Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 5 | SPROCKETS

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in)

## S5 SPR | Sprockets

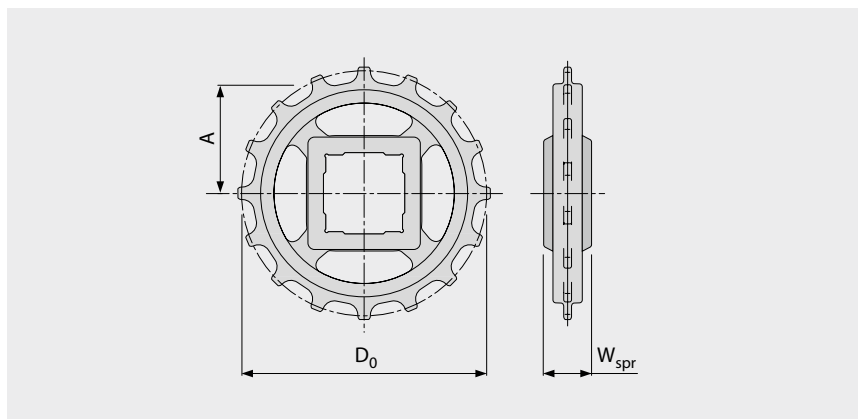

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z9	Z11	Z12	Z16	Z18	Z20
W <sub>spr</sub>	mm	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	inch	0.94	0.94	0.94	0.94	0.94	0.94	0.94
D <sub>0</sub>	mm	49.6	72.6	88.0	95.8	127.2	142.8	158.5
	inch	1.95	2.86	3.46	3.77	5.01	5.62	6.24
A <sub>max</sub>	mm	18.8	30.3	38.0	41.9	57.6	65.4	73.3
	inch	0.74	1.19	1.50	1.65	2.27	2.57	2.89
A <sub>min</sub>	mm	16.3	28.5	36.5	40.5	56.5	64.4	72.4
	inch	0.64	1.12	1.44	1.59	2.22	2.54	2.85

**Shaft bores** (● = Round, ■ = Square; ○ or □ = mold to order; \* = not possible with S5 RG and G belts)

25	mm		● / ■*	○	● / ■	●	●	○
30	mm		● / ■*	○	●	●	●	●
40	mm			■*	● / ■	● / ■	● / ■	● / ■
0.75	inch	●*						
1	inch		● / □*	○	● / □	●	○	○
1.25	inch		○ / □*	○	●	●	○	●
1.5	inch			□*	● / ■	● / ■	■	● / ■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2

Sprocket installation see chapter 5.2



MOVEMENT SYSTEMS


# SERIES 5 | PROFILES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25 mm (0.98 in)

## S5-45 GRT PMC


Open version (45 %) base module for drainage

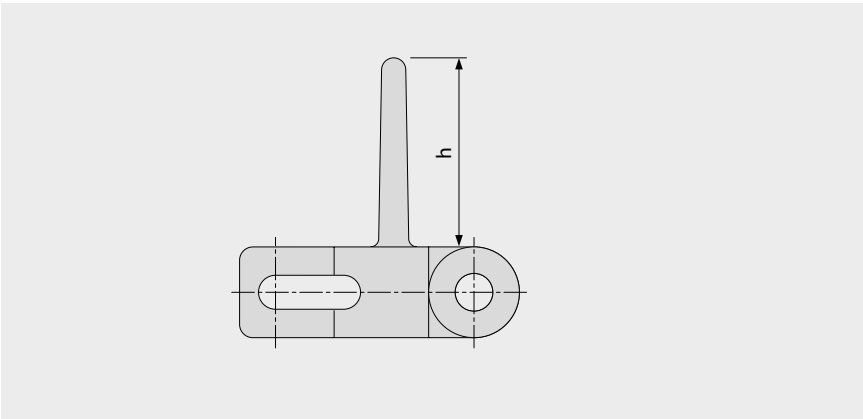

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
PE	WT	●	●
POM	BL	●	●
POM	DB	●	●
POM	UC	●	●
POM	WT	●	●
PP	DB	●	●
PP	WT	●	●

Molded width: 100 mm (3.9 in)

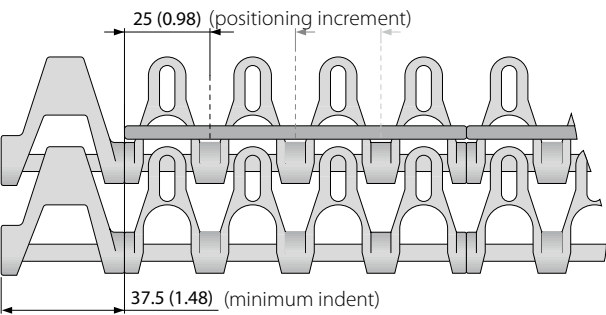

PMC also available  
for G, RG, ST types.

G = Indent 37.5 (1.48)  
RG = Indent 50 (1.97)  
ST = Indent 75 (2.95)

■ BL (Blue), ■ DB (Dark blue), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 5 | SIDE GUARDS

siebling prolink  
modular belts


Side flexing and spiral belt | Pitch 25 mm (0.98 in)

## S5 SG | Side guards

For retention of bulk products

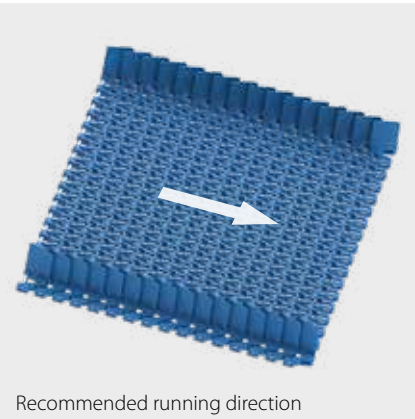


Recommended running direction

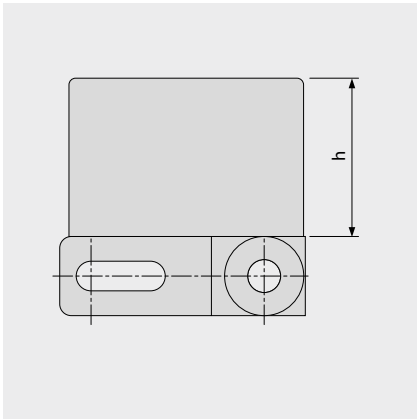

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
POM-CR	BL		●
POM-CR	WT	●	●

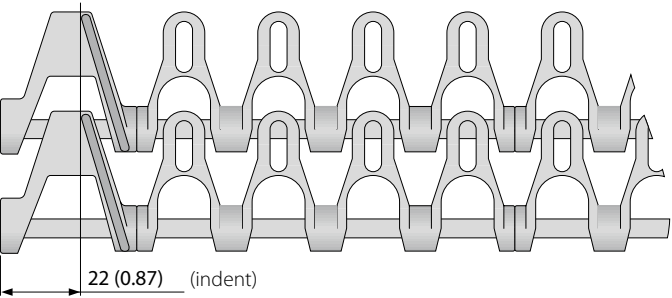

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS


# SERIES 5 | INSTALLATION NOTES

Side flexing and spiral belt | Pitch 25 mm (0.98 in)

## Preferred travel direction

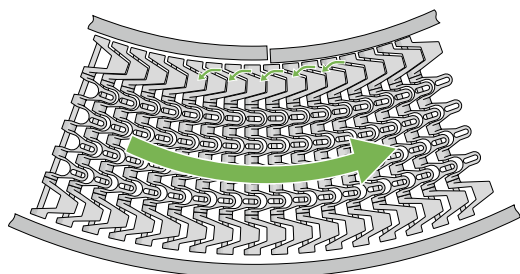


Curve conveyor



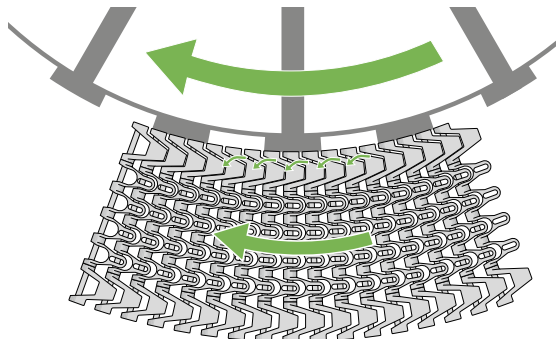


Cage driven spiral

## Curve direction S5 -> CW (ClockWise) and CCW (Counter ClockWise)


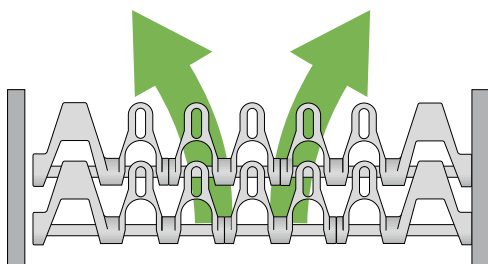


## Curve direction S5 ST/S11 Combo -> Belt CW Clockwise

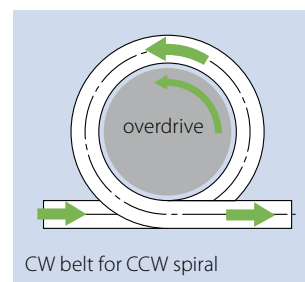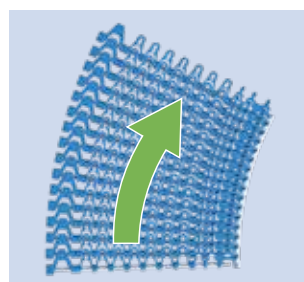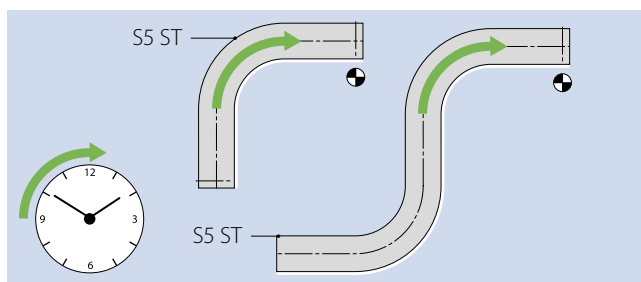

CW belt for CCW spiral

## Sprocket installation

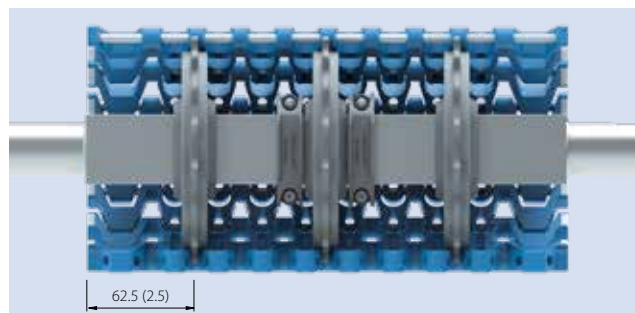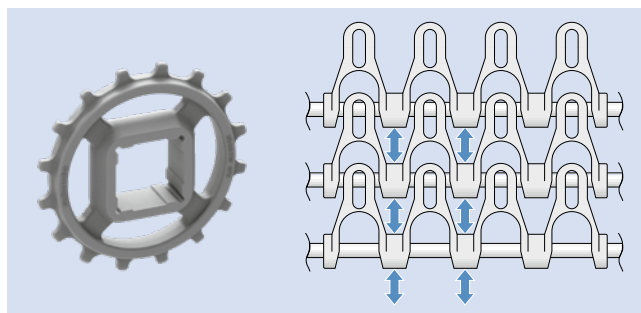


Further information in chapter 3 and 5

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 6.1**

Straight running belts  
Pitch 50 mm (1.97 in)

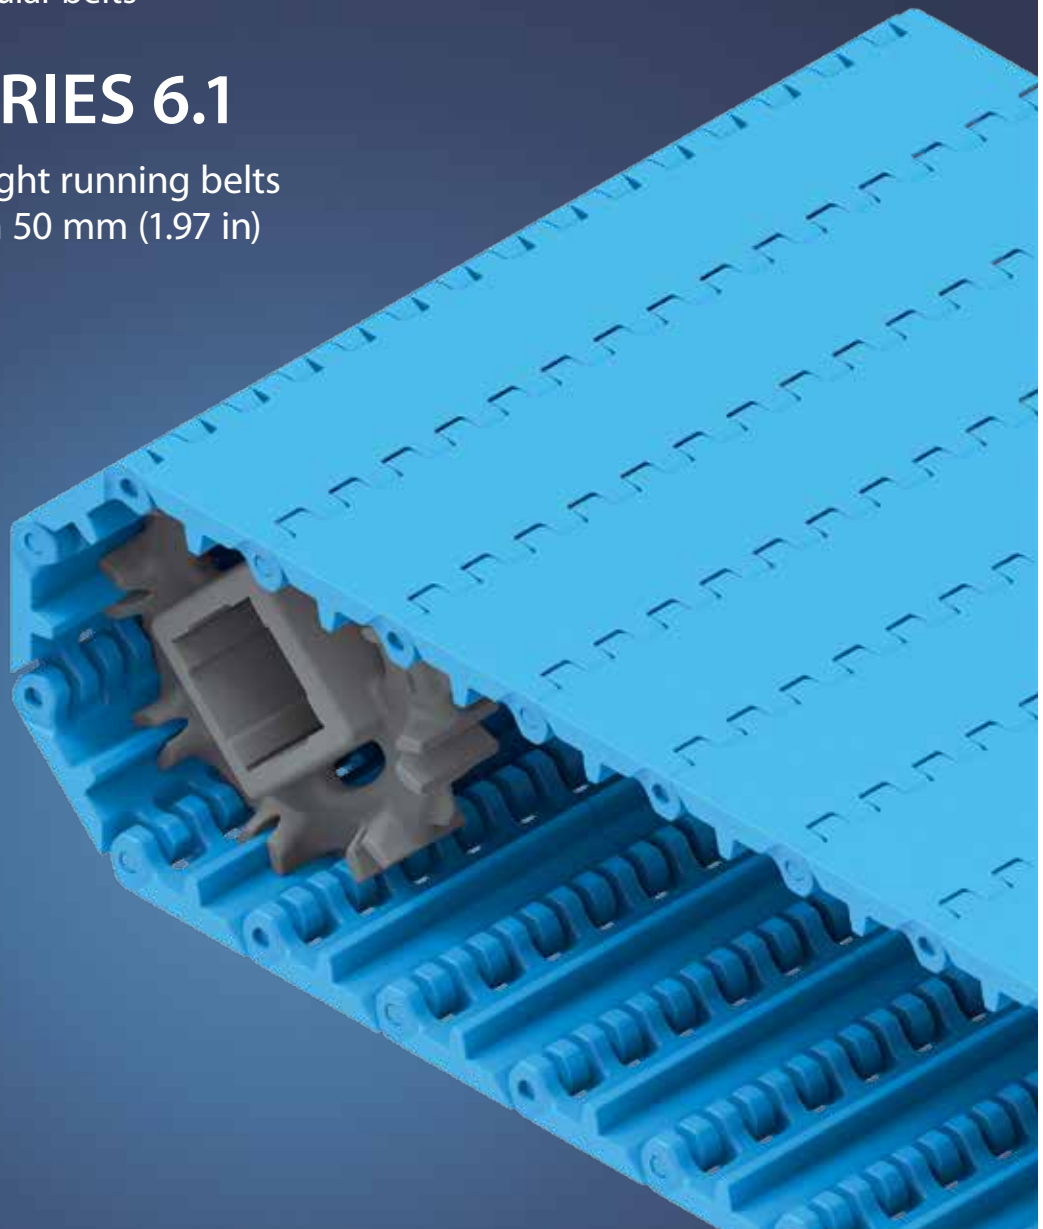


# SERIES 6.1 | OVERVIEW

**siebling prolink**  
modular belts

Straight running belts | Pitch 50 mm (1.97 in)

Belts for medium to heavy-duty, hygiene-critical applications

Side view scale 1:1

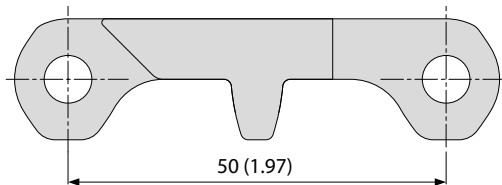


## Design characteristics

- Wide modules and eyelets for less soiling
- Hinges that open wide, wide channels on the underside and a continuous drive bar for an easy-to-clean design
- Robust design and smooth, cut-resistant surface (depending on material)
- Special sprocket design with enhanced tooth engagement for excellent force transmission

## Basic data

Pitch	50 mm (1.97 in)
Belt width min.	40 mm (1.57 in)
Width increments	20 mm (0.8 in)
Hinge pins	6 mm (0.24 in), made of plastic (PBT, PP, PE, POM-MD, PP-MD). One-piece up to a belt width of 1200 mm (47 in).

Available surface pattern and opening area

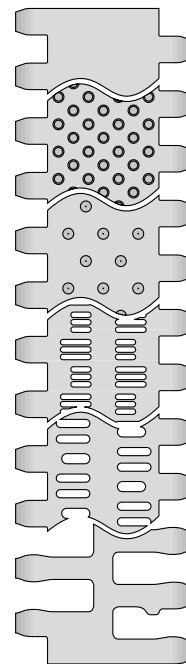

### S6.1-0 FLT

Closed, smooth surface

### S6.1-0 NTP

Closed surface and round studs

### S6.1-0 CTP

Closed surface and pointed studs

### S6.1-21 FLT

Open (21 %), smooth surface

### S6.1-23 FLT

Open (23 %), smooth surface

### S6.1-36 FLT

Open (36 %), smooth surface



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)


## Sprockets

in different sizes with round or square bore




## Profiles

in different heights and designs for inclines

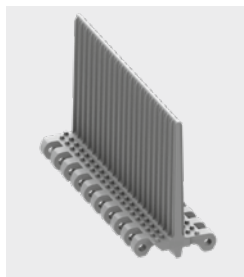

## Side guards

in different heights for retention of bulk products

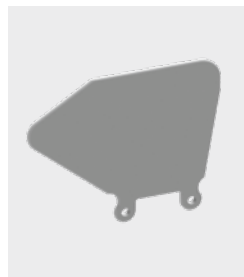

## Hold Down Tabs

Hold Down Tabs for additional guiding



## ProSnap

Quick-Release for easy opening and closing of the belt





# SERIES 6.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface | Easy-to-clean

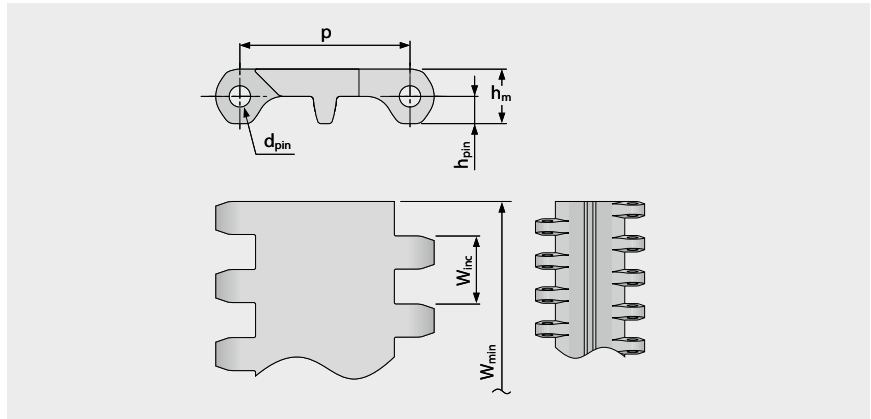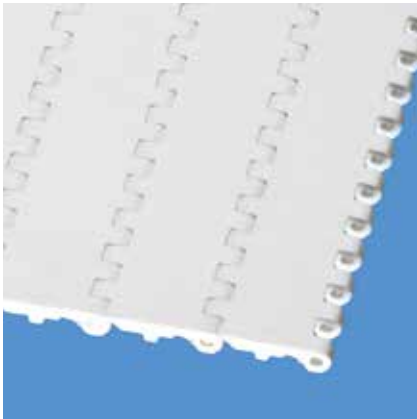

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	40.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	1.57	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT/LB	PE	WT/LB	13	891	9.4	1.93	-0.65	-70/65	-94/149	●	●	●
POM	WT/LB	PBT	UC/LB	30	2056	13.4	2.74	-0.65	-45/90	-49/194	●	●	●
POM-CR	WT/LB	PBT	UC/LB	30	2056	13.4	2.74	-0.65	-45/90	-49/194	●	●	●
PP	WT/LB	PP	WT/LB	18	1233	8.3	1.7	-0.0	5/100	41/212	●	●	●
PE-MD	BL	POM-MD	BL	13	891	9.8	2.01	-0.65	-70/65	-94/149	●	●	●
POM-MD	BL	POM-MD	BL	30	2056	13.7	2.81	-0.65	-45/90	-49/194	●	●	●
PP-MD	BL	PP-MD	BL	18	1233	9.0	1.84	-0.0	5/100	41/212	●	●	●

#### Mold to order belts

PA*	BL	PBT	UC	30	2056	12.9	2.64	-0.0	-40/120	-40/248	●	●	●
TPC1	LB	PBT	UC	13	891	11.6	2.38	-0.65	-25/80	-13/176	●	●	●
PLX	BL	PLX	BL	22	1507	11.6	2.38	-0.20	-45/120	-49/248	●	●	●

Mold to width available in: 100 mm (3.94 in), 140 mm (5.51 in), 200 mm (7.87 in), 220 mm (8.66 in), 400 mm (15.75 in)

\* Values valid for dry applications (RH <50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request







# SERIES 6.1 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-0 NTP | 0% Opening | Nub top (round studs)

Closed surface and round studs | 6% contact area | Nub top surface for good release of wet and sticky products | Easy-to-clean

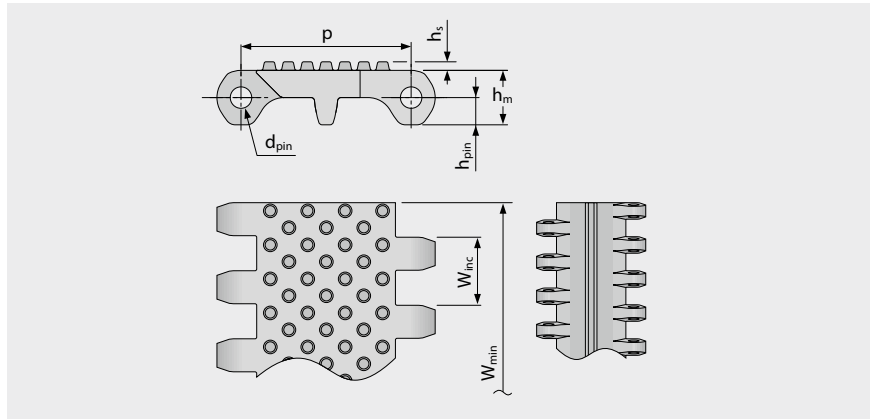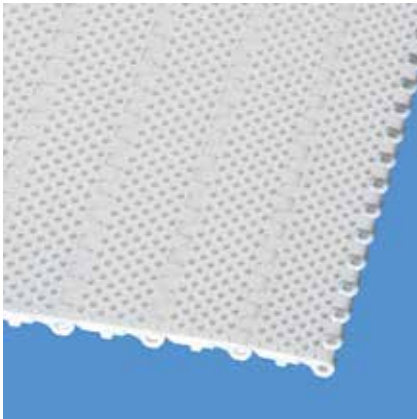

### Belt dimensions


	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	2.5	40.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.1	1.57	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	13	891	9.6	1.97	-0.65	-70/65	-94/149	●	●	●
PE	LB	PE	LB	13	891	9.6	1.97	-0.65	-70/65	-94/149	●	●	●
POM	LB	PBT	LB	30	2056	13.7	2.81	-0.65	-45/90	-49/194	●	●	●

### Mold to order belts

PP		PP		18	1233	8.4	1.72	0.0	5/100	41/212			
----	--	----	--	----	------	-----	------	-----	-------	--------	--	--	--

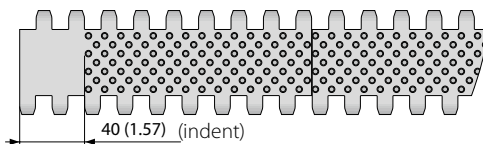

Also available with  
molded indent  
40 mm (1.57 in)

Mold to width available in: 100 mm (3.94 in),  
200 mm (7.87 in), 400 mm (15.75 in)

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 6.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-0 CTP | 0% Opening | Cone top (pointed studs)

Closed surface and pointed studs | Cone top surface pattern for superior grip | Easy-to-clean

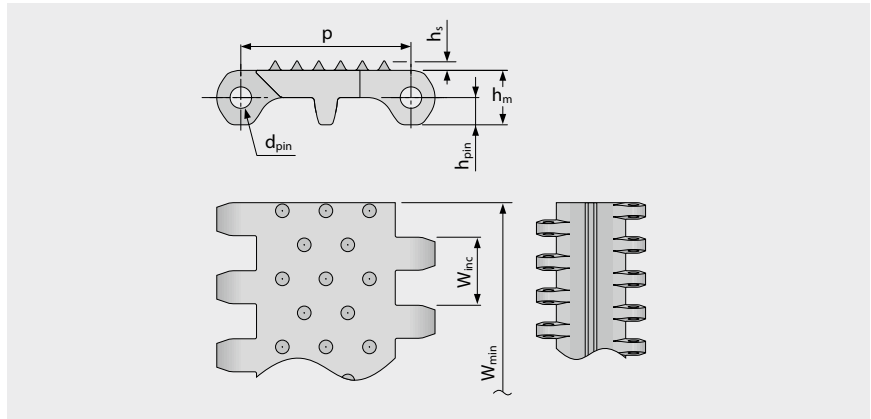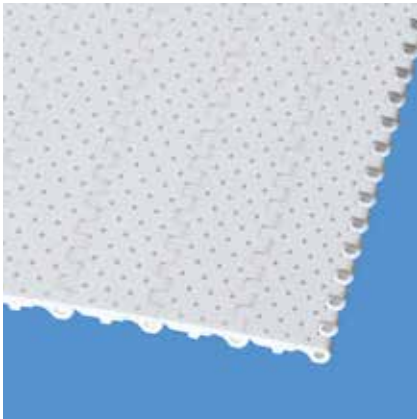

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	2.8	40.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.11	1.57	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	WT	PBT	UC	30	2056	13.5	2.77	-0.65	-45/90	-49/194	●	●	●
Mold to order belts													
PE		PE		13	891	9.5	1.95	-0.65	-70/65	-94/149			

Mold to width available in: 400 mm (15.75 in)

□ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 6.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-21 FLT | 21 % Opening | Flat top

Open area (21 %) for excellent air circulation and drainage | 72% contact area (Largest opening: 1.9 x 11 mm/0.07 x 0.43 in) | Smooth surface | Easy-to-clean

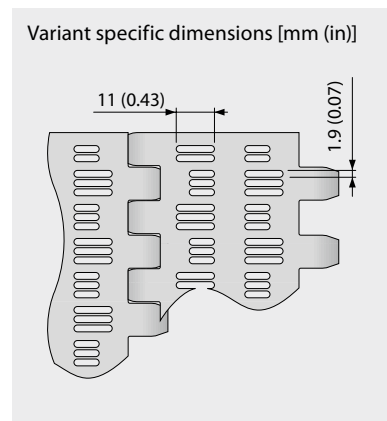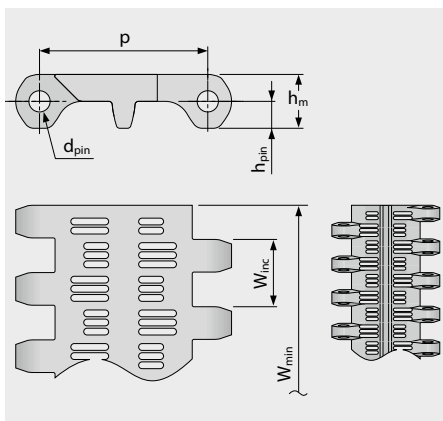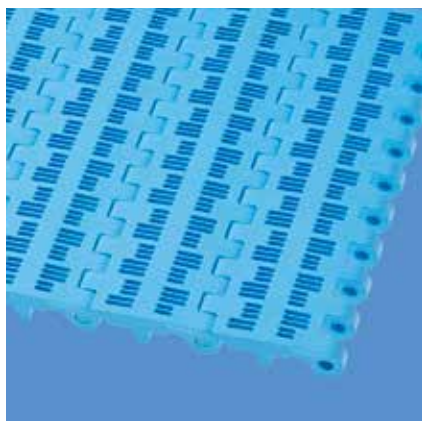

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	40.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	1.57	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	13	891	7.8	1.6	-0.5	-70/65	-94/149	●	●	●
PE	LB	PE	LB	13	891	7.8	1.6	-0.5	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	30	2056	10.8	2.21	-0.5	-45/90	-49/194	●	●	●
POM	LB	PBT	LB	30	2056	10.8	2.21	-0.5	-45/90	-49/194	●	●	●
PP	WT	PP	WT	18	1233	6.7	1.37	0.0	5/100	41/212	●	●	●
PP	LB	PP	LB	18	1233	6.7	1.37	0.0	5/100	41/212	●	●	●

### Mold to order belts

PLX	BL	PLX	BL	22	1507	10	2.05	-0.15	-45/120	-49/248	●	●	●
-----	----	-----	----	----	------	----	------	-------	---------	---------	---	---	---

Mold to width available in: 100 mm (3.94 in), 200 mm (7.87 in)

■ LB (Light blue), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 6.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-23 FLT | 23 % Opening | Flat top

Open area (23 %) for excellent air circulation and drainage | 71 % contact area | Smooth surface | Easy-to-clean

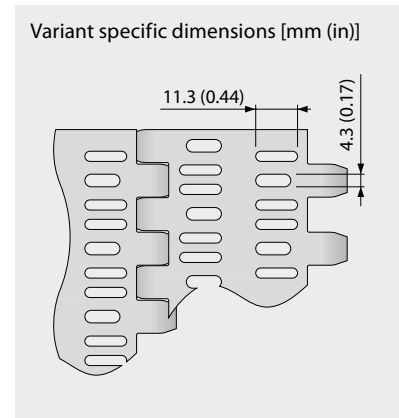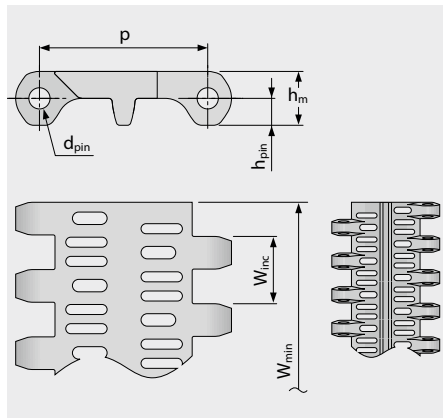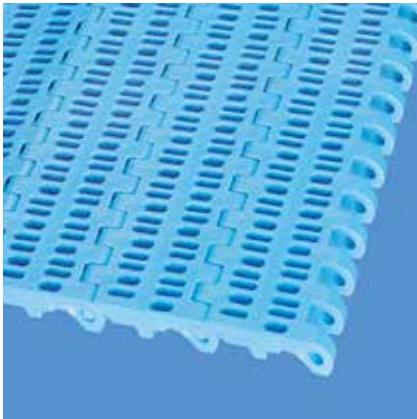

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	40.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	1.57	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	13	891	8.2	1.68	-0.5	-70/65	-94/149	●	●	●
PE	LB	PE	LB	13	891	8.2	1.68	-0.5	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	30	2056	11.3	2.31	-0.5	-45/90	-49/194	●	●	●
POM	LB	PBT	LB	30	2056	11.3	2.31	-0.5	-45/90	-49/194	●	●	●
PP	WT	PP	WT	18	1233	7.0	1.43	0.0	5/100	41/212	●	●	●
PP	LB	PP	LB	18	1233	7.0	1.43	0.0	5/100	41/212	●	●	●

### Mold to order belts

PE-MD	BL	POM-MD	BL	13	891	8.9	1.82	-0.5	-70/65	-94/149	●	●	●
POM-CR		PBT		30	2056	11.3	2.31	-0.5	-45/90	-49/194			
PE-I	UC	PE	WT	13	891	8.2	1.68	-0.5	-70/65	-94/149	●	●	●
PLX	BL	PLX	BL	22	1507	10.4	2.13	-0.15	-45/120	-49/248	●	●	●

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

Mold to width available in: 100 mm (3.94 in), 200 mm (7.87 in), 400 mm (15.75 in)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 6.1 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1-36 FLT | 36 % Opening | Flat top

Open area (36 %) for excellent air circulation and drainage | 35 % contact area (Largest opening:  $\varnothing = 12 \text{ mm}/0.47 \text{ in}$ ) |  
Smooth surface | Easy-to-clean

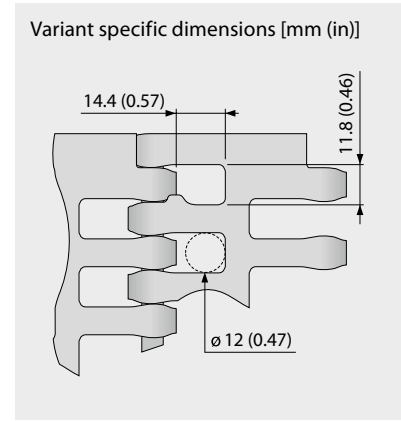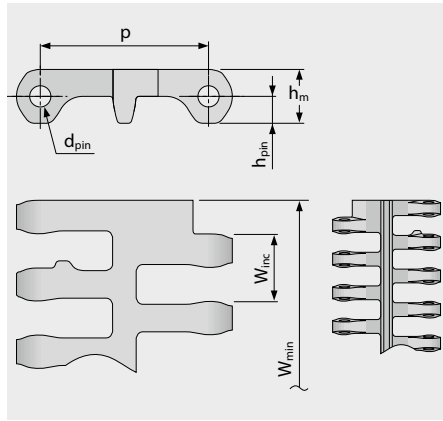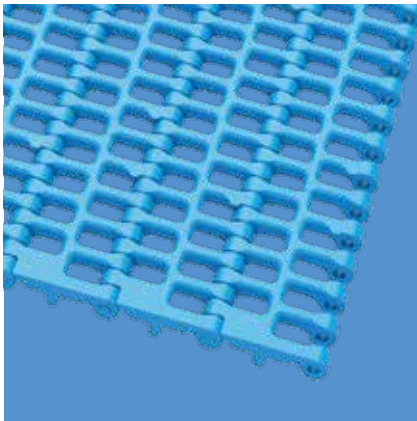

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	16.0	8.0	0.0	100.0	20.0	±0.2	–	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.63	0.31	0.0	3.94	0.79	±0.2	–	1.97	3.94	5.91	1.97

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	13	891	6.2	1.27	-0.5	-70/65	-94/149	●	●	●
PE	LB	PE	LB	13	891	6.2	1.27	-0.5	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	30	2056	9.0	1.84	-0.5	-45/90	-49/194	●	●	●
POM	LB	PBT	LB	30	2056	9.0	1.84	-0.5	-45/90	-49/194	●	●	●
PP	WT	PP	WT	18	1233	5.9	1.21	0.0	5/100	41/212	●	●	●
PP	LB	PP	LB	18	1233	5.9	1.21	0.0	5/100	41/212	●	●	●

Mold to order belts													
PP-MD	BL	PP-MD	BL	18	1233	6.4	1.31	0.0	5/100	41/212	●	●	●
PE-MD	BL	POM-MD	BL	13	891	6.7	1.37	-0.5	-70/65	-94/149	●	●	●
POM-MD	BL	POM-MD	BL	30	2056	9.2	1.88	-0.5	-45/90	-49/194	●	●	●
PLX	BL	PLX	BL	22	1507	8.6	1.76	-0.15	-45/120	-49/248	●	●	●

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 6.1 | PROSNAP

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts



## S6.1-0 FLT PSP | ProSnap

Quick-Release for easy, quick and toolless opening and closing of the belt | One pin solution for entire belt width

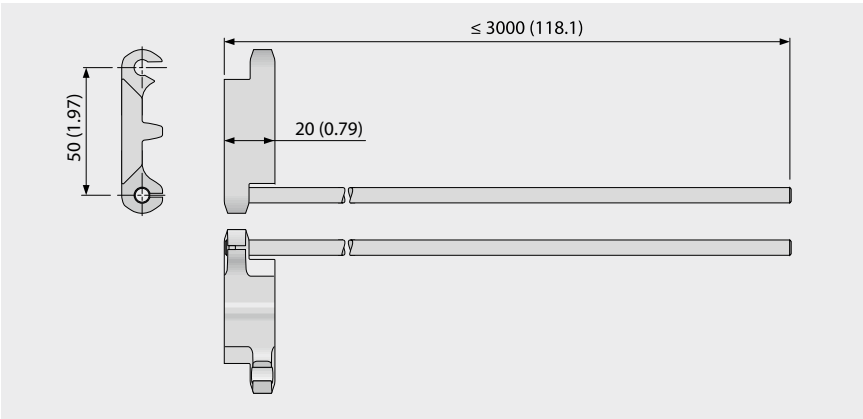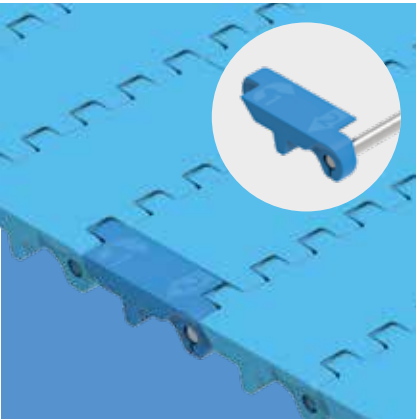

### Basic data

Module		Pin	
Material	Color	Material	Length [mm (in)]
POM	BL	SS	≤ 3000 (118)
Mold to order			
POM-MD	BL	SS	≤ 3000 (118)

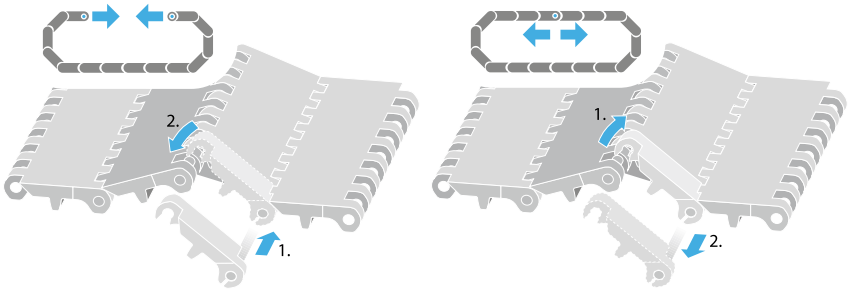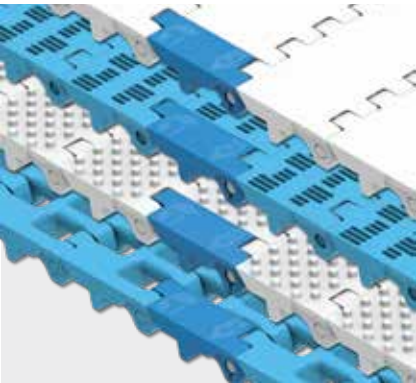

BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.


# SERIES 6.1 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1 SPR | Sprockets

Special easy-to-clean sprocket with enhanced tooth engagement for excellent force transmission

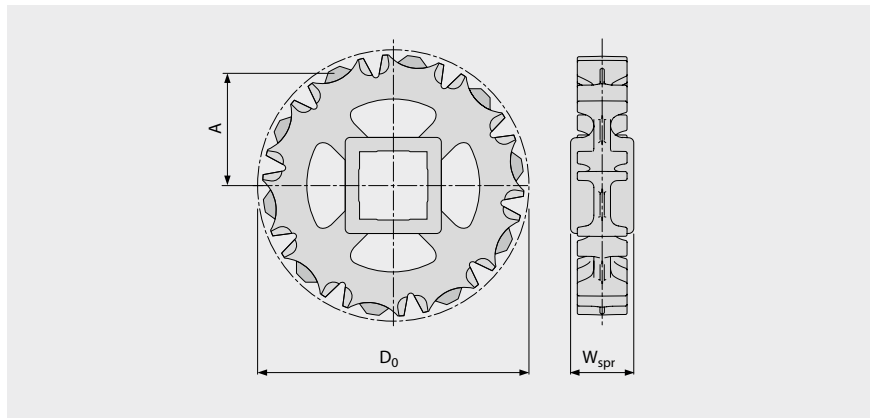

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z8	Z10	Z12	Z16
W <sub>spr</sub>	mm	38.0	38.0	38.0	38.0	38.0
	inch	1.5	1.5	1.5	1.5	1.5
D <sub>0</sub>	mm	101.6	132.9	163.5	195.3	257.8
	inch	4.00	5.23	6.44	7.69	10.15
A <sub>max</sub>	mm	41.6	57.8	73.3	89.3	120.7
	inch	1.64	2.28	2.89	3.52	4.75
A <sub>min</sub>	mm	36.0	53.4	69.7	86.3	118.4
	inch	1.42	2.10	2.74	3.40	4.66

### Shaft bores (● = Round, ■ = Square)

30	mm	●	●	●		
40	mm	■	■	■	■	■
60	mm			■	■	■
1	inch	●	●	●		
1.25	inch		●	●		
1.44	inch			●		
1.5	inch	■	■	■	● / ■	■
2	inch			■		■
2.5	inch			■	■	■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS





# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S6.1-0 FLT PMU/S6.1-0 FLT PMU I40

Flat top surface for dry products

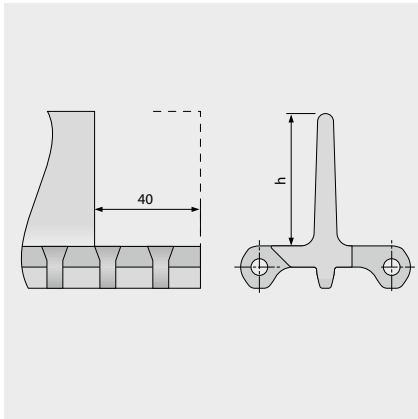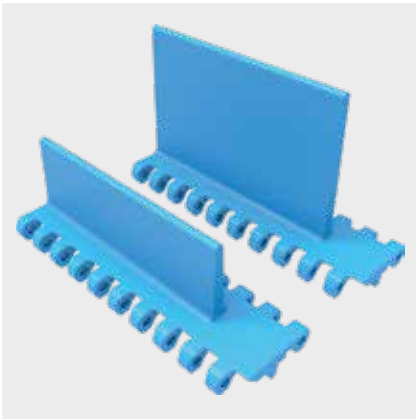


### Basic data


Material	Color	Height (h)		
		50 mm 2 inch	100 mm 4 inch	150 mm 6 inch
PE	LB/WT	●/▲	●/▲	●
POM-CR	LB		●	
POM	LB/WT	●/▲	●/▲	●/▲
POM-MD	BL	●	●	●
PP	LB/WT	●/▲	●/▲	●
PP-MD	BL		●	

● = no indent, ▲ = with indent 40 mm


Molded width: 200 mm (7.9 in)

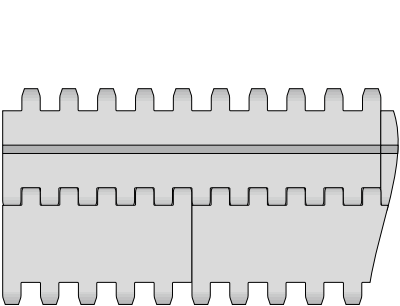

Standard configuration S6.1-0 FLT PMU

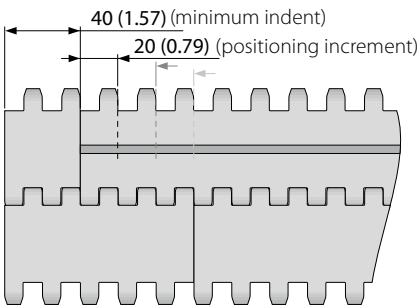

Indent configuration S6.1-0 FLT PMU

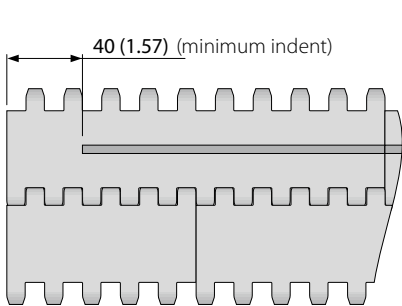

Standard configuration S6.1-0 FLT PMU I40

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S6.1-0 NCL PMU


No cling surface with nub top base to improve release of wet and sticky products

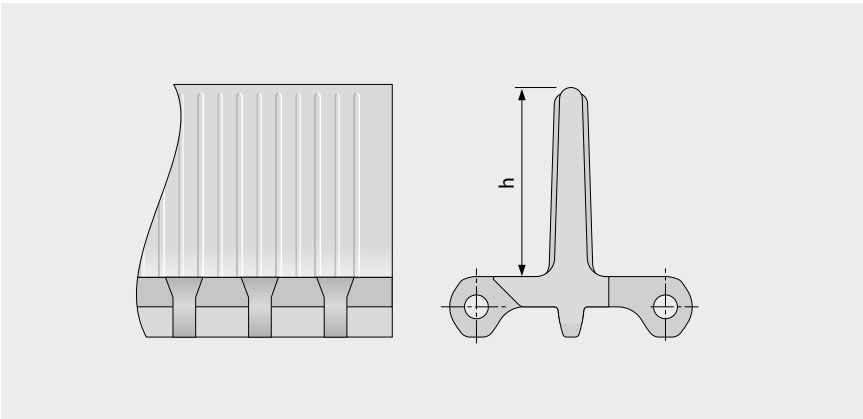


### Basic data

Material	Color	Height (h)
		100 mm 4 inch
PE	LB	●
PE	WT	●

Molded width: 200 mm (7.9 in)

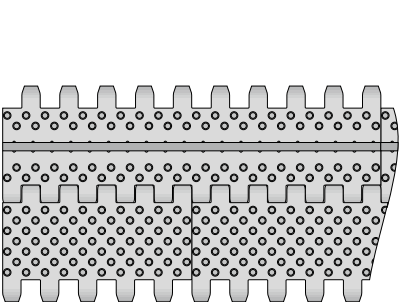

Standard configuration S6.1-0 NCL PMU

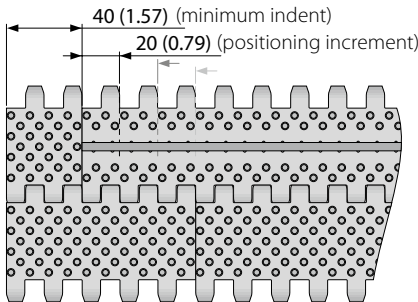

Indent configuration S6.1-0 NCL PMU

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siebling prolink  
modular belts

## S6.1-23 NCL PMU


No cling surface with open area base (23 %) to improve release of wet and sticky products

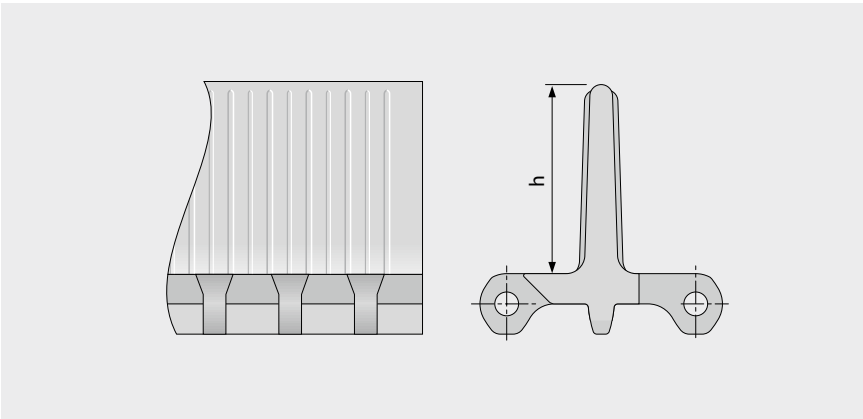

### Basic data

Material	Color	Height (h)
		100 mm 4 inch
PE	LB	●
PE	WT	●
PP	LB	●
PP	WT	●

Molded width: 200 mm (7.9 in)

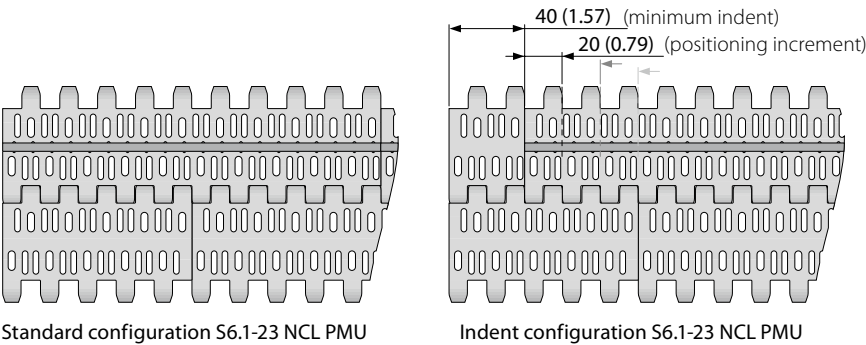

Standard configuration S6.1-23 NCL PMU

Indent configuration S6.1-23 NCL PMU

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siebling prolink  
modular belts

## S6.1-0 FLT PSU-0


Scooped profiles with a closed, flat top surface for steep incline conveyors

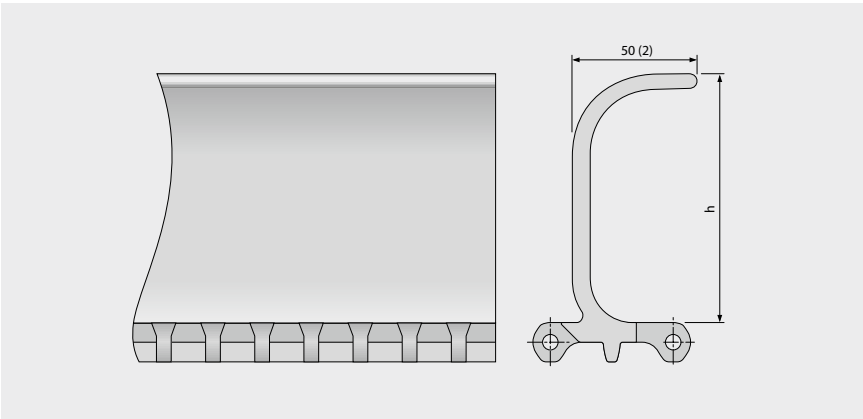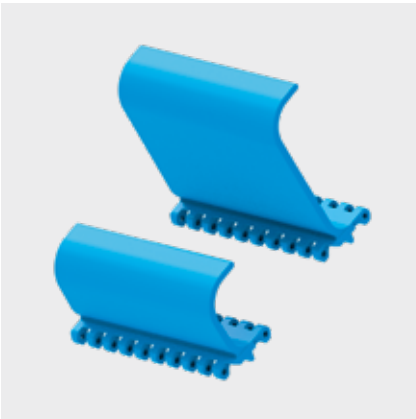


### Basic data

Material	Color	Height (h)		
		76 mm 3 inch	102 mm 4 inch	152 mm 6 inch
PE	LB	●	●	●
PE	WT	●	●	●
POM	LB	●	●	●
POM	WT	●	●	●
PP	LB	●	●	●
PP	WT	●	●	●
PP-MD	BL		●	●

Molded width: 200 mm (7.9 in)

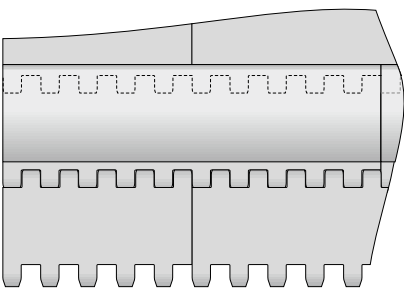

Standard configuration S6.1-0 FLT PSU-0

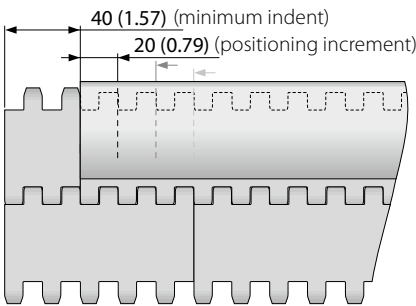

Indent configuration S6.1-0 FLT PSU-0

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S6.1-0 FLT PSU-16


Scooped profiles with 16 % open area and a flat top surface allowing product drainage when conveying up steep inclines

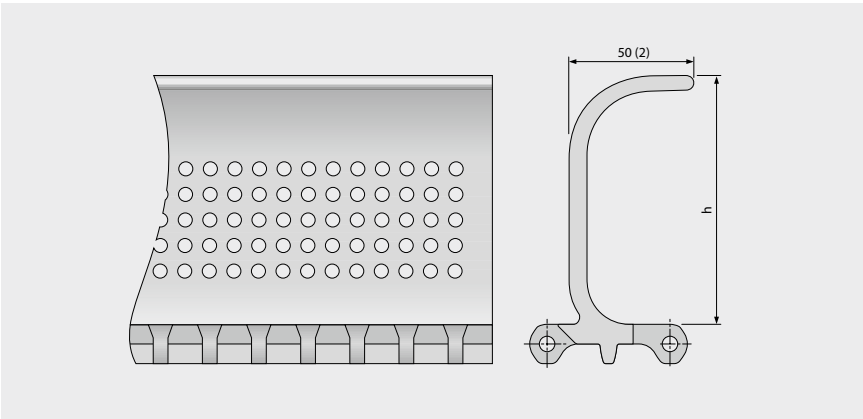


### Basic data

Material	Color	Height (h)	
		102 mm 4 inch	152 mm 6 inch
PE	LB	●	●
PE	WT	●	●
POM	LB	●	●
POM	WT	●	●
PP	LB	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

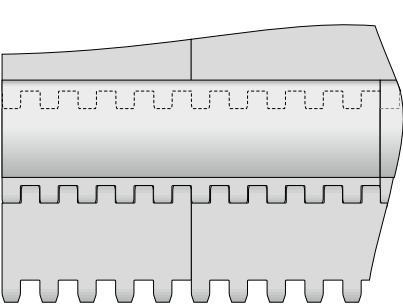

Standard configuration S6.1-0 FLT PSU-16

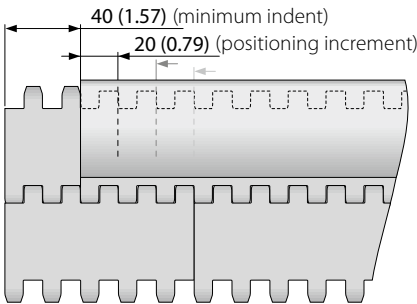

Indent configuration S6.1-0 FLT PSU-16

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 6.1 | PROFILES

Straight running belt | Pitch 50 mm (1.97 in)

siegling prolink  
modular belts

## S6.1-0 FLT BPU


Bucket Profiles for contained conveying of bulk products up steep inclines

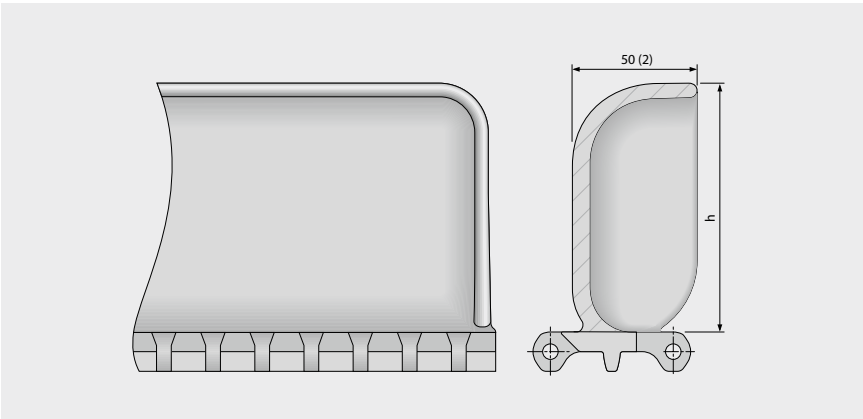


### Basic data

Material	Color	Height (h)	
		102 mm 4 inch	152 mm 6 inch
PE	LB	●	●
PE	WT	●	●
POM	LB	●	●
POM	WT	●	●
PP	LB	●	●
PP	WT	●	●

Molded width: 200 mm (7.9 in)

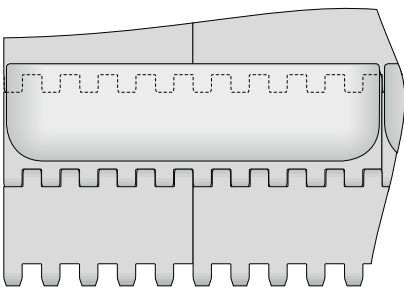

Standard configuration S6.1-0 FLT BPU

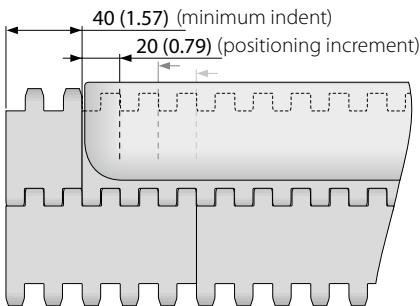

Indent configuration S6.1-0 FLT BPU

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 6.1 | SIDE GUARDS

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)


## S6.1 SG | Side guards

For retention of bulk products

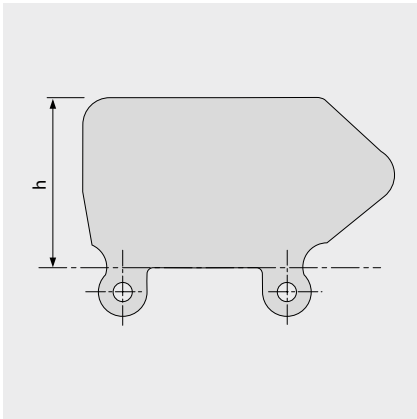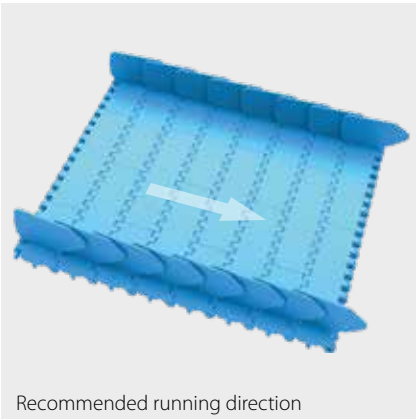

### Basic data

Material	Color	Height (h)			
		25 mm 1 inch	50 mm 2 inch	75 mm 3 inch	100 mm 4 inch
PE	LB	●	●	●	●
PE	WT	●	●	●	●
PE-MD	BL		●	●	●
PP	LB	●	●	●	●
PP	WT	●	●	●	●

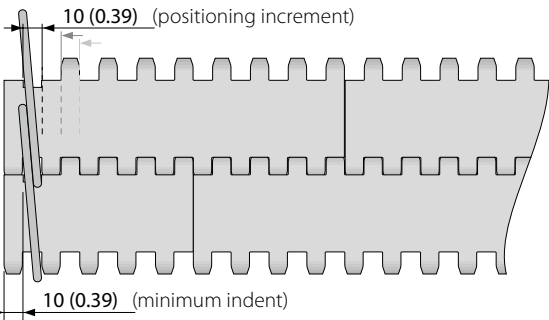

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




# SERIES 6.1 | HOLD DOWN TABS

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1 HDT | Hold Down Tabs

Used on wider belts to prevent lift an swan neck conveyors | To improve strength, stability and cleanability they are moulded on a narrow module

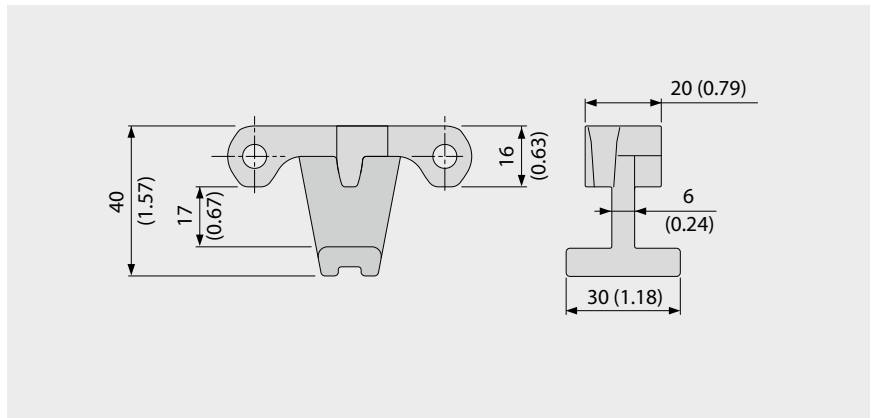


### Basic data

Material	Color
POM	LB
	WT

Using Hold Down Tabs results in constraints with regards to sprocket and shaft size to ensure sufficient clearance to the shaft (see also chapter 3.3 hold down tabs).

### Example

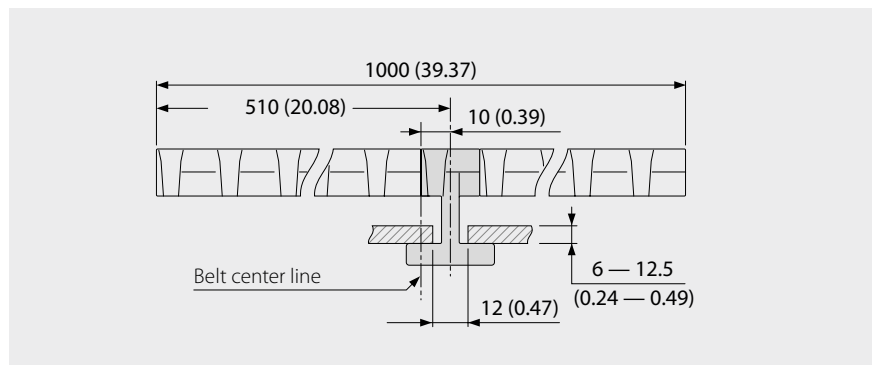

### Sprocket options using HDT

Sprocket size (Number of teeth)	Maximum bore round		Maximum bore square	
	[mm]	[inch]	[mm]	[inch]
Z6	20	0.75	15	0.5
Z8	50	1.75	40	1.5
Z10	80	3.0	60	2.5
Z12	110	4.25	85	3.25
Z16	170	6.5	130	5.25

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 6.1 | PRR

siegling prolink  
modular belts

Straight running belt | Pitch 50 mm (1.97 in)

## S6.1 PRR | Pin Retained Rollers

For applications where low back pressure accumulation or product separation is required

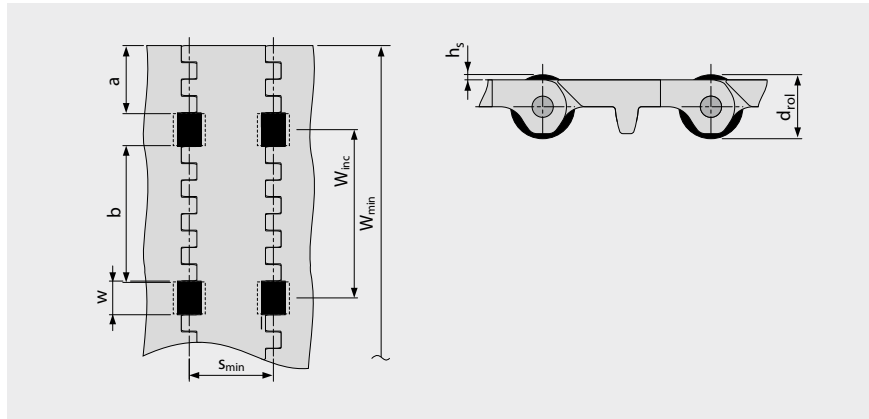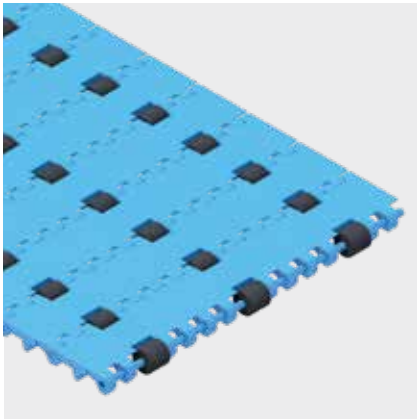

- For low back pressure wearstrips are to be positioned between the rollers
- For product separation the wearstrips are to be positioned below the rollers
- For all materials and surfaces
- Rollers available in POM BK

### Dimensions

w	20 mm (0.79 in)	Roller cut out width (roller width 19 mm (0.75 in))
h <sub>s</sub>	2.0 mm (0.08 in)	Height of rollers above surface
d <sub>rol</sub>	20 mm (0.79 in)	Roller diameter
a	40 mm (1.6 in)	Minimum indent
b	80 mm (3.15 in)	Standard distance between rollers across belt width
s	n x s <sub>min</sub>	Roller spacing in travel direction (standard: n = 1)
s <sub>min</sub>	50 mm (2.0 in)	Min. roller spacing in travel direction
W <sub>inc</sub>	100 mm (3.9 in)	Width increment
W <sub>min</sub>	200 mm (7.9 in)	Min. belt width
W <sub>B</sub>		Belt width
n <sub>rol</sub>		Number of rollers across belt width

### Allowable belt pull

To determine admissible belt pull calculate effective belt width  $W_{B,ef}$  by  
 $W_{B,ef} = W_B - (w \times n_{rol})$

Example:  $W_B = 400 \text{ mm (15.75 in)}$ ;  $w = 20 \text{ mm (0.79 in)}$ ;  $n_{rol} = 4$   
 $W_{B,ef} = 400 - (20 \times 4) = 320 \text{ mm}$   
 $W_{B,ef} = 15.75 - (0.79 \times 4) = 12.6 \text{ in}$

Note: Sprocket must not be placed inline with rollers. Deviation in roller spacing possible, please get in contact to customer service. Coefficient of friction between belt and conveyed product in accumulation mode  $\mu_{acc} = 0.04$ , i.e. the accumulation pressure is approx. 4% of the weight of the backed up product.

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 7**

Straight running belts  
Pitch 40 mm (1.57 in)

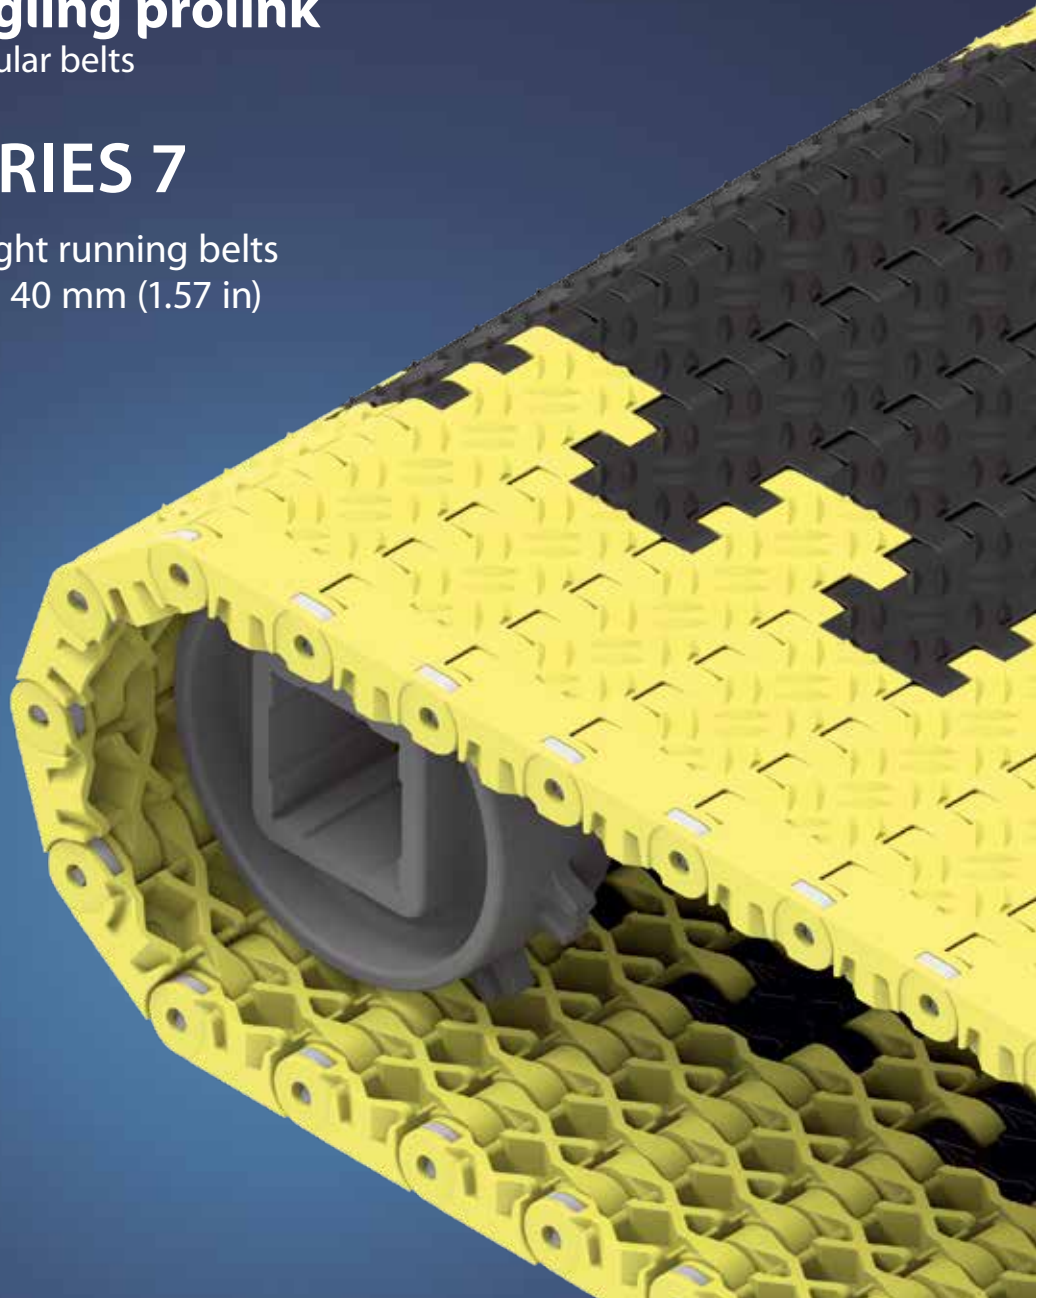


# SERIES 7 | OVERVIEW

Straight running belts | Pitch 40 mm (1.57 in)

**siebling prolink**  
modular belts

## Belts for heavy-duty non-food applications

Side view scale 1:1

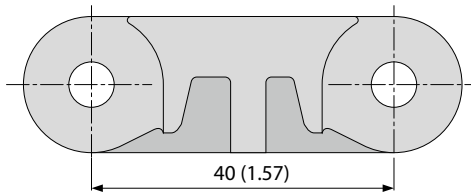

### Design characteristics


- Closed-hinge design provides high belt pull capacity
- Small-pitch relative to belt thickness makes belt suitable for compact, heavily loaded conveyors
- Robust design with large surface contact area ensures superior wear life
- Closed solid edge
- Flame retardant version available (PXX-HC – in line with DIN EN 13501-1)

### Basic data

Pitch	40 mm (1.57 in)
Belt width min.	80 mm (3.15 in) 360 mm (14.2 in) for belts with FRT-surface (side modules only available without FRT-surface)
Width increments	20 mm (0.8 in) FRT-surface on request
Hinge pins	6 mm (0.24 in) made of plastic (PBT) or stainless steel

### Sprockets

in different sizes with round or square bore

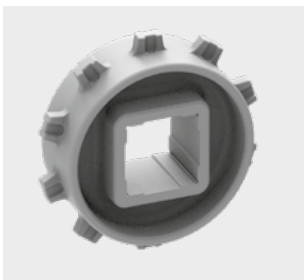


### Wheelstopper

used for securing the position of vehicles on the belt



Available surface pattern and opening area

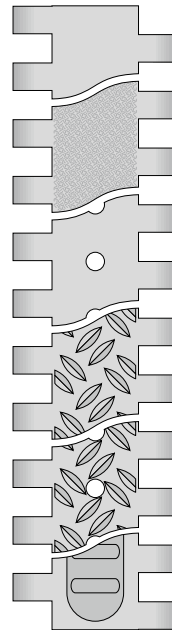

#### S7-0 FLT

Closed, smooth surface

#### S7-0 SRS

Closed, slip-resistant surface

#### S7-6 FLT

Open (6%), smooth surface

#### S7-0 NSK

Closed surface with non skid pattern

#### S7-6 NSK

Open (6%) surface with non skid pattern

#### S7-0 FRT1

Closed surface with friction top



# SERIES 7 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

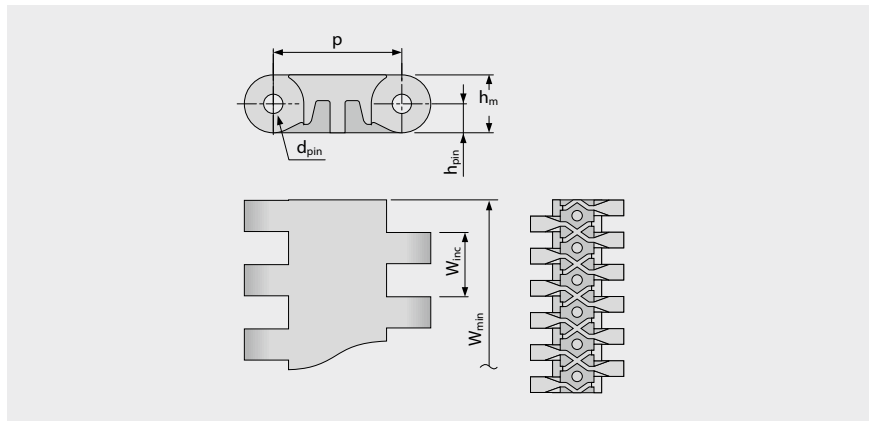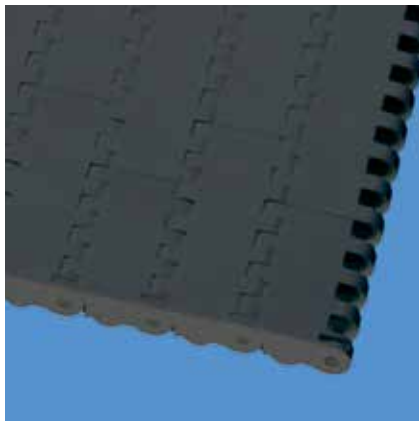

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	0.0	80.0	20.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.0	3.15	0.79	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	50	3426	18.3	3.75	-0.75	-45/90	-49/194	–
POM	AT	SS		60	4111	22.8	4.67	-0.75	-45/90	-49/194	–
POM	YL	PBT	UC	50	3426	18.3	3.75	-0.75	-45/90	-49/194	–
POM	YL	SS		60	4111	22.8	4.67	-0.75	-45/90	-49/194	–
POM-HC	AT	PBT	UC	50	3426	18.8	3.85	-0.75	-45/90	-49/194	–
POM-HC	AT	SS		60	4111	23.3	4.77	-0.75	-45/90	-49/194	–

### Mold to order belts

PE		PE	UC	18	1233	12.3	2.52	-0.35	-70/65	-94/149	–
PP		PP	WT	30	2056	11.6	2.38	0.0	5/100	41/212	–
PP		SS		30	2056	16.5	3.38	0.0	5/100	41/212	–
PXX-HC	BK	PBT	UC	30	2056	12.8	2.62	-0.13	5/100	41/212	●
PXX-HC	BK	SS		30	2056	17.7	3.63	-0.13	5/100	41/212	●

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White), ■ YL (Yellow)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 7 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 SRS | 0% Opening | Slip-resistant

Closed surface | Slip-resistant surface, pleasant to walk and kneel on | Flat top surface

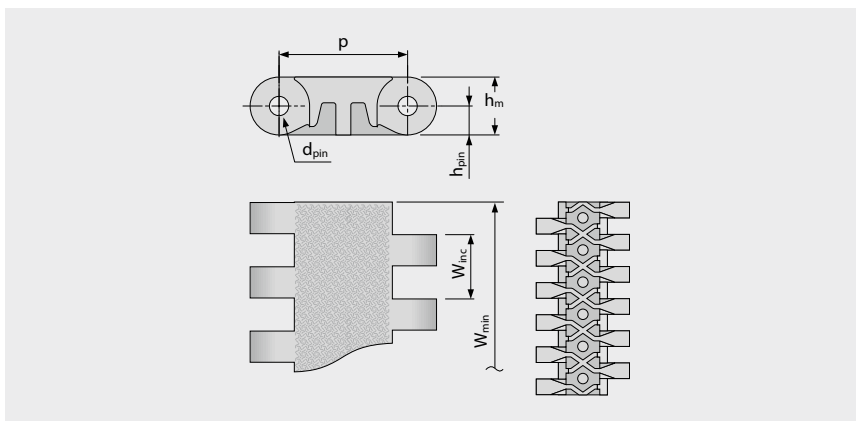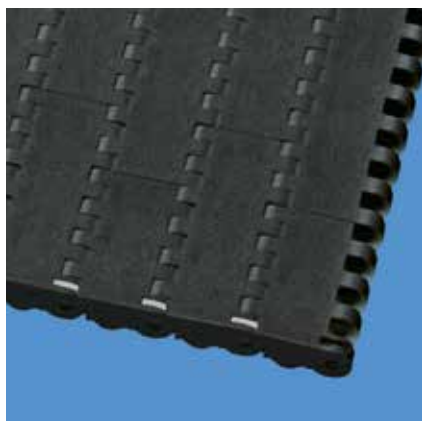

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	0.0	80.0	20.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.0	3.15	0.79	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	50	3426	18.3	3.75	-0.75	-45/90	-49/194	–
POM	AT	SS		60	4111	22.8	4.67	-0.75	-45/90	-49/194	–
POM	YL	PBT	UC	50	3426	18.3	3.75	-0.75	-45/90	-49/194	–
POM	YL	SS		60	4111	22.8	4.67	-0.75	-45/90	-49/194	–
POM-HC	AT	PBT	UC	50	3426	18.8	3.85	-0.75	-45/90	-49/194	–
POM-HC	AT	SS		60	4111	23.3	4.77	-0.75	-45/90	-49/194	–
PXX-HC	BK	PBT	UC	30	2056	12.8	2.62	-0.13	5/100	41/212	●
PXX-HC	BK	SS		30	2056	17.7	3.63	-0.13	5/100	41/212	●

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), ■ YL (Yellow)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS






# SERIES 7 | BELT TYPES

Straight running belt | Pitch 40 mm (1.57 in)

**siebling prolink**  
modular belts

## S7-6 FLT | 6 % Opening | Flat top

Open area (6 %) increases drainage capacity | Smooth surface

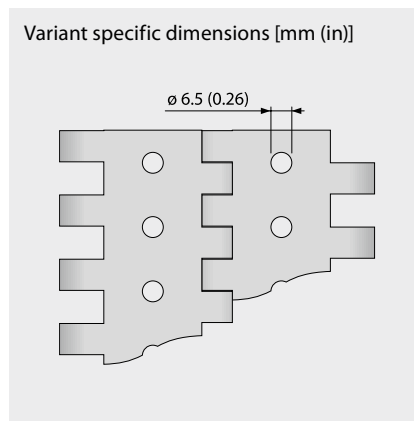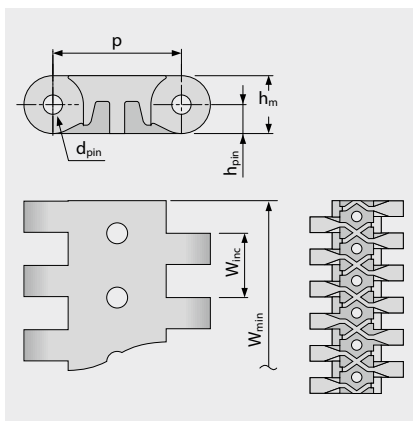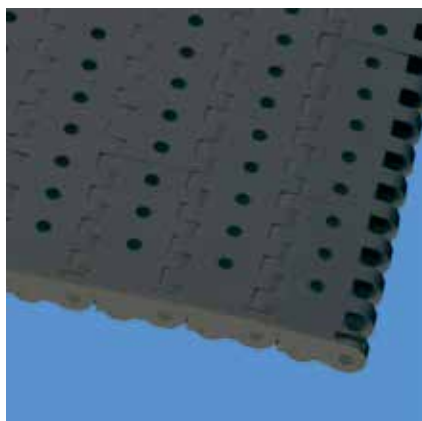

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	0.0	80.0	20.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.0	3.15	0.79	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	50	3426	16.8	3.44	-0.7	-45/90	-49/194	–
POM	AT	SS		60	4111	21.3	4.36	-0.7	-45/90	-49/194	–

Mold to order belts											
PE		PE	UC	18	1233	11.3	2.31	0.0	-70/65	-94/149	–
PP		PP	WT	30	2056	10.7	2.19	0.0	5/100	41/212	–
PP		SS		30	2056	15.6	3.2	0.0	5/100	41/212	–
POM-HC	AT	PBT	UC	50	3426	17.3	3.54	-0.75	-45/90	-49/194	–
POM-HC	AT	SS		60	4111	21.4	4.38	-0.75	-45/90	-49/194	–
PXX-HC	BK	PBT	UC	30	2056	11.8	2.42	-0.13	5/100	41/212	●
PXX-HC	BK	SS		30	2056	16.3	3.34	-0.13	5/100	41/212	●

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 7 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 NSK | 0 % Opening | Non skid

Closed surface | Non skid surface for safety when walking on belt

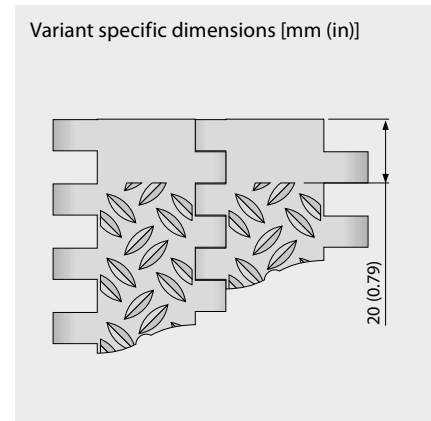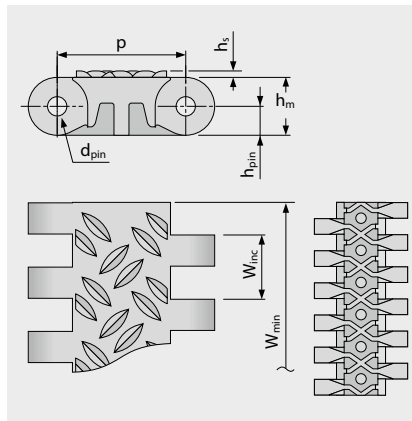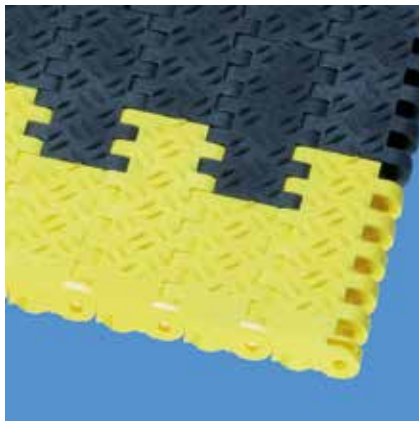

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	2.0	80.0	20.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.08	3.15	0.79	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation [%]	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]		[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	50	3426	19.0	3.89	-0.75	-45/90	-49/194	–
POM	AT	SS		60	4111	23.5	4.81	-0.75	-45/90	-49/194	–
POM-HC	AT	PBT	UC	50	3426	19.5	3.99	-0.75	-45/90	-49/194	–
POM-HC	AT	SS		60	4111	24.0	4.92	-0.75	-45/90	-49/194	–
PXX-HC	BK	PBT	UC	30	2056	14.6	2.99	-0.13	5/100	41/212	●
PXX-HC	BK	SS		30	2056	20.0	4.1	-0.13	5/100	41/212	●

### Mold to order belts

PP		PP	WT	30	2056	13.3	2.72	0.0	5/100	41/212	–
PP		SS		30	2056	18.2	3.73	0.0	5/100	41/212	–

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 7 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-6 NSK | 6 % Opening | Non skid

Open area (6 %) | Non skid surface with drainage holes for safety when walking on wet belts

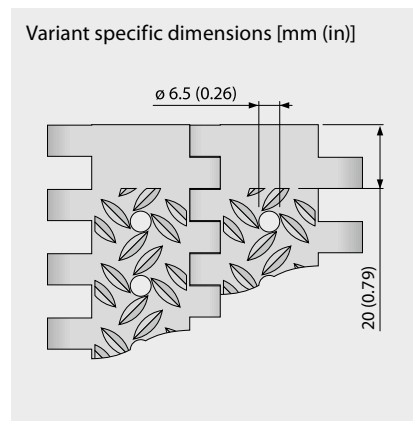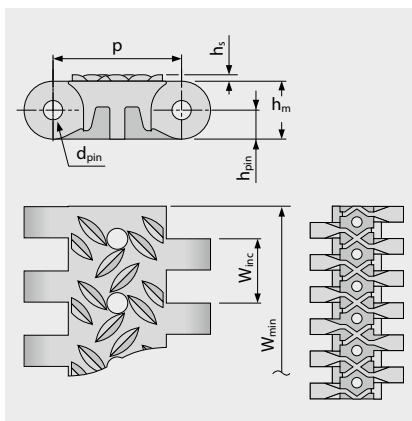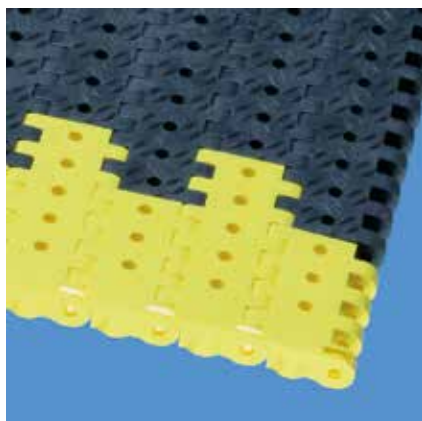

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	2.0	80.0	20.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.08	3.15	0.79	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation [%]	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]		[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	50	3426	17.5	3.58	-0.7	-45/90	-49/194	–
POM	AT	SS		60	4111	22.0	4.51	-0.7	-45/90	-49/194	–

Mold to order belts											
PP		PP	WT	30	2056	11.2	2.29	0.0	5/100	41/212	–
PP		SS		30	2056	14.1	2.89	0.0	5/100	41/212	–
PXX-HC	BK	PBT	UC	30	2056	12.3	2.52	-0.13	5/100	41/212	●
PXX-HC	BK	SS		30	2056	17.2	3.52	-0.13	5/100	41/212	●

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 7 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top version with replaceable rubber pads provides increased grip

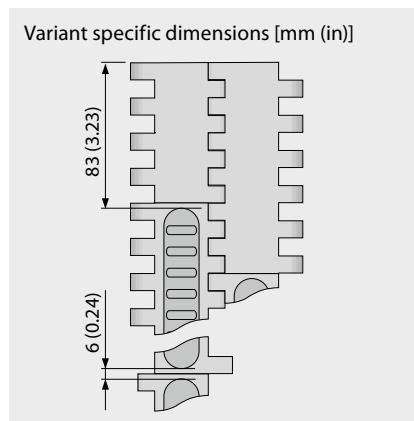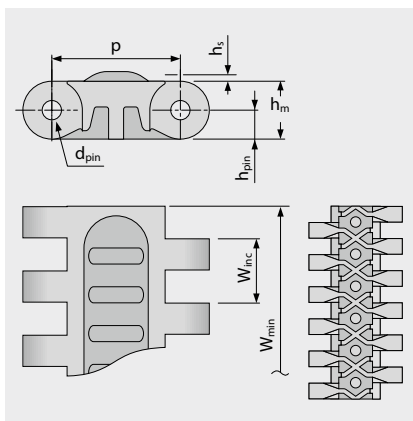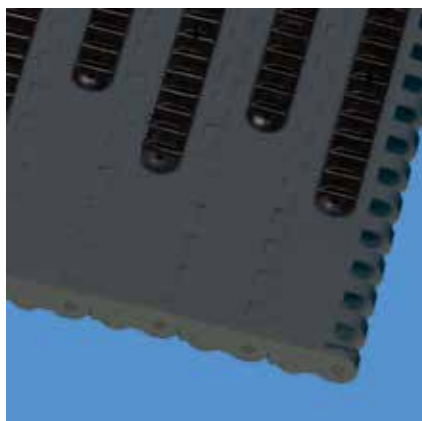

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	40.0	6.0	18.0	9.0	3.0	360.0	200.0	±0.2	–	40.0	80.0	120.0	40.0
inch	1.57	0.24	0.71	0.35	0.12	14.17	7.87	±0.2	–	1.57	3.15	4.72	1.57

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	Flame retardant
POM	AT	PBT	UC	R2	BK	50	3426	19.0	3.89	-0.75	-45/90	-49/194	–
POM	AT	SS		R2	BK	60	4111	23.5	4.81	-0.75	-45/90	-49/194	–

Mold to order belts													
PE		PE	UC	R2	BK	18	1233	13.0	2.66	-0.35	-70/65	-94/149	–
PP		PP	WT	R2	BK	30	2056	12.4	2.54	0.0	5/100	41/212	–
PP		SS		R2	BK	30	2056	17.3	3.54	0.0	5/100	41/212	–

■ AT (Anthracite), ■ BK (Black), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





MOVEMENT SYSTEMS

# SERIES 7 | SPROCKETS

Straight running belt | Pitch 40 mm (1.57 in)

**siegling prolink**  
modular belts

## S7 SPR | Sprockets

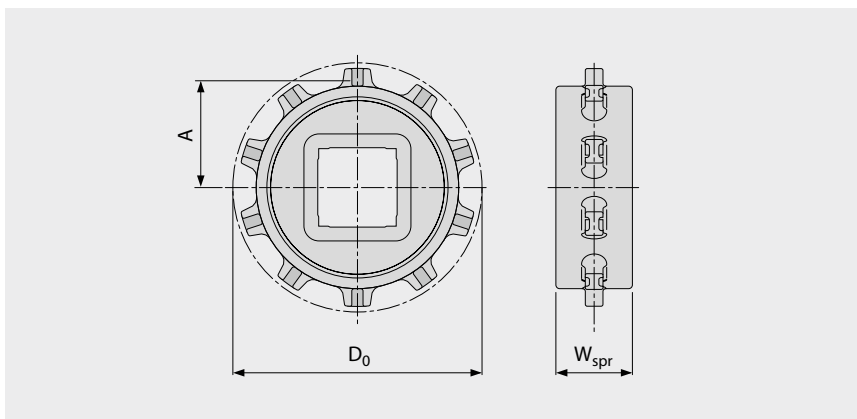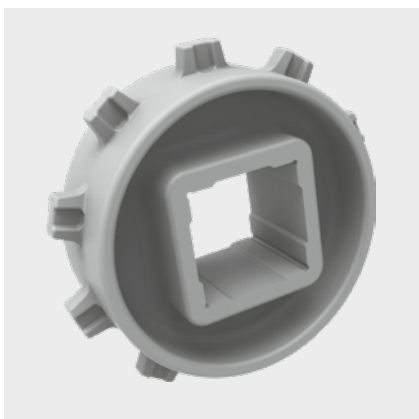

### Main dimensions

Sprocket size (Number of teeth)		Z10	Z16 V2	Z20 V2
W <sub>spr</sub>	mm	39.0	39.0	39.0
	inch	1.54	1.54	1.54
D <sub>0</sub>	mm	129.7	204.8	255.1
	inch	5.11	8.06	10.04
A <sub>max</sub>	mm	55.9	93.5	118.6
	inch	2.20	3.68	4.67
A <sub>min</sub>	mm	53.2	91.5	117.1
	inch	2.09	3.60	4.61

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

40	mm	■		
60	mm		■	■
80	mm		■	□
90	mm			■
1.5	inch	■		
2.5	inch		■	□
3.5	inch			□

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS


# SERIES 7 | WHEELSTOPPER

siebling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 FLT WSC | Wheelstopper


Stiff and strong profiles (interrupted for finger plates)

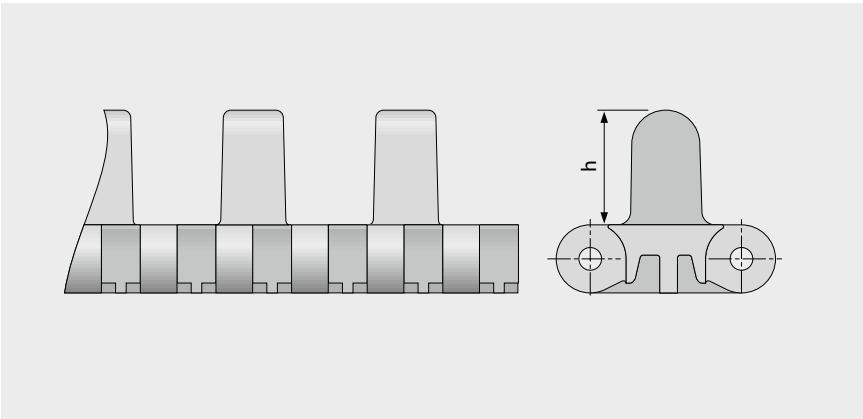

### Basic data

Material	Color	Height (h)
		30 mm 1.2 inch
POM	DB	●

Molded width: 160 mm (6.3 in)

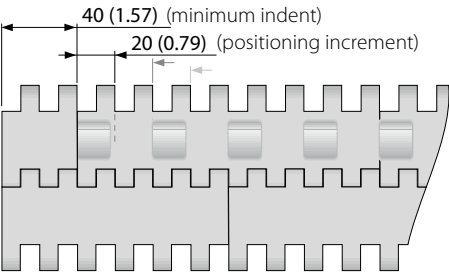

Configuration S7-0 FLT WSC

■ DB (Dark blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 7 | WHEELSTOPPER

siegling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7-0 NCL WSS I20 | Wheelstopper


Small and stiff profiles (interrupted for finger plates)

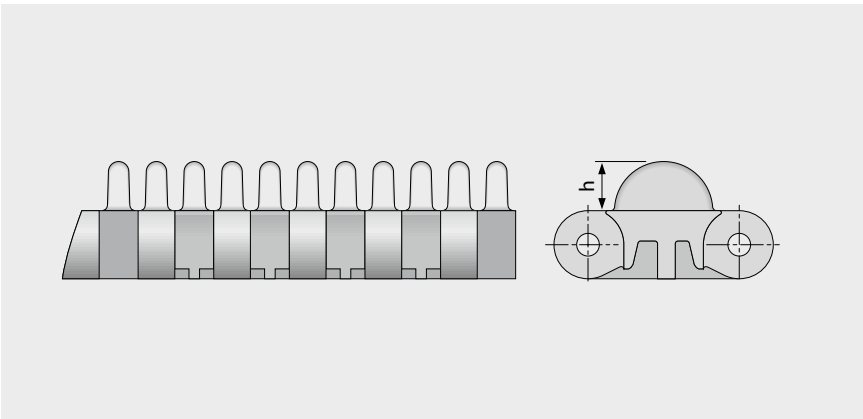

### Basic data

Material	Color	Height (h)
		13 mm 0.5 inch
POM	YL	●

Molded width: 80 mm (3.2 in), 120 mm (4.7 in)

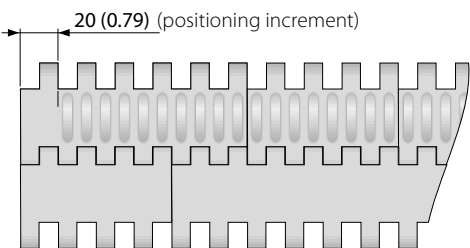

Configuration S7-0 NCL WSS I20

YL (Yellow)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS





# SERIES 7 | PRR

siegling prolink  
modular belts

Straight running belt | Pitch 40 mm (1.57 in)

## S7 PRR | Pin Retained Rollers

For applications where low back pressure accumulation or product separation is required

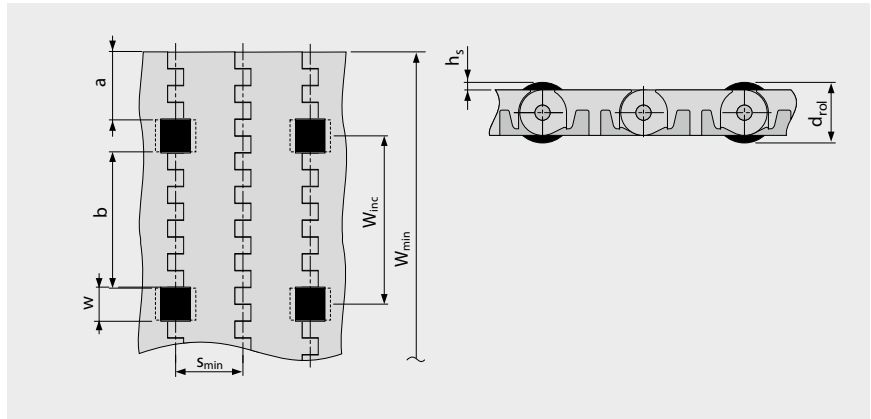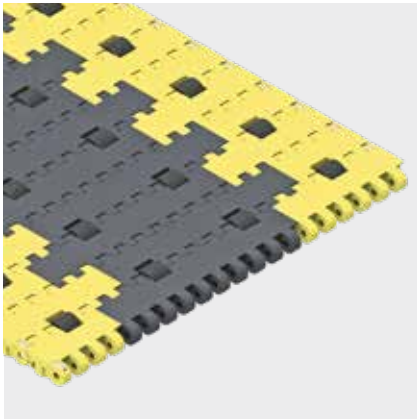

- For low back pressure wearstrips are to be positioned between the rollers
- For product separation the wearstrips are to be positioned below the rollers
- For all materials and surfaces
- Rollers available in POM BK

### Dimensions

w	20 mm (0.79 in)	Roller cut out width (roller width 19 mm (0.75 in))
h <sub>s</sub>	3.5 mm (0.14 in)	Height of rollers above surface
d <sub>rol</sub>	25 mm (0.98 in)	Roller diameter
a	40 mm (1.6 in)	Minimum indent
b	80 mm (3.15 in)	Standard distance between rollers across belt width
s	n x s <sub>min</sub>	Roller spacing in travel direction (standard: n = 2)
s <sub>min</sub>	40 mm (1.6 in)	Min. roller spacing in travel direction
W <sub>inc</sub>	100 mm (3.9 in)	Width increment
W <sub>min</sub>	200 mm (7.9 in)	Min. belt width
W <sub>B</sub>		Belt width
n <sub>rol</sub>		Number of rollers across belt width

### Allowable belt pull

To determine admissible belt pull calculate effective belt width  $W_{B,ef}$  by

$$W_{B,ef} = W_B - (w \times n_{rol})$$

Example:

$$W_B = 400 \text{ mm (15.75 in); } w = 20 \text{ mm (0.79 in); } n_{rol} = 4$$

$$W_{B,ef} = 400 - (20 \times 4) = 320 \text{ mm}$$

$$W_{B,ef} = 15.75 - (0.79 \times 4) = 12.6 \text{ in}$$

Note: Sprocket must not be placed inline with rollers. Deviation in roller spacing possible, please get in contact to customer service. Coefficient of friction between belt and conveyed product in accumulation mode  $\mu_{acc} = 0.04$ , i.e. the accumulation pressure is approx. 4% of the weight of the backed up product.

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 8**

Straight running belts  
Pitch 25.4 mm (1 in)

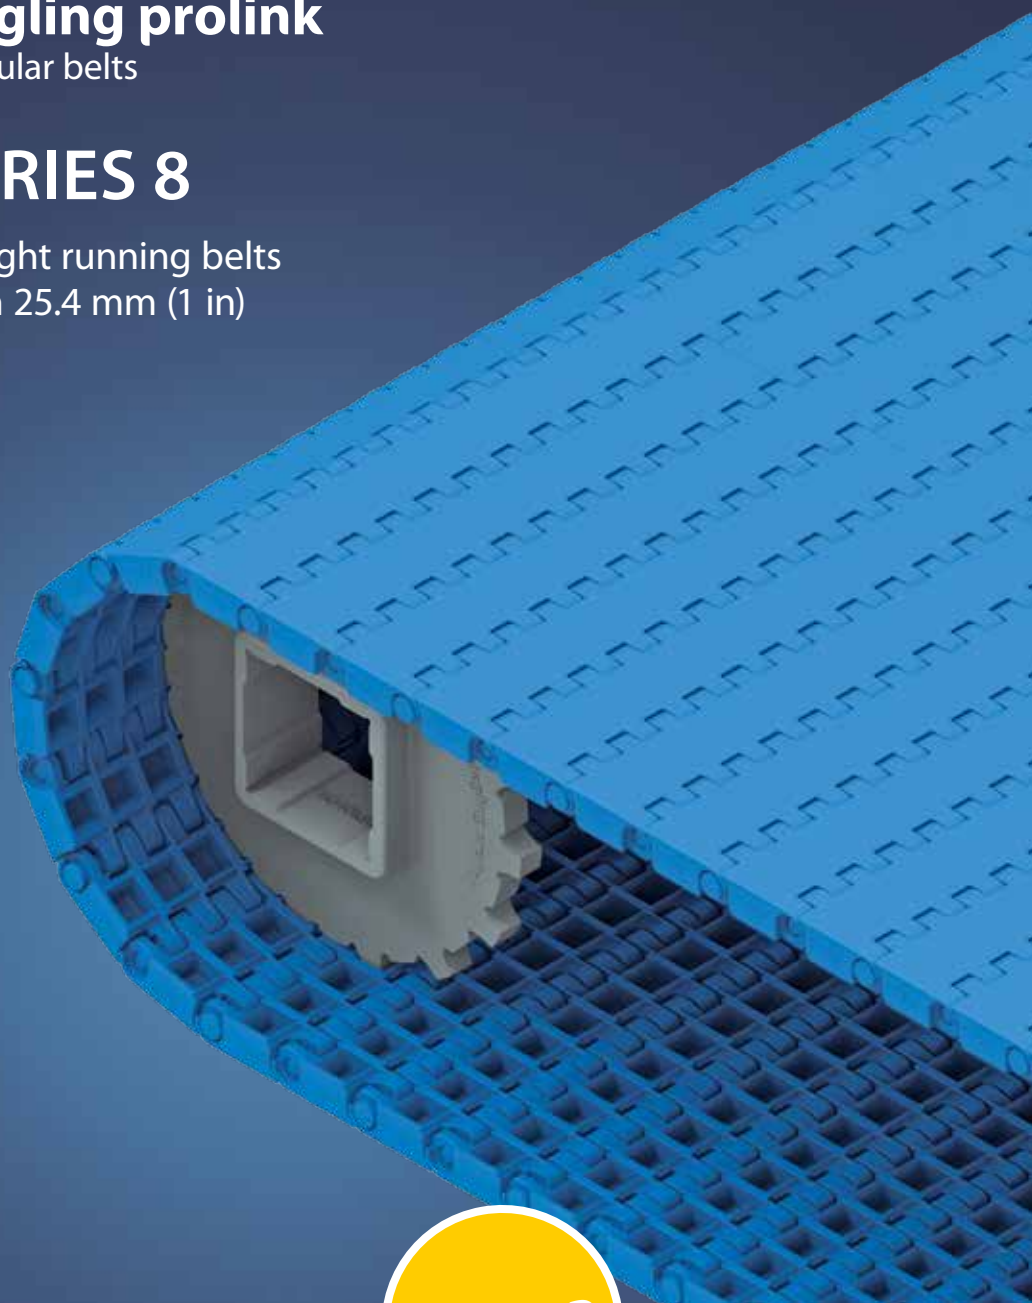

**PATENTED**


# SERIES 8 | OVERVIEW

**siebling prolink**  
modular belts

Straight running belts | Pitch 25.4 mm (1 in)

## Belts for medium to heavy-duty applications

### Side view scale 1:1

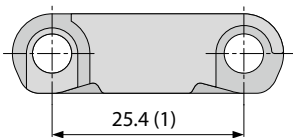


### Design characteristics

- Closed hinge design provides high belt pull capacity
- Rigid module design makes belt suitable for long conveyors
- Exceptionally robust and durable module and sprocket design
- Closed solid edge design
- Flame retardant version available (PXX-HC – in line with DIN EN 13501-1)

### Basic data

Pitch	25.4 mm (1 in)
Belt width min.	38.1 mm (1.5 in)
Width increments	12.7 mm (0.5 in)
Hinge pins	5 mm (0.2 in) made of plastic (PBT, PP, PA-HT). One-piece up to a belt width of 1200 mm (47 in).

### Available surface pattern and opening area

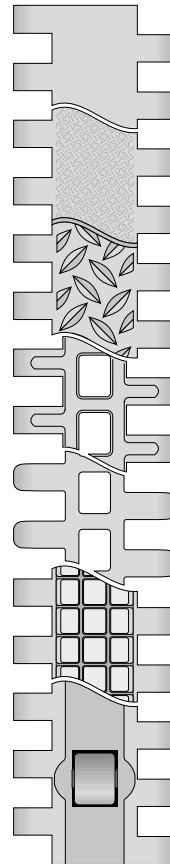

#### S8.1-0 FLT

Closed, smooth surface

#### S8.1-0 SRS

Closed, slip-resistant surface

#### S8.1-0 NSK/S8.1-0 NSK2

Closed surface with non skid pattern

#### S8.1-25 RAT

Open (25 %) surface  
with rounded contact surfaces

#### S8.1-30 FLT

Open (30 %) flat top surface  
with rounded hinges

#### S8-0 FRT1

Closed surface with friction top

#### S8-0 RTP A90

Closed surface with roller top


### Sprockets

in different sizes with round or square bore, one part and split



### Profiles

in different heights and designs for inclines

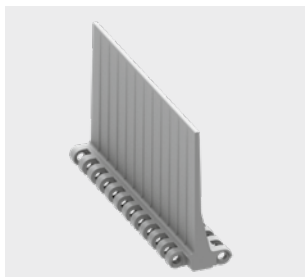

### Side guards

in different heights for retention of bulk products



### Hold Down Tabs

Hold Down Tabs for additional guiding





# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

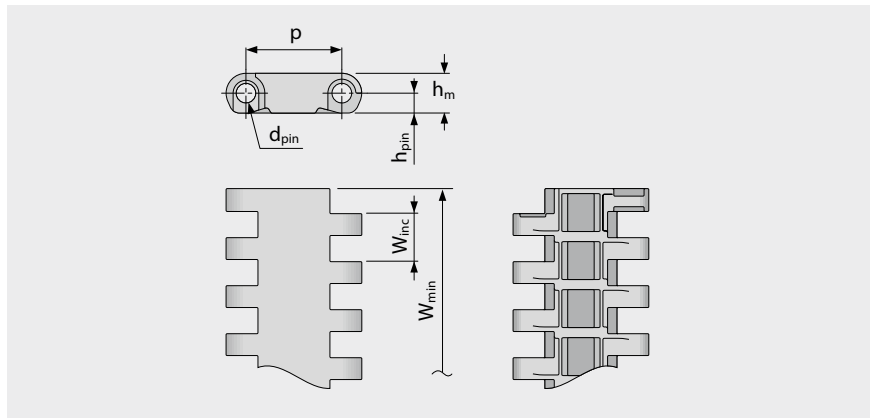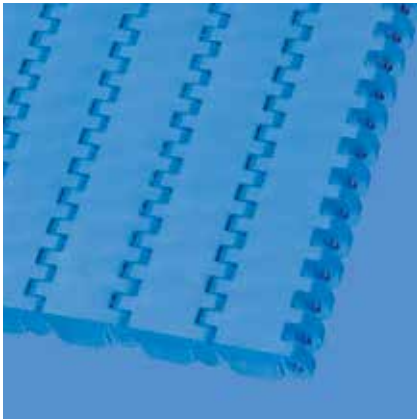

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	0.0	38.1	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.0	1.5	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	40	2741	11.0	2.25	-0.31	-45/90	-49/194	●	●	●
POM	LG	PBT	UC	40	2741	11.0	2.25	-0.31	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	40	2741	11.0	2.25	-0.31	-45/90	-49/194	●	●	●
POM-CR	AT	PBT	UC	40	2741	11.0	2.25	-0.31	-45/90	-49/194			
PP	WT	PP	WT	20	1370	7.1	1.45	0.0	5/100	41/212	●	●	●
PP	LG	PP	WT	20	1370	7.1	1.45	0.0	5/100	41/212	●	●	●
PP	BL	PP	BL	20	1370	7.1	1.45	0.0	5/100	41/212	●	●	●
PA-HT	BK	PA-HT	BK	30	2056	10.7	2.19	1.49	-30/155	-22/311	–	–	

#### Mold to order belts

PXX-HC	BK	PBT	BL	20	1370	7.9	1.62	0.0	5/100	41/212	–	–	
--------	----	-----	----	----	------	-----	------	-----	-------	--------	---	---	--

Mold to width available in: 51 mm (2.0 in), 76 mm (3.0 in), 152 mm (6.0 in), 229 mm (9.0 in)

■ AT (Anthracite), ■ BK (Black), ■ BL (Blue), ■ LG (Light gray), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-0 SRS | 0% Opening | Slip-resistant surface

Closed surface | Slip-resistant surface, pleasant to walk and kneel on

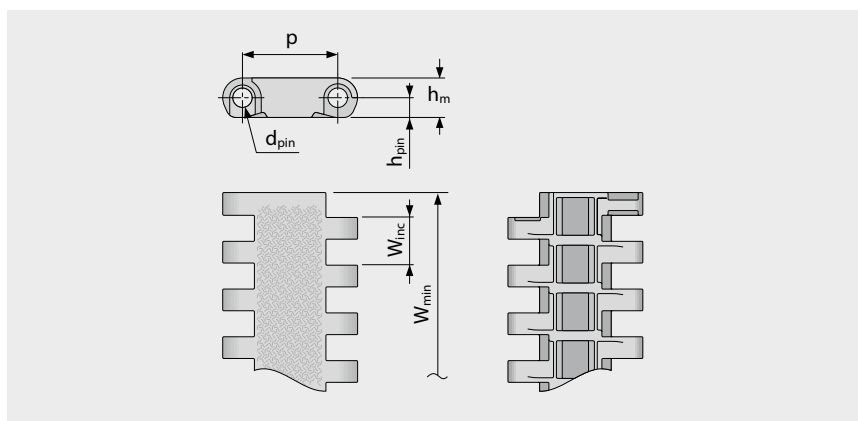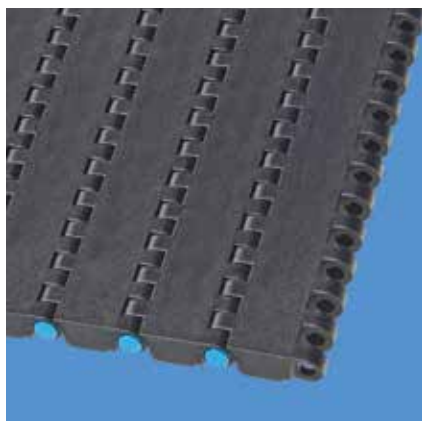

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	0.0	38.1	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.0	1.5	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	Flame retardant
POM-CR	AT	PBT	BL	40	2741	11.0	2.25	-0.31	-45/90	-49/194	–
POM-HC	AT	PBT	BL	40	2741	11.0	2.25	-0.31	-45/90	-49/194	–
PXX-HC	BK	PBT	BL	20	1370	7.9	1.62	0.0	5/100	41/212	●

Mold to width available in: 51 mm (2.0 in), 76 mm (3.0 in), 152 mm (6.0 in), 229 mm (9.0 in)

■ AT (Anthracite), ■ BK (Black), ■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-0 NSK | 0 % Opening | Non skid

Closed surface | Non skid surface for increased safety when walking on belt | Flat top sections across the belt width for supporting the belt on the return

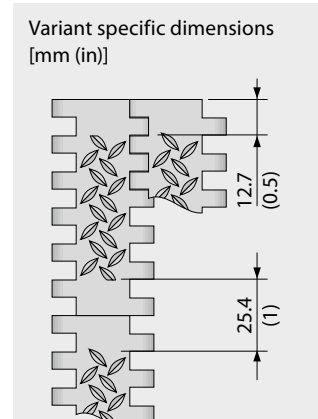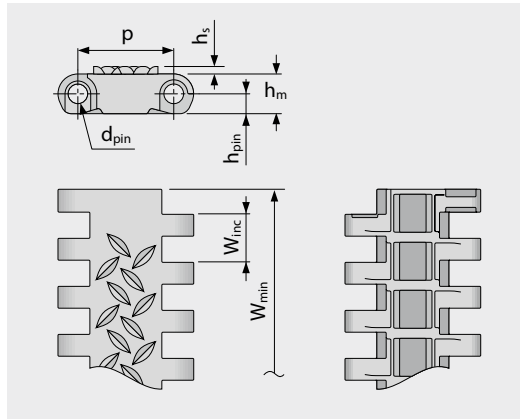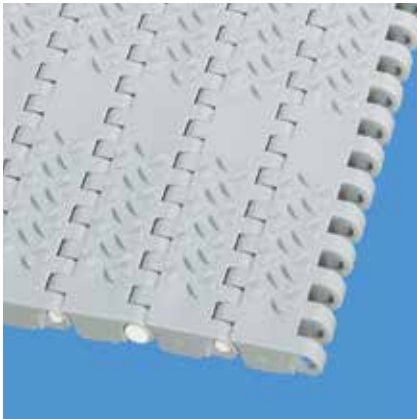

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	2.0	38.1	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.08	1.5	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	40	2741	11.0	2.25	-0.31	-45/90	-49/194	●	●	●
PP	LG	PP	WT	20	1370	7.1	1.45	0.0	5/100	41/212	●	●	●
PXX-HC	BK	PBT	BL	20	1370	7.9	1.62	0.0	5/100	41/212	–	–	

Mold to width available in: 229 mm (9.0 in)

■ BK (Black), ■ BL (Blue), ■ LG (Light gray), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-0 NSK2 | 0% Opening | Non skid (Design 2)

Closed surface | Non skid surface for increased safety when walking on belt | Uninterrupted NSK-structure across the full belt width

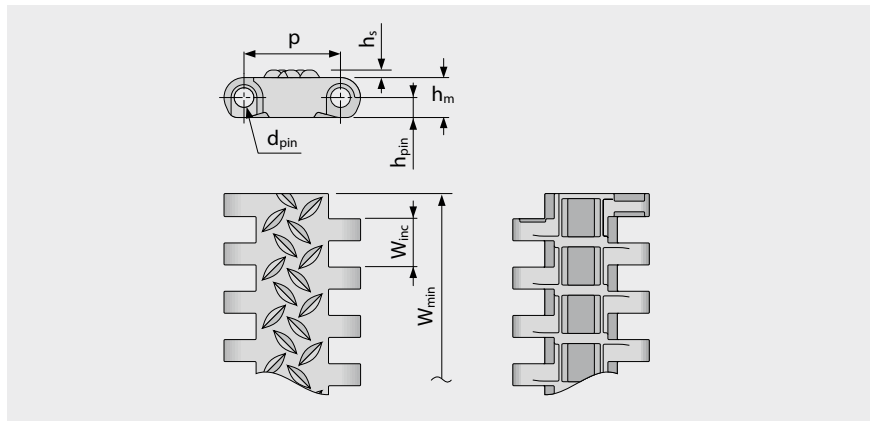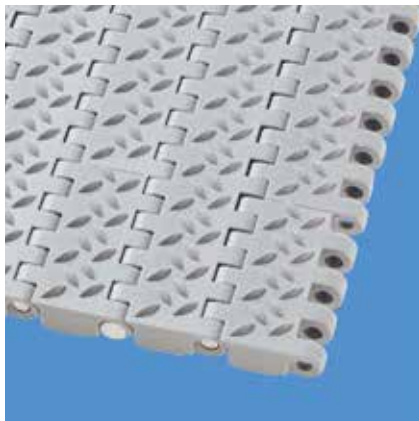

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	2.0	38.1	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.08	1.5	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	LG	PP	WT	20	1370	7.1	1.45	0.0	5/100	41/212	●	●	●

Mold to width available in: 229 mm (9.0 in)

■ LG (Light gray), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS






# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-25 RAT | 25 % Opening | Radius top

Open area (25 %) with rounded contact surfaces | 24% contact area (Largest opening: 9.7 x 7 mm/0.38 x 0.28 in) | Radius top belt surface ensures minimum product contact and good release characteristics

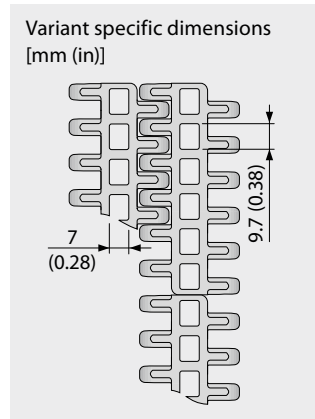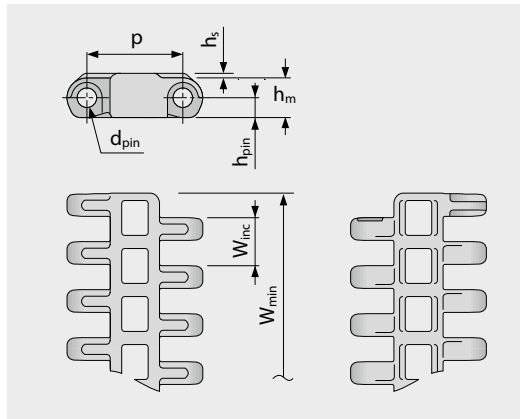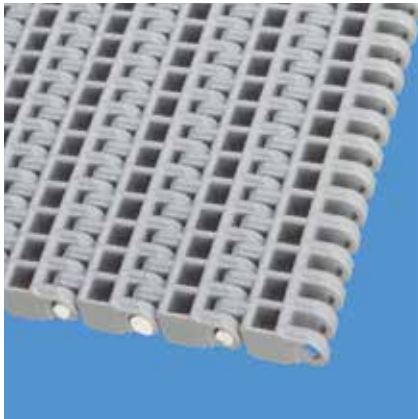

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	2.0	38.1	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.08	1.5	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	40	2741	9.7	1.99	-0.61	-45/90	-49/194	●	●	●
PP	LG	PP	WT	20	1370	6.4	1.31	0.0	5/100	41/212	●	●	●
PP	BL	PP	BL	20	1370	6.4	1.31	0.0	5/100	41/212	●	●	●
PA-HT	BK	PA-HT	BK	30	2056	9.8	2.01	1.53	-30/155	-22/311	–	–	

Mold to order belts													
PE		PE		15	1028	6.7	1.37	-0.31	-70/65	-94/149			

Mold to width available in: 76 mm (3.0 in), 152 mm (6.0 in), 229 mm (9.0 in)

■ BK (Black), ■ BL (Blue), ■ LG (Light gray), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-30 FLT | 30 % Opening | Flat top

Open version (30 %) | Flat top surface | 53 % contact area (Largest opening: 9.7 x 7 mm/0.38 x 0.28 in) | Smooth surface

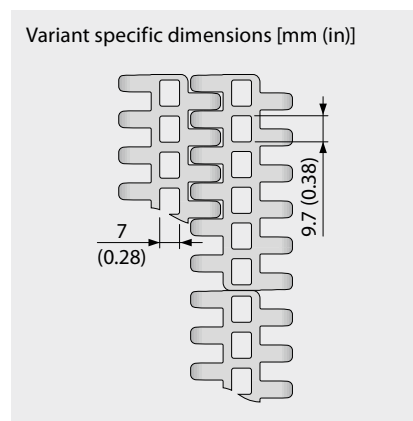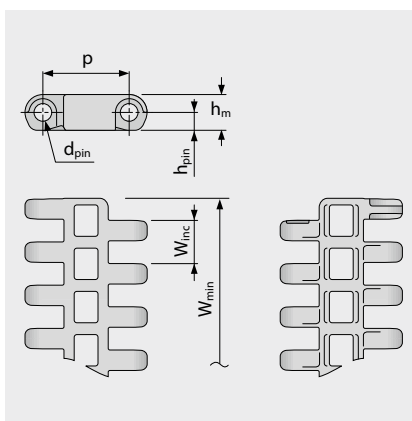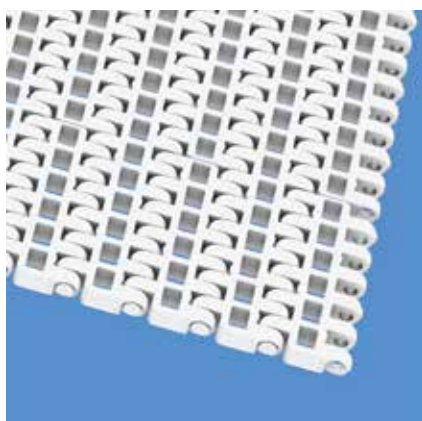

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	0.0	76.2	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.0	3.0	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	40	2741	9.0	1.84	-0.58	-45/90	-49/194	●	●	●
PP	BL	PP	BL	20	1370	5.8	1.19	0.0	5/100	41/212	●	●	●
PP	WT	PP	WT	20	1370	5.8	1.19	0.0	5/100	41/212	●	●	●
Mold to order belts													
PE	BL	PE	UC	15	1028	6.1	1.25	-0.31	-70/65	-94/149	●	●	●

Mold to width available in: 76 mm (3.0 in), 191 mm (7.5 in)

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8-0 FRT1 | 0% Opening | Friction top (Design 1)

Closed surface | Friction top with cube-shaped High Grip pads | Grooves inbetween to improve flexibility and to channel dirt away from the friction surface

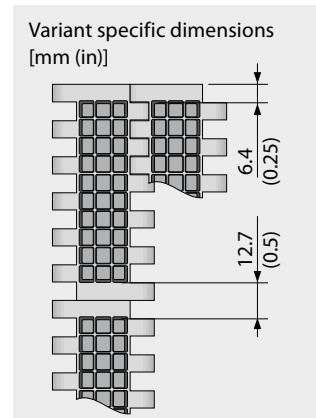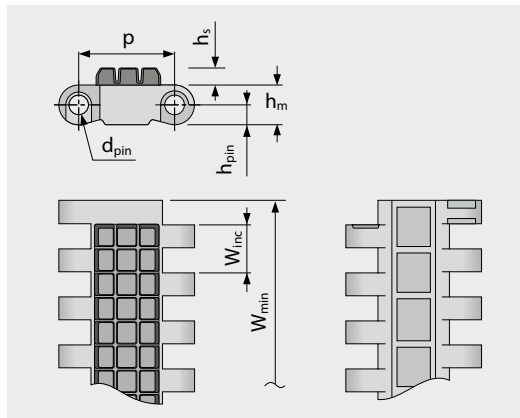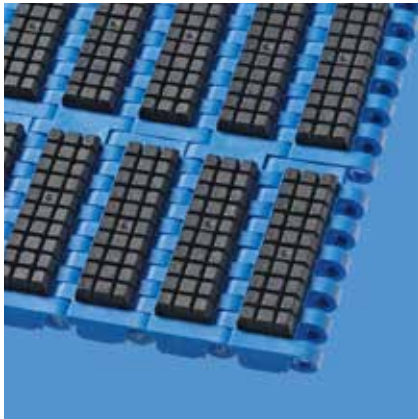

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	4.5	76.2	76.2	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.18	3.0	3.0	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	R6	BK	40	2741	17.7	3.63	-0.31	-45/60	-49/140	–	–	
POM	AT	PBT	BL	R6	BK	40	2741	17.7	3.63	-0.31	-45/60	-49/140	–	–	
PP	LG	PP	WT	R7	BK	20	1370	12.6	2.58	0.0	5/100	41/212	●	●	
PP	BL	PP	BL	R4	BG	20	1370	12.6	2.58	0.0	5/100	41/212			

Mold to order belts														
PP	BL	PP	BL	R7	BG	20	1370	12.6	2.58	0.0	5/100	41/212	●	●

Mold to width available in: 229 mm (9.0 in)

■ AT (Anthracite), ■ BG (Beige), ■ BK (Black), ■ BL (Blue), ■ LG (Light gray), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8-0 RTP A90 | 0% Opening | Roller top · A90

Closed surface with roller top at 90° to the direction of travel | version for low-friction merging of products lateral

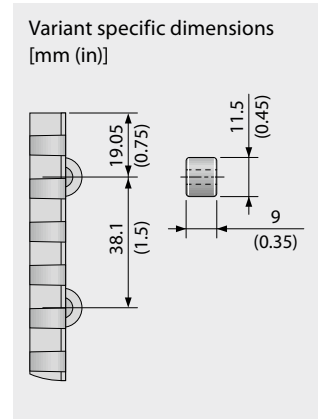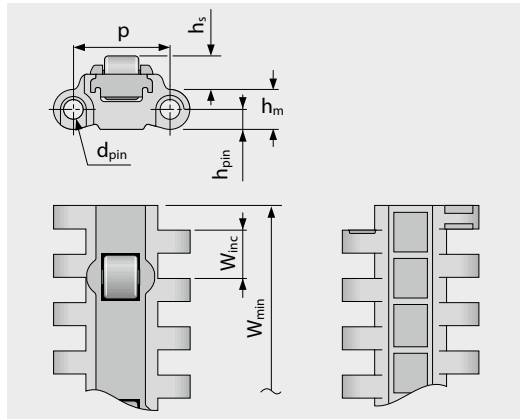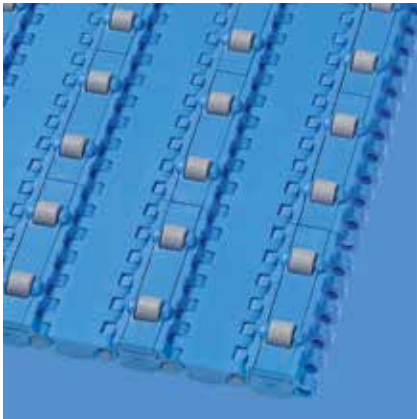


### Belt dimensions


	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	8.8	228.6	76.2	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.35	9.0	3.0	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>


Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	20	1370	14.3	2.93	-0.31	-45/90	-49/194	●	●	●

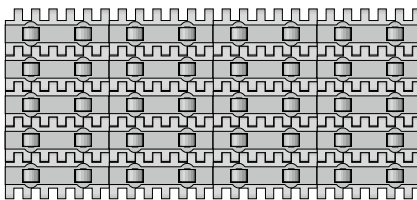

Standard configuration

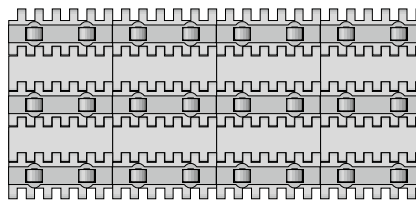

Configuration 1

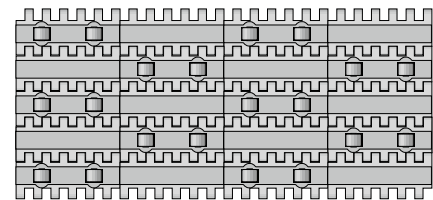

Configuration 2

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 8 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-30 FLT GT | 30 % Opening | Flat top · Guiding Tabs

Open version (30 %) | Flat top surface | 53 % contact area (Largest opening: 9.7 x 7 mm/0.38 x 0.28 in) | Smooth surface | with guiding tabs for tracking of chain on long hygiene critical conveyors

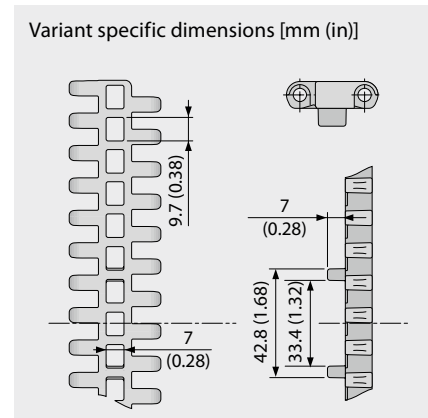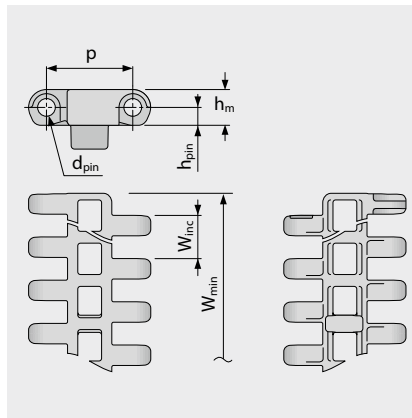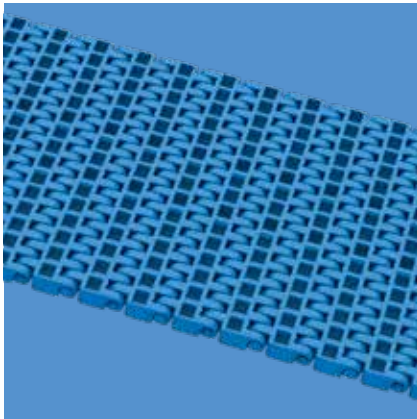

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.5	5.3	0.0	191.0	0.0	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.41	0.21	0.0	7.52	0.0	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	BL	40	2741	9.1	1.86	-0.58	-45/90	-49/194	●	●	●
Mold to order belts													
PE	BL	PE	UC	15	1028	6.1	1.25	-0.31	-70/65	-94/149	●	●	●
PP	BL	PP	BL	20	1370	5.9	1.21	0.0	5/100	41/212	●	●	●
PP	WT	PP	WT	20	1370	5.9	1.21	0.0	5/100	41/212	●	●	●



Standard belt configuration (bottom side)  
GT on every row

Mold to width available in: 191 mm (7.5 in)

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 8 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8 SPR | Sprockets

Deep tooth engagement for heavy loads

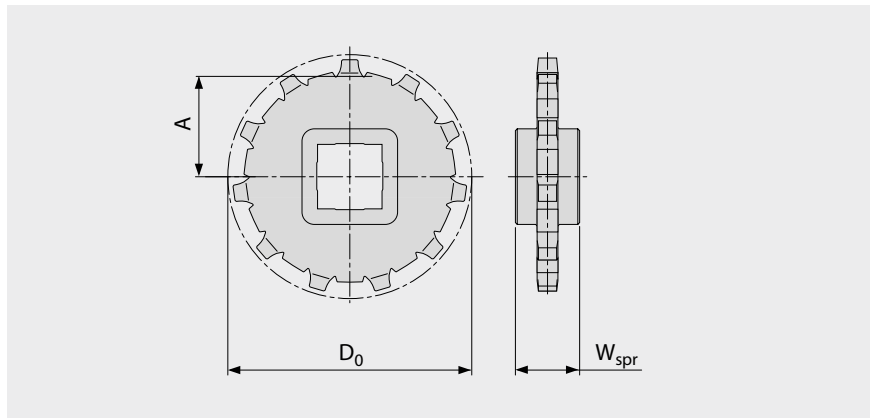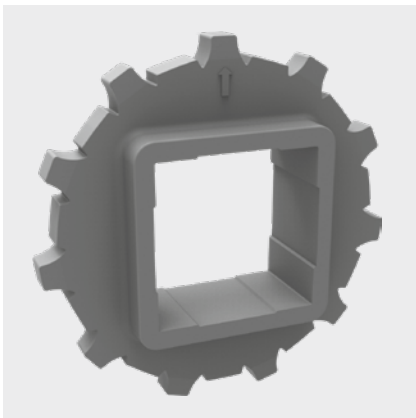

### Main dimensions

Sprocket size (Number of teeth)		Z11	Z12	Z15	Z18	Z19	Z22
W <sub>spr</sub>	mm	25.0	25.0	25.0	25.0	25.0	25.0
	inch	0.98	0.98	0.98	0.98	0.98	0.98
D <sub>0</sub>	mm	90.2	99.5	122.7	148.5	155.7	181.2
	inch	3.55	3.92	4.83	5.85	6.13	7.13
A <sub>max</sub>	mm	39.9	44.5	56.1	69.0	72.6	85.4
	inch	1.57	1.75	2.21	2.72	2.86	3.36
A <sub>min</sub>	mm	38.3	43.0	54.9	68.0	71.6	84.5
	inch	1.51	1.69	2.16	2.68	2.82	3.33

### Shaft bores (● = Round, ■ = Square)

30	mm	●	●	●	●		
40	mm	■	■	● / ■	■	■	
60	mm			■		■	
50	mm						■
80	mm					■	
1	inch		●			●	
1.25	inch		●			●	
1.5	inch	● / ■	■	■		■	
2	inch				●		
2.5	inch					■	

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 8 | SPLIT SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8 SPR-SP | Split Sprockets

Easy assembly without dismounting shaft | Deep tooth engagement for heavy loads

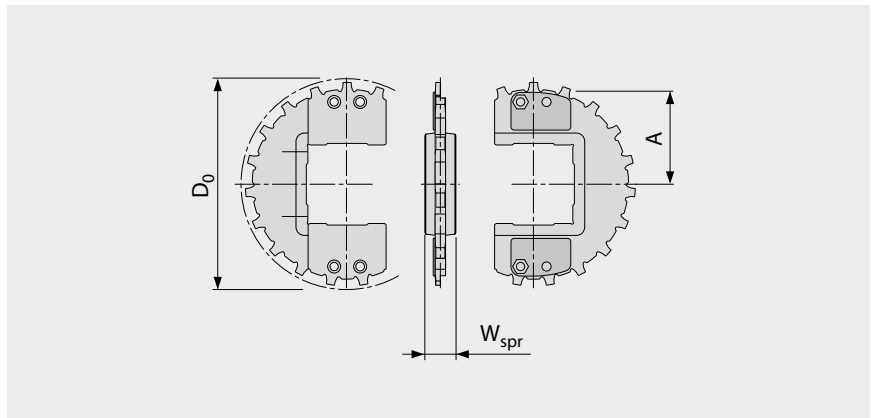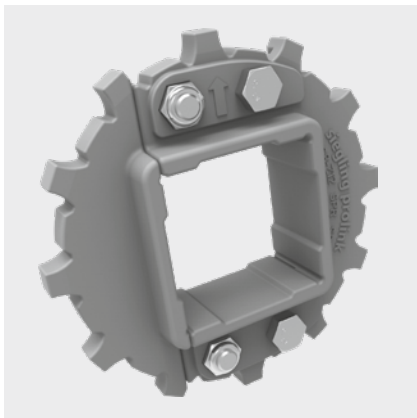

### Main dimensions

Sprocket size (Number of teeth)		Z12	Z16	Z19	Z21	Z22
W <sub>spr</sub>	mm	25.0	25.0	25.0	25.0	25.0
	inch	0.98	0.98	0.98	0.98	0.98
D <sub>0</sub>	mm	99.5	132.2	155.7	172.9	181.2
	inch	3.92	5.20	6.13	6.81	7.13
A <sub>max</sub>	mm	44.5	60.8	72.6	81.3	85.4
	inch	1.75	2.39	2.86	3.20	3.36
A <sub>min</sub>	mm	43.0	59.7	71.6	80.2	84.5
	inch	1.69	2.35	2.82	3.16	3.33

**Shaft bores** (● = Round, ■ = Square; ○ or □ = mold to order)

40	mm	■	● / ■	● / ■	■	
60	mm		● / ■	● / ■	■	
90	mm					■
1	inch	●				
1.5	inch	■	● / ■	● / ■	■	
2.5	inch		○ / ■	● / ■	■	

Material: PA, Color: LG

Mold to order: Material: PP, Color: WT

■ LG (Light gray), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS




# SERIES 8 | PROFILES

Straight running belt | Pitch 25.4 mm (1 in)

siegling prolink  
modular belts

## S8-0 FLT PMU


Profiles with reinforced base to handle high loads

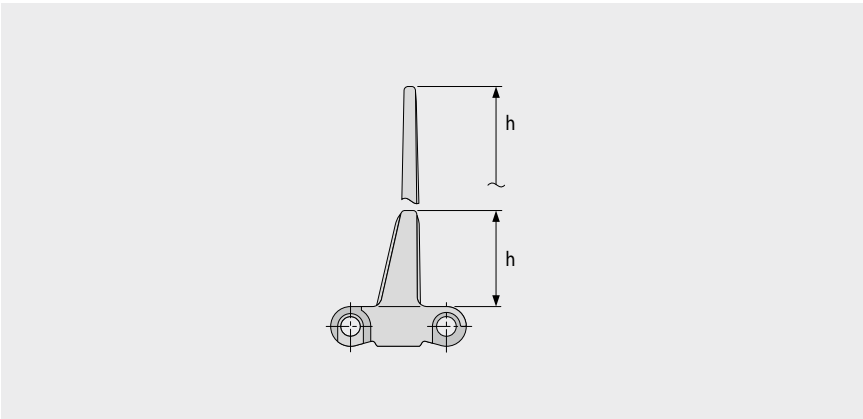

### Basic data

Material	Color	Height (h)	
		25.4 mm 1 inch	76 mm 3 inch
POM	BL	●	●
POM-CR	AT	●	●
PP	BL	●	●
PP	LG	●	●
PP	WT	●	●

Molded width: 152 mm (6.0 in)

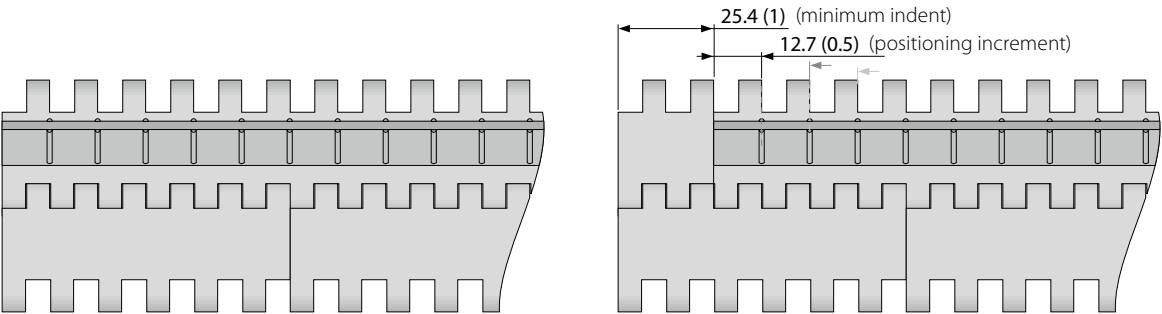

Standard configuration S8-0 FLT PMU

Indent configuration S8-0 FLT PMU

■ AT (Anthracite), ■ BL (Blue), ■ LG (Light gray), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.





# SERIES 8 | PROFILES

**siebling prolink**  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8.1-0 NCL PMU


Highest available Profile for 1 in pitch belts. Extreme impact resistant with reinforced base and ribs in TPC1.

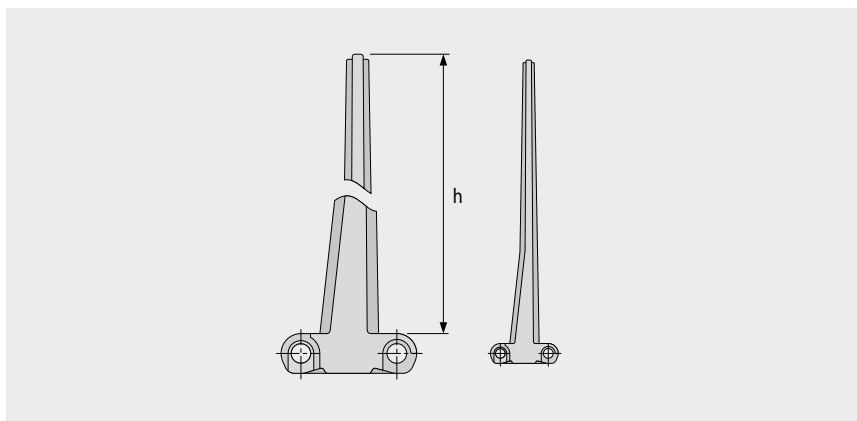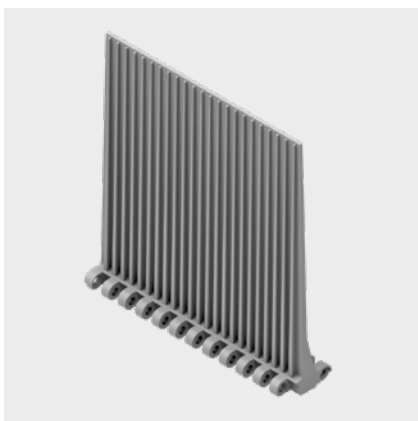


### Basic data

Material	Color	Height (h)
		152.4 mm 6 inch
TPC1	LG	●

Molded width: 152 mm (6.0 in)

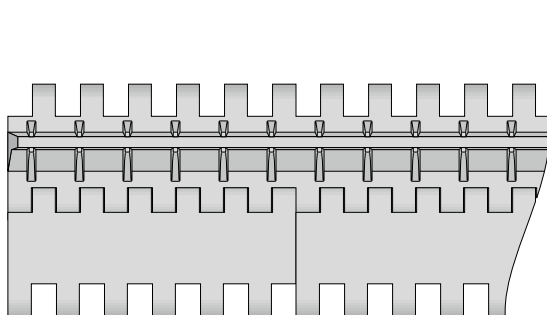

Standard configuration 8.1-0 NCL PMU

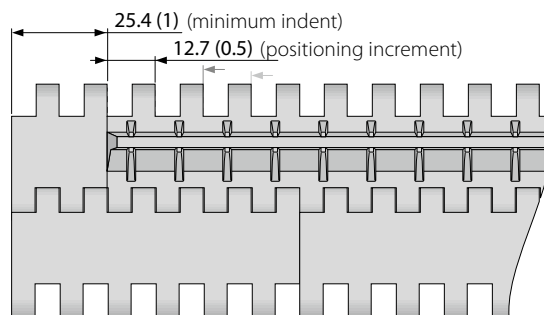

Indent configuration S8.1-0 NCL PMU

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 8 | SIDE GUARDS

Straight running belt | Pitch 25.4 mm (1 in)

siegling prolink  
modular belts


## S8 SG | Side guards

For retention of bulk products (for S8-0 FLT and S8.1-30 FLT only)

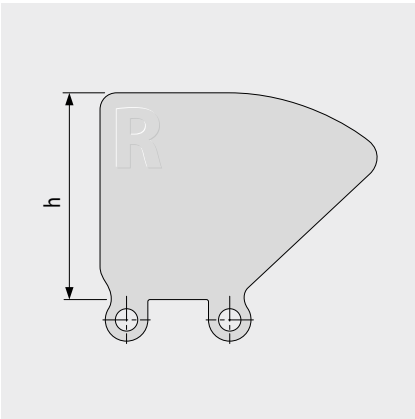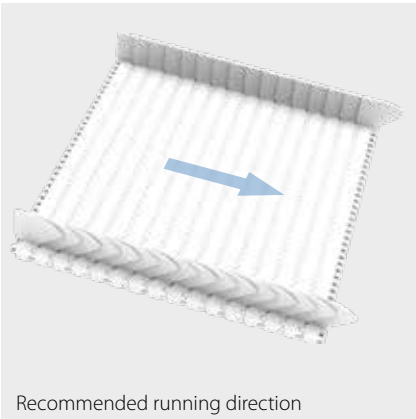

### Basic data

Material	Color	Height (h)			
		25 mm 1 inch	50 mm 2 inch	75 mm 3 inch	100 mm 4 inch
PE	LB	●	●	●	●
PE	WT	●	●	●	●
PE-MD	BL	●	●		
PP	LB	●	●	●	●
PP	WT	●	●	●	●

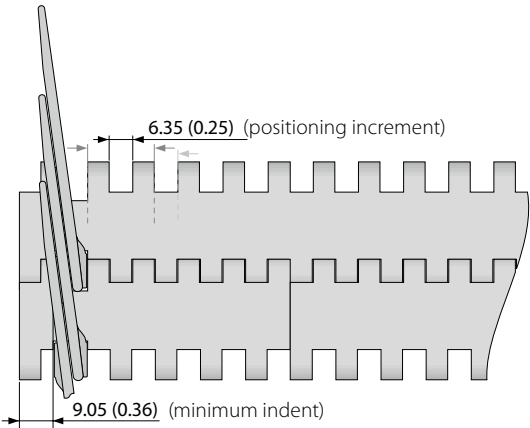

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS


# SERIES 8 | HOLD DOWN TABS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S8 HDT | Hold Down Tabs

Used on wider belts to prevent lift an swan neck conveyors | To improve strength, stability and cleanability they are moulded on a narrow module

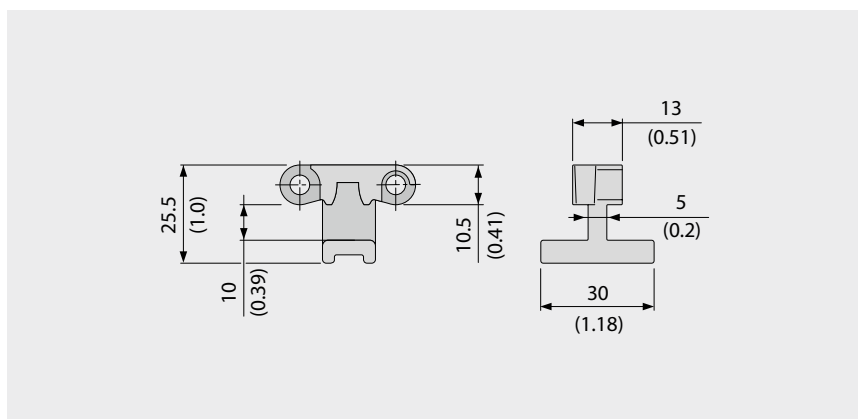


### Basic data

Material	Color
POM	BL

Using Hold Down Tabs results in constraints with regards to sprocket and shaft size to ensure sufficient clearance to the shaft (see also chapter 3.3 hold down tabs).

### Example

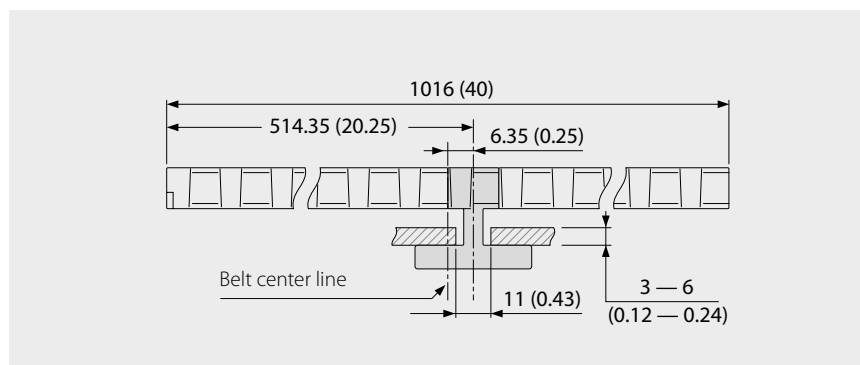

### Sprocket options using HDT

Sprocket size (Number of teeth)	Maximum bore round		Maximum bore square	
	[mm]	[inch]	[mm]	[inch]
Z11	40	1.5	30	1.25
Z12	45	1.75	35	1.5
Z15	70	2.75	55	2.0
Z18	95	3.5	70	2.75
Z19	100	3.75	75	3.0

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 8 | PRR

Straight running belt | Pitch 25.4 mm (1 in)

**siegling prolink**  
modular belts

## S8.1 PRR | Pin Retained Rollers

For applications where low back pressure accumulation or product separation is required

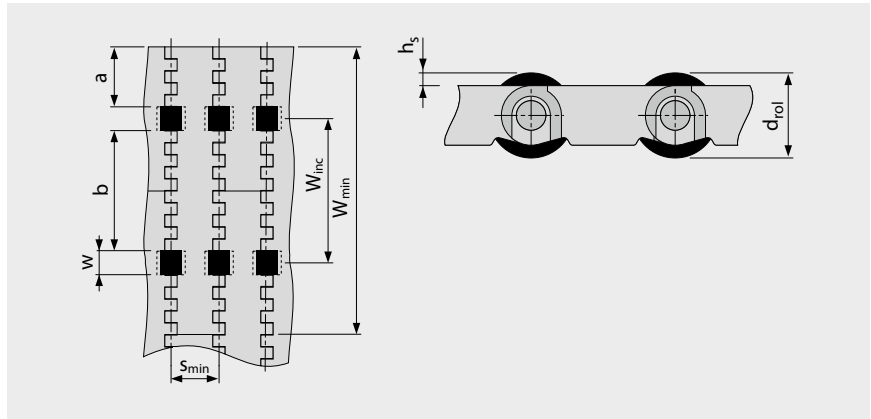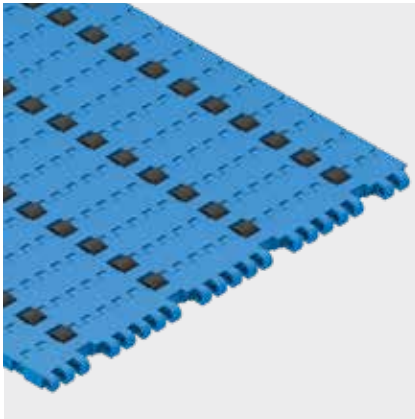

- For low back pressure wearstrips are to be positioned between the rollers
- For product separation the wearstrips are to be positioned below the rollers
- For all materials and surfaces
- Rollers available in POM BK and TPE LG (R10)

### Dimensions

w	12.7 mm (0.5 in)	Roller cut out width (roller width 12 mm (0.47 in))
h <sub>s</sub>	2.25 mm (0.09 in)	Height of rollers above surface
d <sub>rol</sub>	15 mm (0.59 in)	Roller diameter
a	31.75 mm (1.25 in)	Minimum indent
b	63.5 mm (2.5 in)	Standard distance between rollers across belt width
s	n × S <sub>min</sub>	Roller spacing in travel direction (standard: n = 1)
S <sub>min</sub>	25.4 mm (1.0 in)	Min. roller spacing in travel direction
W <sub>inc</sub>	76.2 mm (3.0 in)	Width increment
W <sub>min</sub>	152.4 mm (6.0 in)	Min. belt width
W <sub>B</sub>		Belt width
n <sub>rol</sub>		Number of rollers across belt width

### Allowable belt pull

To determine admissible belt pull calculate effective belt width  $W_{B,ef}$  by

$$W_{B,ef} = W_B - (w \times n_{rol})$$

Example:

$$W_B = 228.6 \text{ mm (9.0 in); } w = 12.7 \text{ mm (0.5 in); } n_{rol} = 3$$

$$W_{B,ef} = 228.6 - (12.7 \times 3) = 190.5 \text{ mm}$$

$$W_{B,ef} = 9.0 - (0.5 \times 3) = 7.5 \text{ in}$$

Note: Sprocket must not be placed inline with rollers. Deviation in roller spacing possible, please get in contact to customer service. Coefficient of friction between belt and conveyed product in accumulation mode  $\mu_{acc} = 0.04$ , i.e. the accumulation pressure is approx. 4% of the weight of the backed up product.

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 9**

Side flexing and spiral belts  
Pitch 50 mm (1.97 in)

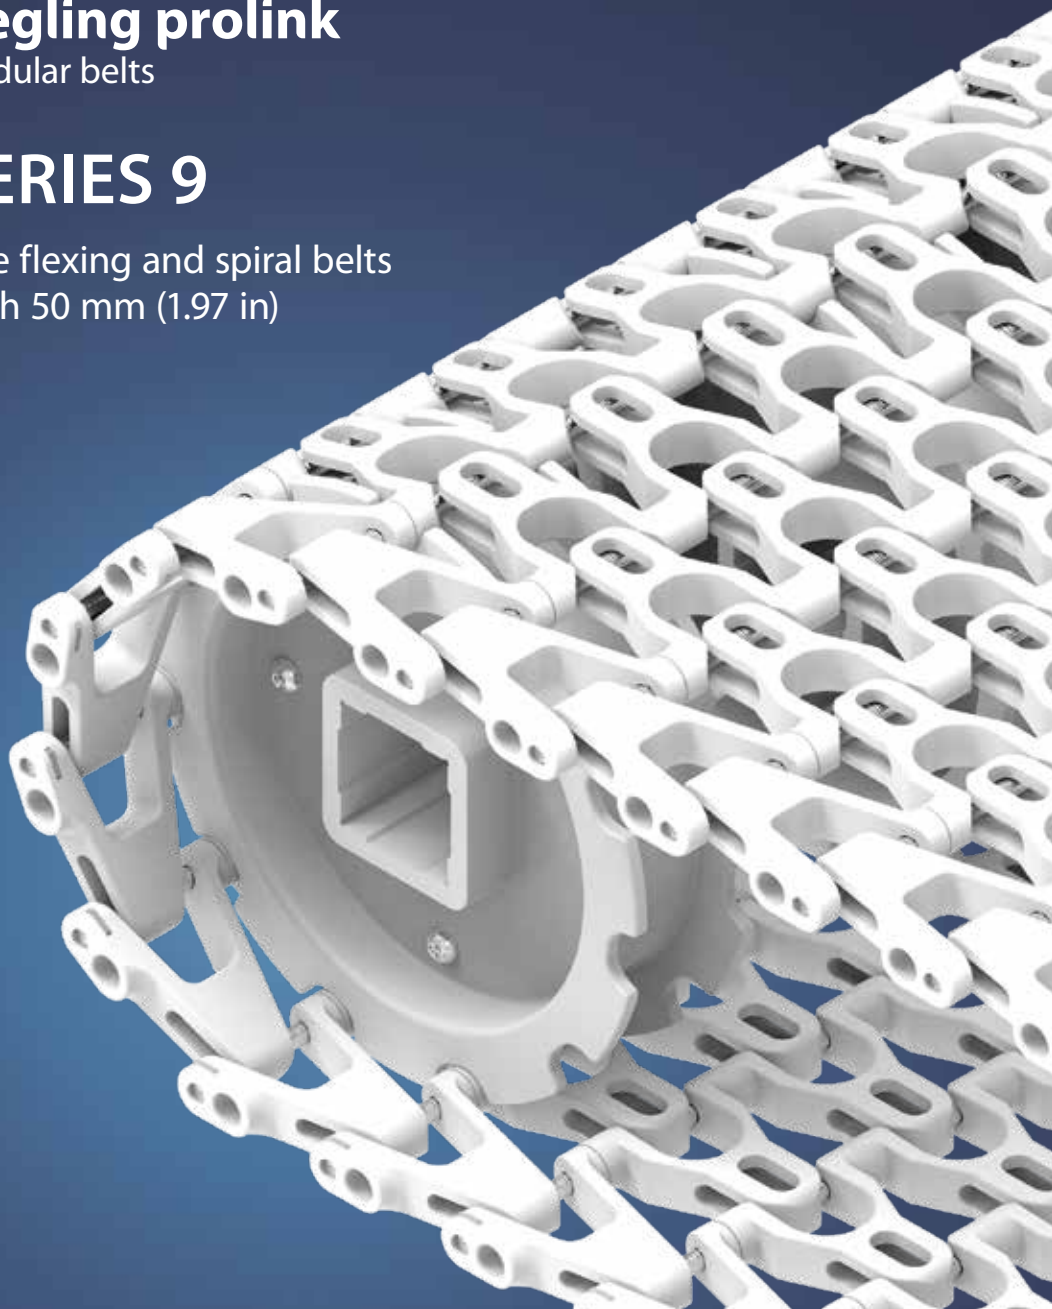


# SERIES 9 | OVERVIEW

**siegling prolink**  
modular belts

Side flexing and spiral belts | Pitch 50 mm (1.97 in)

Belts for medium to heavy-duty food and non-food applications

Side view scale 1:1

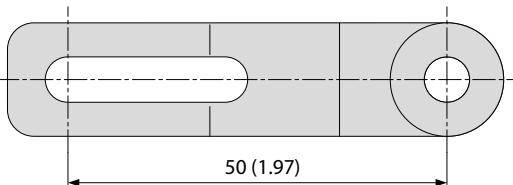


## Design characteristics

- Suitable for both straight and radius conveying
- 57 % open area for excellent air circulation and drainage
- Stainless steel hinge pins for high load capacity, lateral stiffness, less belt supports and minimum belt lifting in curves
- No potential belt edge catch points due to safe fixing of hinge pin

## Basic data

Pitch	50 mm (1.97 in)
Belt width min.	100 mm (3.9 in)
Width increments	50 mm (1.97 in)
Hinge pins	6 mm (0.24 in) made of stainless steel

Available surface pattern and opening area

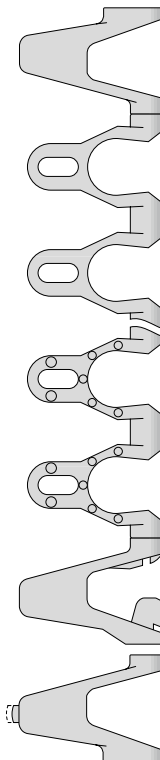

### S9-57 GRT

Open (57 %), lattice-shaped surface

### S9-57 NTP

Open (57 %), lattice-shaped surface with nub top

### Guided belts

### Longer side modules

## Attention:

Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

## Sprockets

in different sizes with round or square bore



## Profiles

in different heights and designs for inclines



## Side guards

in different heights for retention of bulk products



## Self stacker

in different heights for spiral applications








# SERIES 9 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1.8$

## S9-57 GRT | 57 % Opening | Grid top

Open area (57 %) for excellent air circulation and drainage | 31 % contact area (Largest opening:  $\varnothing = 24.3$  mm/0.96 in) | Lattice-shaped surface | Collapse factor ( $C_c$ ) = 1.8

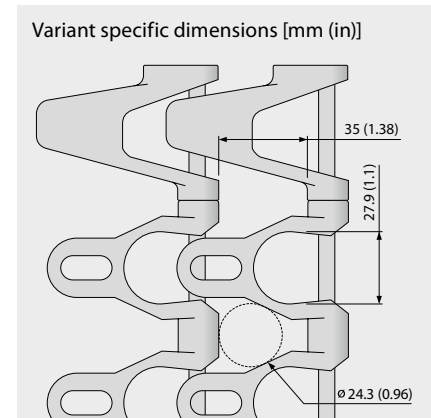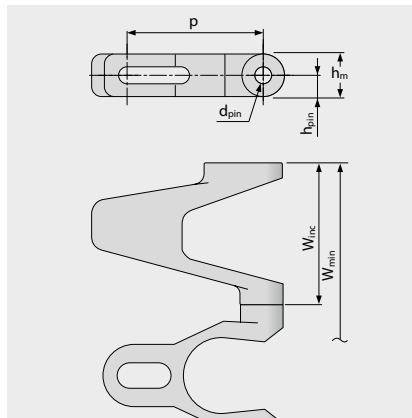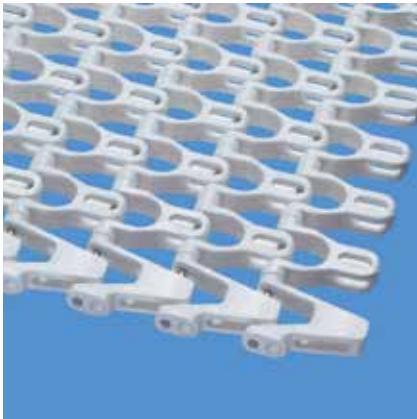

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	0.0	150.0	50.0	±0.3	1.8 x W <sub>B</sub>	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.0	5.91	1.97	±0.3	1.8 x W <sub>B</sub>	1.97	3.94	5.91	1.97

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	SS	12	822	NR	NR	9.5	1.95	0.0	-70/65	-94/149	●	●	●
PP	WT	SS	22	1507	1600	360	9.3	1.9	0.0	5/100	41/212	●	●	●
PP	LG	SS	22	1507	1600	360	9.3	1.9	0.0	5/100	41/212	●	●	●
POM-CR	UC	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●
POM-CR	LG	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●
POM-CR	DB	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●
PA*	BL	SS	24	1645	2240	504	11.3	2.31	0.0	-40/120	-40/248	●	●	●

NR = not recommended

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ DB (Dark blue), ■ LG (Light gray), □ WT (White), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 9 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1.8$

## S9-57 NTP | 57 % Opening | Nub top (round studs)

Open area (57 %) for excellent air circulation and drainage | Lattice-shaped surface with 3.0 mm (0.12 in) high round studs  
4 % contact area (Largest opening:  $\varnothing = 24.3$  mm/0.96 in) | Nub top surface for increased grip and reduced contact area for good release | Collapse factor ( $C_c$ ) = 1.8

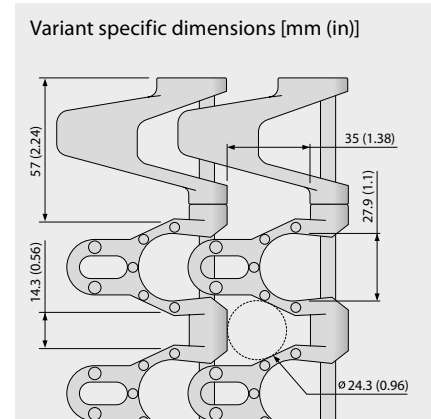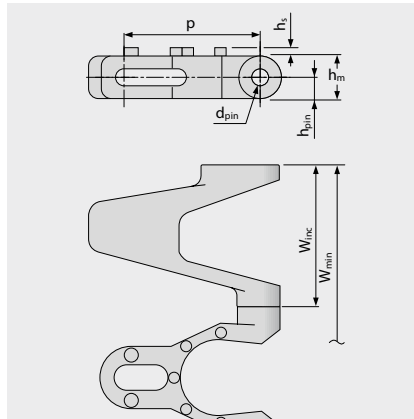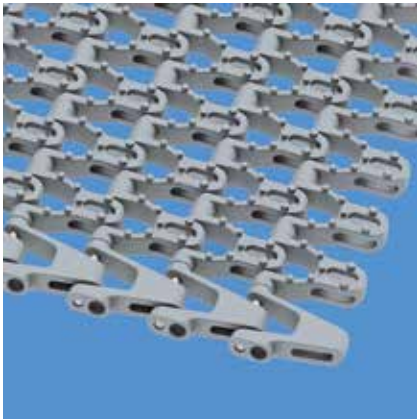

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>5</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	3.0	150.0	50.0	$\pm 0.3$	$1.8 \times W_B$	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.12	5.91	1.97	$\pm 0.3$	$1.8 \times W_B$	1.97	3.94	5.91	1.97

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	LG	SS	22	1507	1600	360	9.4	1.93	0.0	5/100	41/212	●	●	●
Mold to order belts														
PE		SS	12	822	NR	NR	9.7	1.99	0.0	-70/65	-94/149			
POM-CR		SS	30	2056	2800	629	11.7	2.4	0.0	-45/90	-49/194			

NR = not recommended

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 9 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1.8$

## S9-57 GRT G | 57 % Opening | Grid top · guided

Open area (57 %) for excellent air circulation and drainage | 31 % contact area (Largest opening:  $\varnothing = 24.3$  mm/0.96 in) | Lattice-shaped surface | Guided version (G) allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 1.8

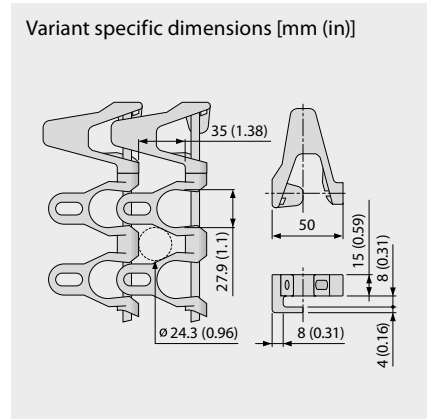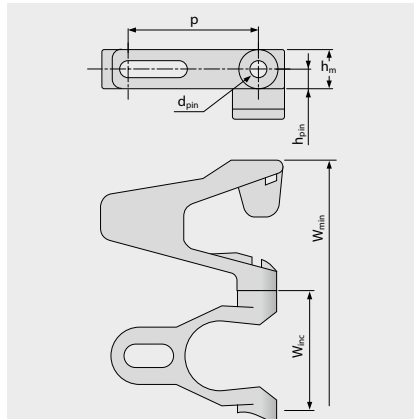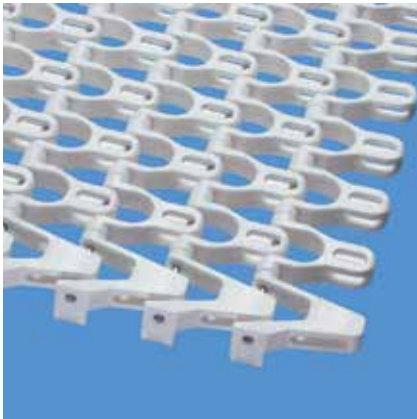

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	0.0	150.0	50.0	±0.3	1.8 x W <sub>B</sub>	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.0	5.91	1.97	±0.3	1.8 x W <sub>B</sub>	1.97	3.94	5.91	1.97

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	UC	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●
Mold to order belts														
PE		SS	12	822	NR	NR	9.5	1.95	0.0	-70/65	-94/149			

NR = not recommended

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ LG (Light gray), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 9 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1.8$

## S9-57 NTP G | 57 % Opening | Nub top (round studs) · guided

Open area (57 %) for excellent air circulation and drainage | With round studs for increased grip (4 % contact area, largest opening:  $\varnothing = 24.3$  mm/0.96 in) | Guided version (G) allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 1.8

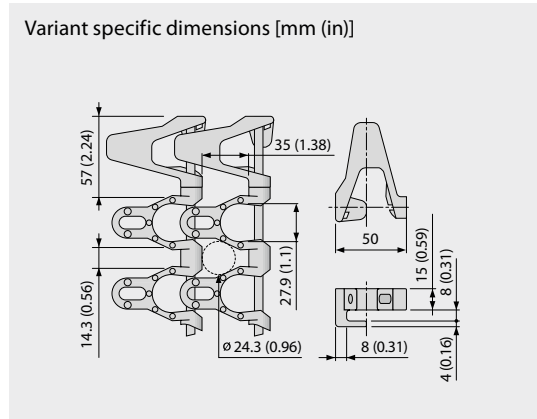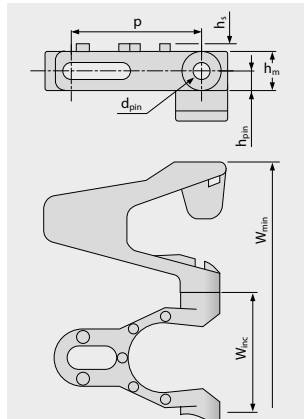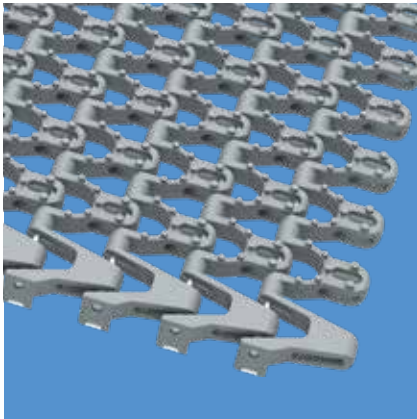

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	3.0	150.0	50.0	±0.3	1.8 x W <sub>B</sub>	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.12	5.91	1.97	±0.3	1.8 x W <sub>B</sub>	1.97	3.94	5.91	1.97

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	LG	SS	22	1507	1600	360	9.4	1.93	0.0	5/100	41/212	●	●	●

Mold to order belts													
PE		SS	12	822	NR	NR	9.7	1.99	0.0	-70/65	-94/149		
POM-CR		SS	30	2056	2800	629	11.7	2.40	0.0	-45/90	-49/194		

NR = not recommended

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 9 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9-57 GRT F2, F3, F4, F5, F6, F7, F8 | 57 % Opening

Open area (57 %) for excellent air circulation and drainage (Largest opening:  $\varnothing = 24.3$  mm/0.96 in) | Special edge modules with noses (F2–F8) of varying size ensure smooth belt operation when the system turn radius is greater than the minimum belt turn radius | Collapse factor ( $C_c$ ) = 2.12 – 5.50

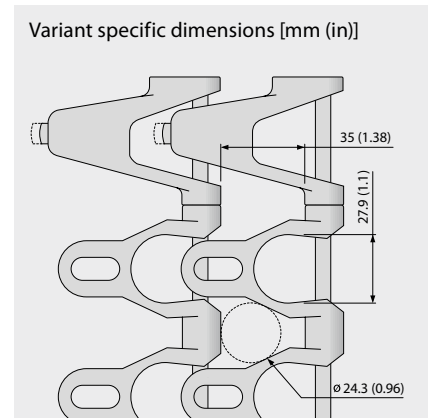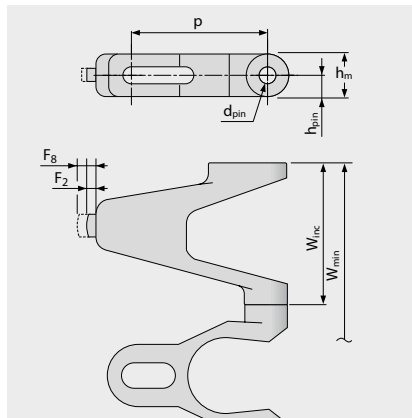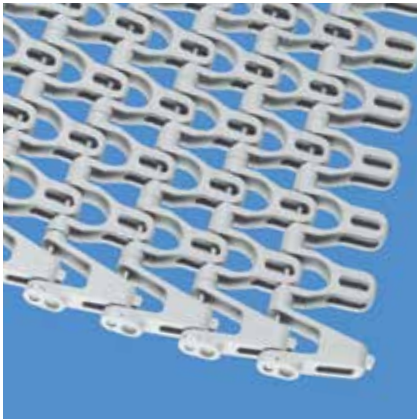

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	0.0	150.0	50.0	±0.3	C <sub>c</sub> x W <sub>B</sub>	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.0	5.91	1.97	±0.3	C <sub>c</sub> x W <sub>B</sub>	1.97	3.94	5.91	1.97

W<sub>B</sub> = Belt width. C<sub>c</sub> see table below

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	UC	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●

Mold to order belts													
PE		SS	12	822	NR	NR	9.5	1.95	0.0	-70/65	-94/149		
PP		SS	22	1507	1600	360	9.3	1.9	0.0	5/100	41/212		

### Module variants

Module	F2	F3	F4	F5	F6	F7	F8
C <sub>c</sub>	2.12	2.40	2.65	3.0	3.68	4.58	5.50

For further information see chapter 3.3  
(paragraph spiral conveyors)

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

☐ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





MOVEMENT SYSTEMS

# SERIES 9 | SPROCKETS

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9 SPR | Sprockets

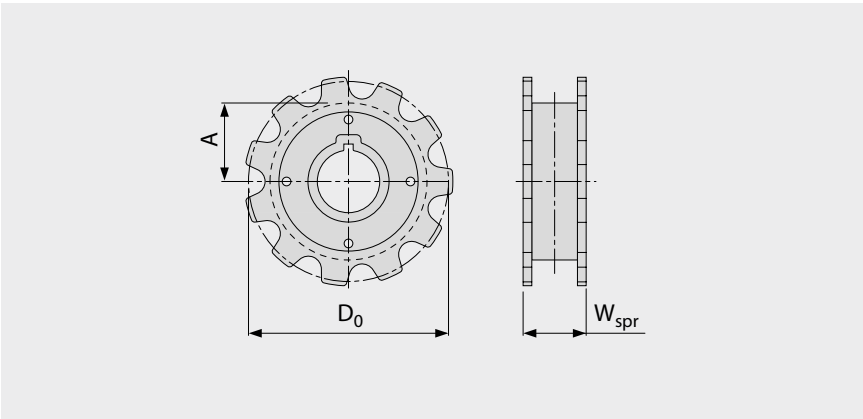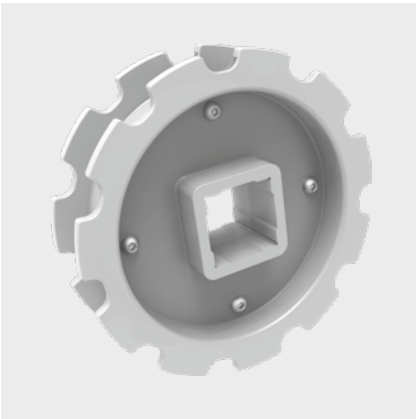

### Main dimensions

Sprocket size (Number of teeth)		Z11
W <sub>spr</sub>	mm	49.0
	inch	1.93
D <sub>0</sub>	mm	178.8
	inch	7.04
A <sub>max</sub>	mm	81.9
	inch	3.22
A <sub>min</sub>	mm	77.4
	inch	3.05

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

40	mm	● / ■
1.5	inch	□

Material: POM, Color: UC

□ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
For detailed sprocket and shaft dimensions see appendix 6.3  
Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 9 | PROFILES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9-57 GRT PMC


Open version (57 %) base module for drainage

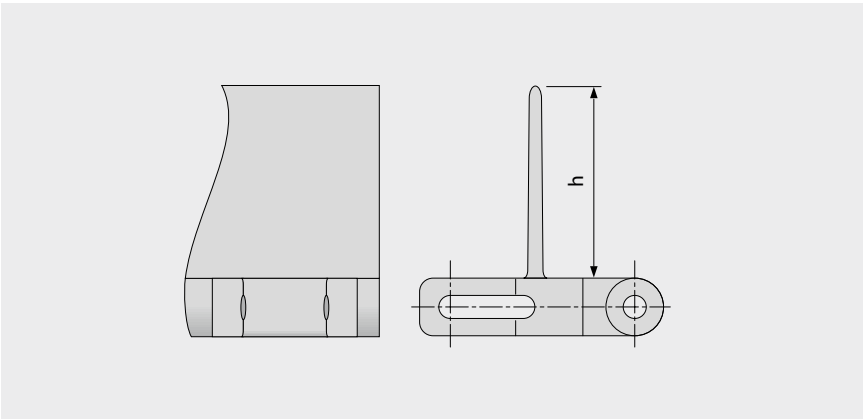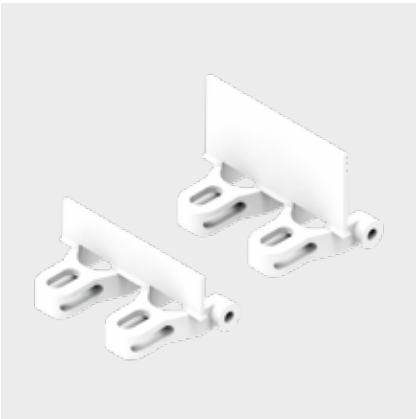

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
POM	UC	●	●
PP	WT	●	●

Molded width: 100 mm (3.9 in)

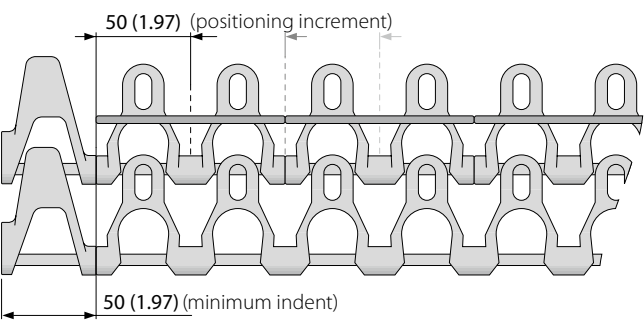

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

□ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS





# SERIES 9 | SIDE GUARDS

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1.8$


## S9 SG | Side guards

For retention of bulk products | Collapse factor ( $C_c$ ) = 1.8

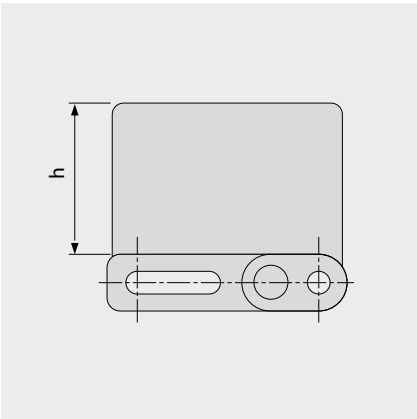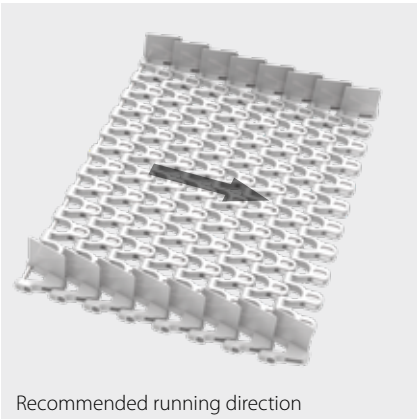

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
POM-CR	UC	●	●

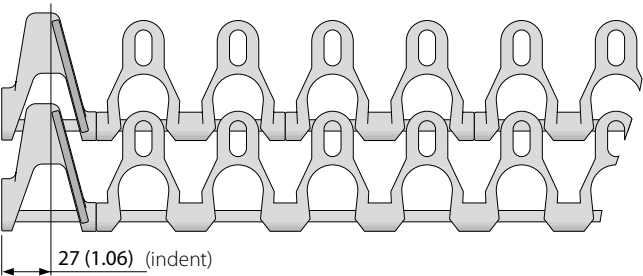

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

□ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS




# SERIES 9 | SELF STACKER

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9 SSL/R | Self Stacker

For spiral applications with limited space in height (SSL/R at curve inside/cage)

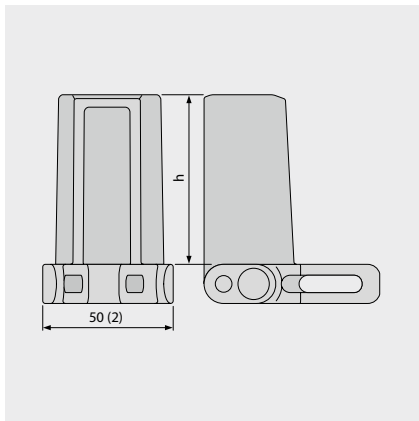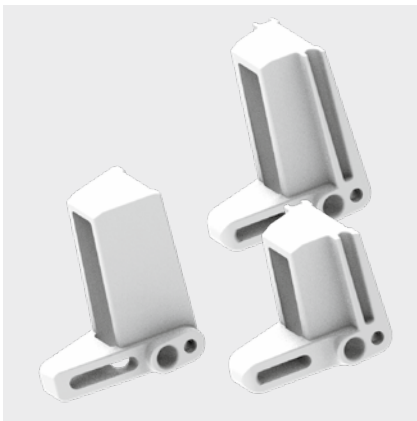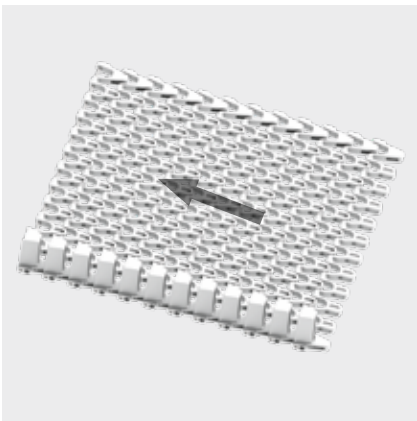


### Basic data

Material	Color	Height (h)	
		45 mm 1.8 inch	65 mm 2.6 inch
POM-CR	WT	●	●

Belt width [mm]	Side flexing (F x W <sub>B</sub> )	
	Factor 1.8	Factor 1.6*
< 300	1.6	1.4
300–800	1.7	1.5
> 800	1.8	1.6

\* 1.6 only in H65 mm available

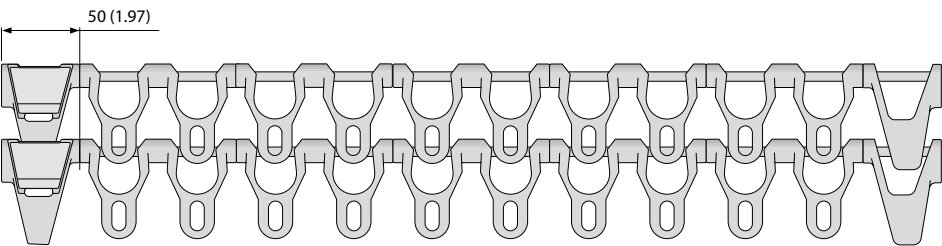

□ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS


# SERIES 9 | INSTALLATION NOTES

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## Preferred travel direction



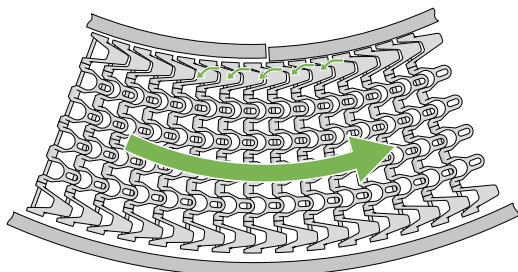


Curve conveyor



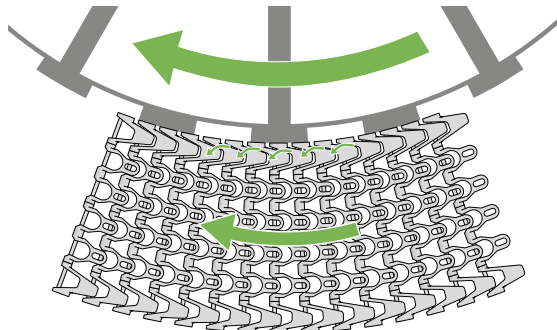


Cage driven spiral



## Curve direction S9 -> CW (ClockWise) and CCW (Counter ClockWise)

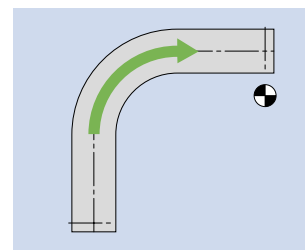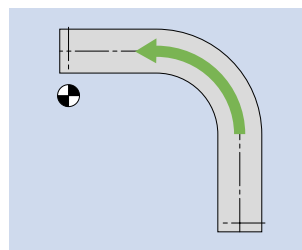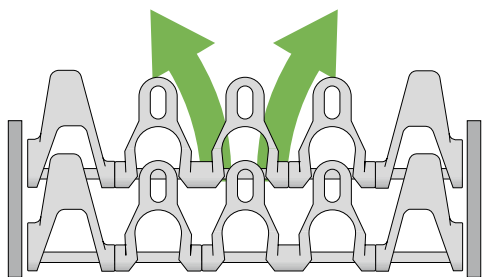

## Curve direction S9 - Spiral application -> CW (ClockWise) and CCW (Counter ClockWise)

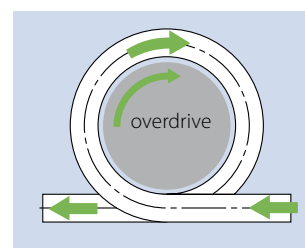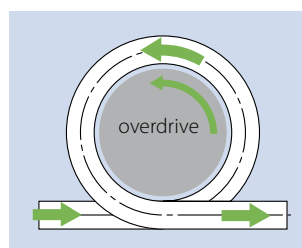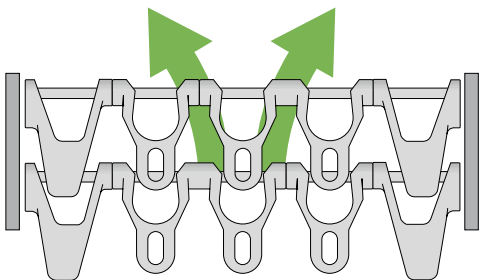

## Sprocket position

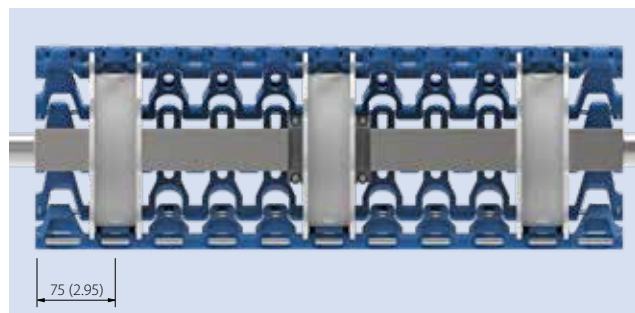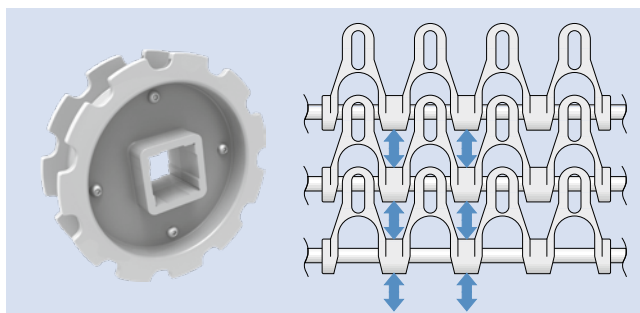


Further information in chapter 3 and 5

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 9.1**

Side flexing and spiral belts  
Pitch 50 mm (1.97 in)

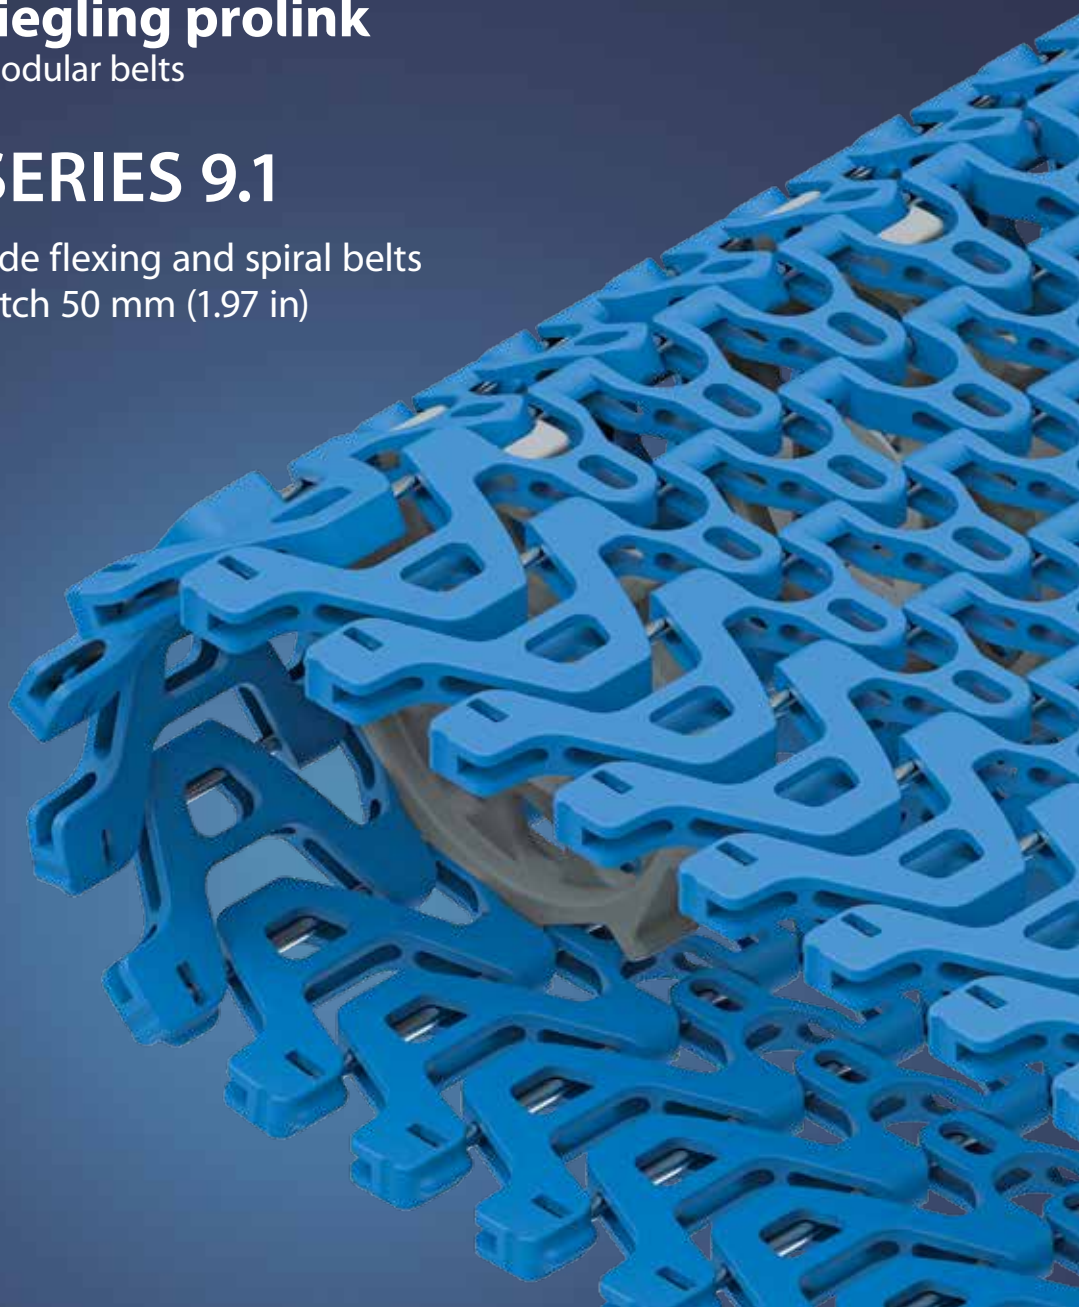


# SERIES 9.1 | OVERVIEW

siegling prolink  
modular belts

Side flexing and spiral belts | Pitch 50 mm (1.97 in)

Belts for medium to heavy-duty food and non-food applications

Side view scale 1:1

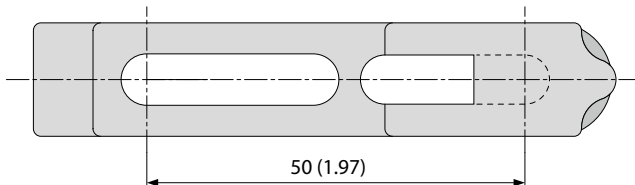


## Design characteristics

- Can be used in spiral towers with cage drives and for straight and radius conveying
- Strong side modules in a brick-laid pattern for exceptional tensile load
- Hinge pins with clip-free attachment
- Stainless steel hinge pins for high load capacity, lateral stiffness, less belt supports and minimum belt lifting in curves
- Adjustable collapse factor of 1.3 – 2.9

## Basic data

Pitch	50 mm (1.97 in)
Belt width min.	350 mm (13.78 in)
Width increments	50 mm (1.97 in)
Hinge pins	6 mm (0.24 in) made of stainless steel

Available surface pattern and opening area

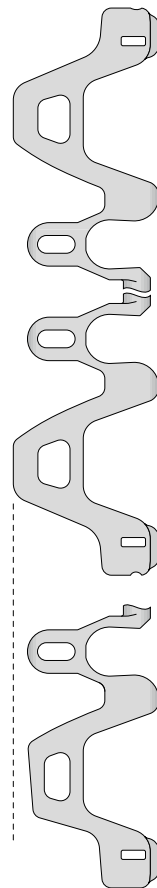

### S9.1-57 GRT SMU

Open area (57%),  
with grid top

### S9.1-57 GRT SMT

Open area (57%), grid top  
Can be used on the inner radius  
to decrease the collapse factor


## Attention:

Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

## Sprockets

Single row with round or square bore (for spiral towers with cage drives)

Double row with round or square bore


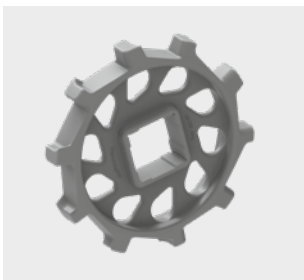


# SERIES 9.1 | BELT TYPES

Side flexing and spiral belt | Pitch 50 mm (1.97 in) |  $C_c = 1,3 - 2,9$

## S9.1-57 GRT (CW/CCW) | 57 % Opening | Grid top

Spiral belt | Open area (57 %) for excellent air circulation and drainage | Contact area 31 % (Largest opening:  $\varnothing = 24$  mm/ 0.94 in) | Lattice-shaped surface | Clip-free hinge pin fitting | Special edge modules (SMT) on the inner radius make the collapse factor adjustable ( $C_c = 1.3 - 2.9$ ) and ensure smooth conveying

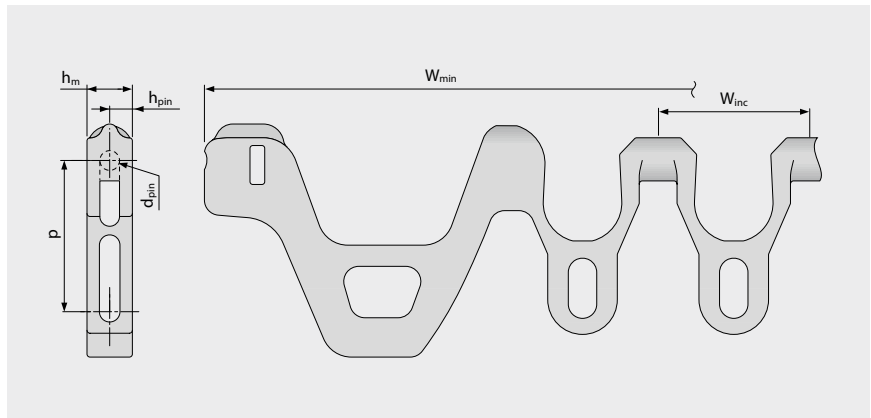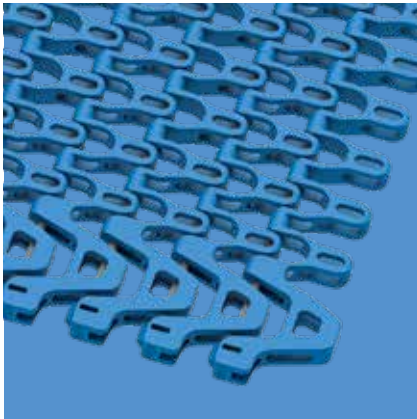

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	50.0	6.0	15.0	7.5	0.0	350.0	50.0	±0.3	C <sub>c</sub> x W <sub>B</sub>	50.0	100.0	150.0	50.0
inch	1.97	0.24	0.59	0.3	0.0	13.78	1.97	±0.3	C <sub>c</sub> x W <sub>B</sub>	1.97	3.94	5.91	1.97

W<sub>B</sub> = Belt width. C<sub>c</sub> see table on the following page

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	SS	30	2056	2800	629	11.5	2.36	0.0	-45/90	-49/194	●	●	●

More design information available in Chapter 3.3 and 5.2.

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370


● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



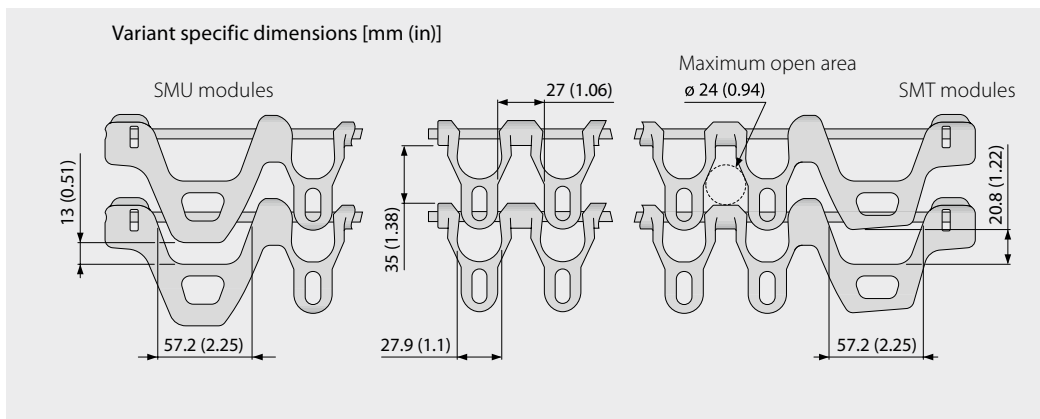


#### Module distribution on the inner radius for various collapse factors


S9.1 Collapse factor	Belt edge structure on the inner radius (row #)										% on the inner	
	1	2	3	4	5	6	7	8	9	10	% SMU	% SMT
1.3											0	100
1.4											10	90
1.5											20	80
1.6											25	75
1.7											33.33	66.67
1.8											40	60
1.9											50	50
2.1											60	40
2.2											66.66	33.34
2.4											75	25
2.5											80	20
2.7											90	10
2.9											100	0

■ S9.1 SMT (Side Module Tight)  
■ S9.1 SMU (Side Module Universal)


For further information on calculating the collapse factor, see page III-32.

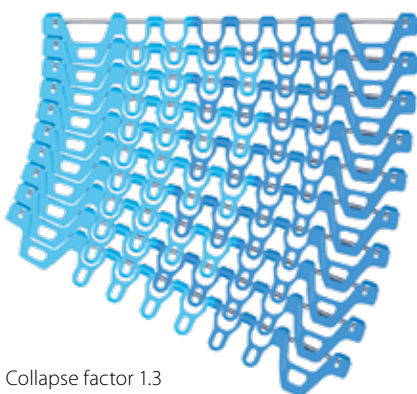

Collapse factor 1.3  
(for 100% SMT modules)

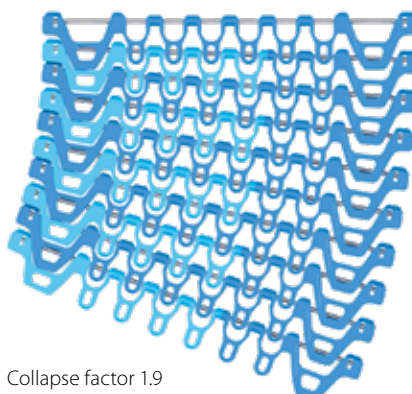

Collapse factor 1.9  
(for 50% SMT modules)

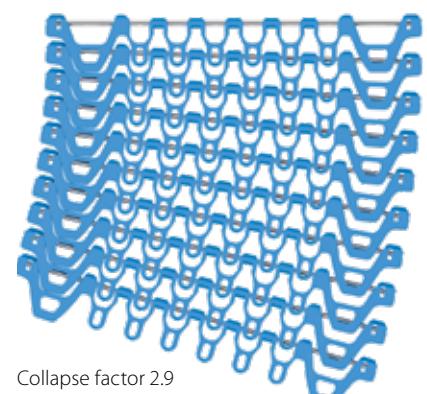

Collapse factor 2.9  
(for 0% SMT modules)





# SERIES 9.1 | SPROCKETS

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9 SPR | Sprockets

Single-row sprocket for series 9.1 and series 9 in spiral applications

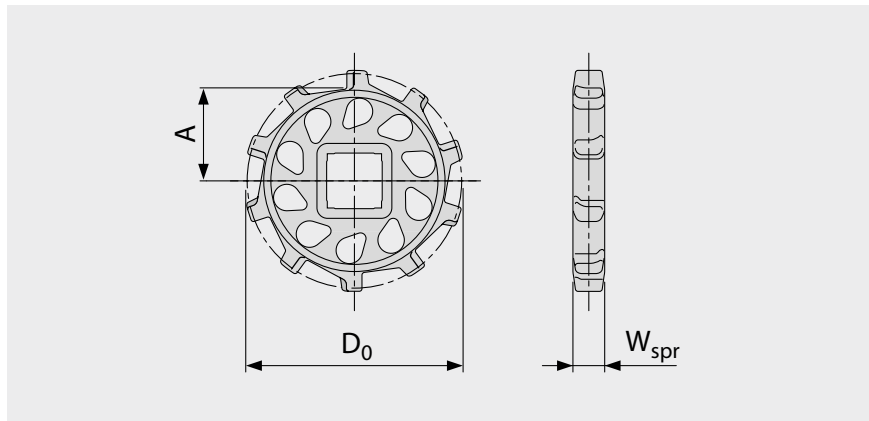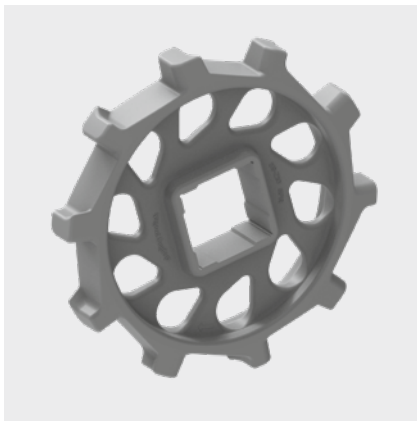

### Main dimensions

Sprocket size (Number of teeth)		Z10
W <sub>spr</sub>	mm	24.0
	inch	0.94
D <sub>0</sub>	mm	161.8
	inch	6.37
A <sub>max</sub>	mm	73.4
	inch	2.89
A <sub>min</sub>	mm	69.8
	inch	2.75

### Shaft bores (● = Round, ■ = Square)

40	mm	● / ■
1.5	inch	■
2.0	inch	●

### Recommended usage

Belt	Application	Recommended usage
S9.1-57 GRT	Straight/curved	This sprocket is not recommended
S9.1-57 GRT	Spiral tower with cage drive	Use in main conveying direction, only for a short time in the opposite direction and not under load

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 9 | SPROCKETS

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## S9 SPR DR | Sprockets

Double-row sprocket for series 9 and restricted use in series 9.1

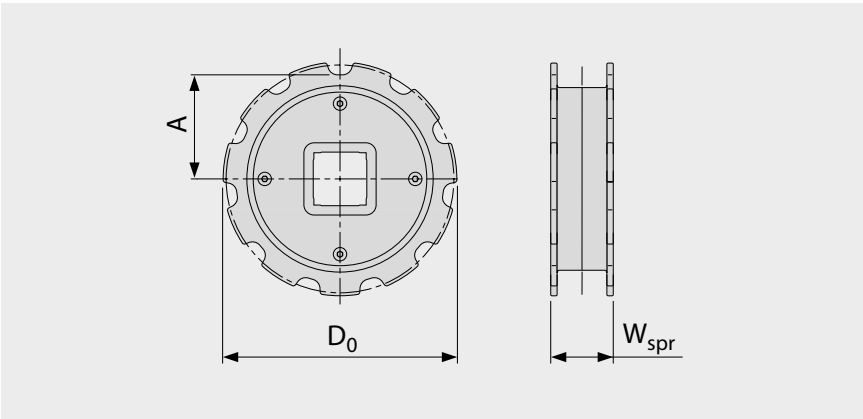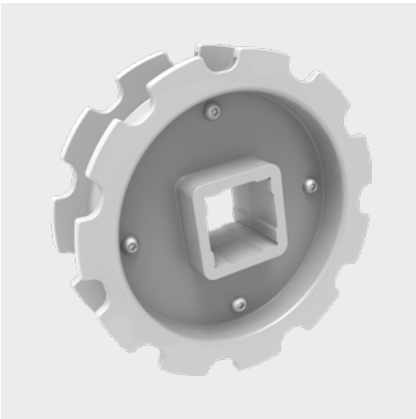

### Main dimensions

Sprocket size (Number of teeth)		Z11
W <sub>spr</sub>	mm	49.0
	inch	1.93
D <sub>0</sub>	mm	178.8
	inch	7.04
A <sub>max</sub>	mm	81.9
	inch	3.22
A <sub>min</sub>	mm	77.4
	inch	3.05

**Shaft bores** (● = Round, ■ = Square; ○ or □ = mold to order)

40	mm	● / ■
1.5	inch	□

### Recommended usage

Belt	Application	Recommended usage
S9.1-57 GRT	Straight/curved	Use in main conveying direction, only for a short time in the opposite direction and not under load
S9.1-57 GRT	Spiral tower with cage drive	This sprocket is not recommended

Material: POM, Color: UC

□ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2




MOVEMENT SYSTEMS


# SERIES 9.1 | INSTALLATION NOTES

Side flexing and spiral belt | Pitch 50 mm (1.97 in)

## Preferred travel direction



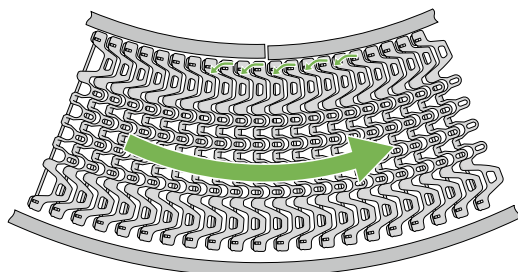


Curve conveyor



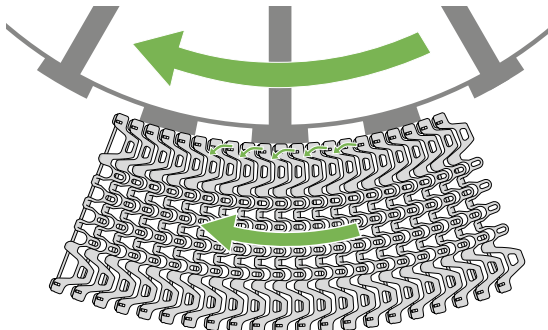


Cage driven spiral



## Curve direction S9.1 -> Belt CW (ClockWise)

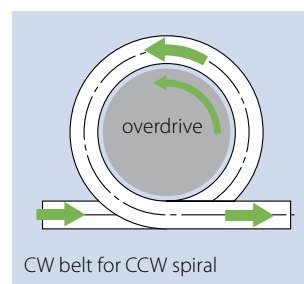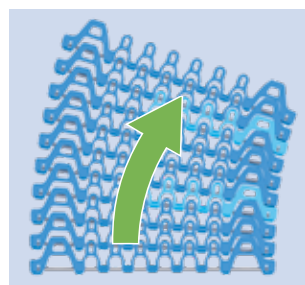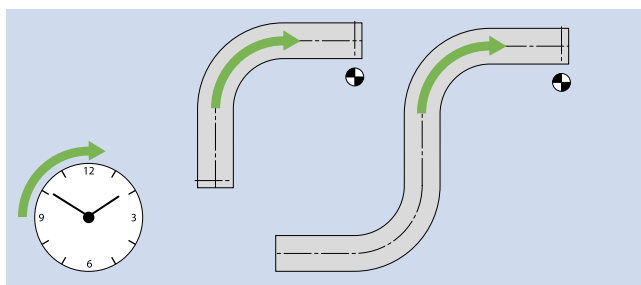

## Curve direction S9.1 -> Belt CCW (Counter ClockWise)

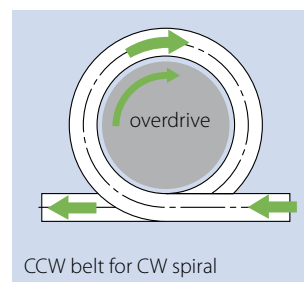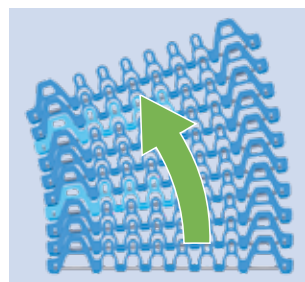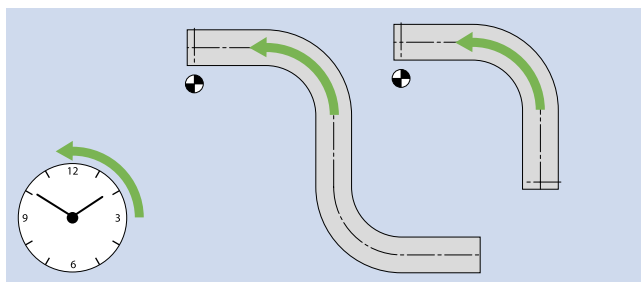

## Sprocket installation

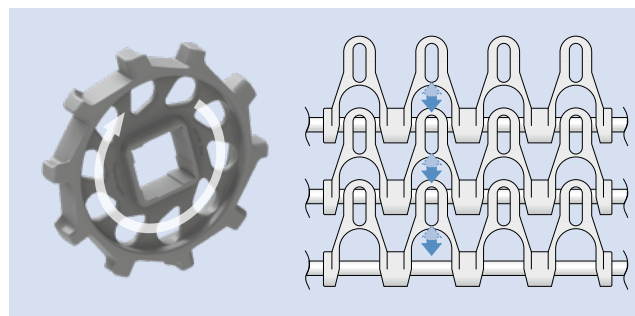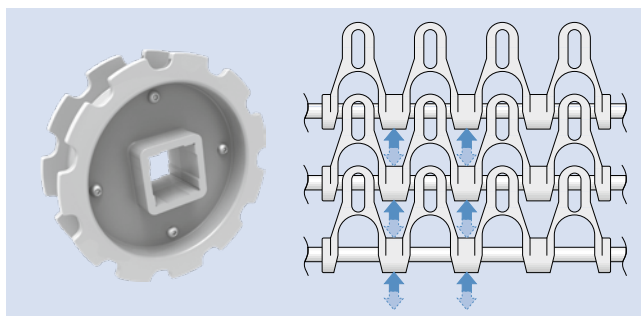

Further information in chapter 3 and 5




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 10**

Straight running belts  
Pitch 25.4 mm (1 in)

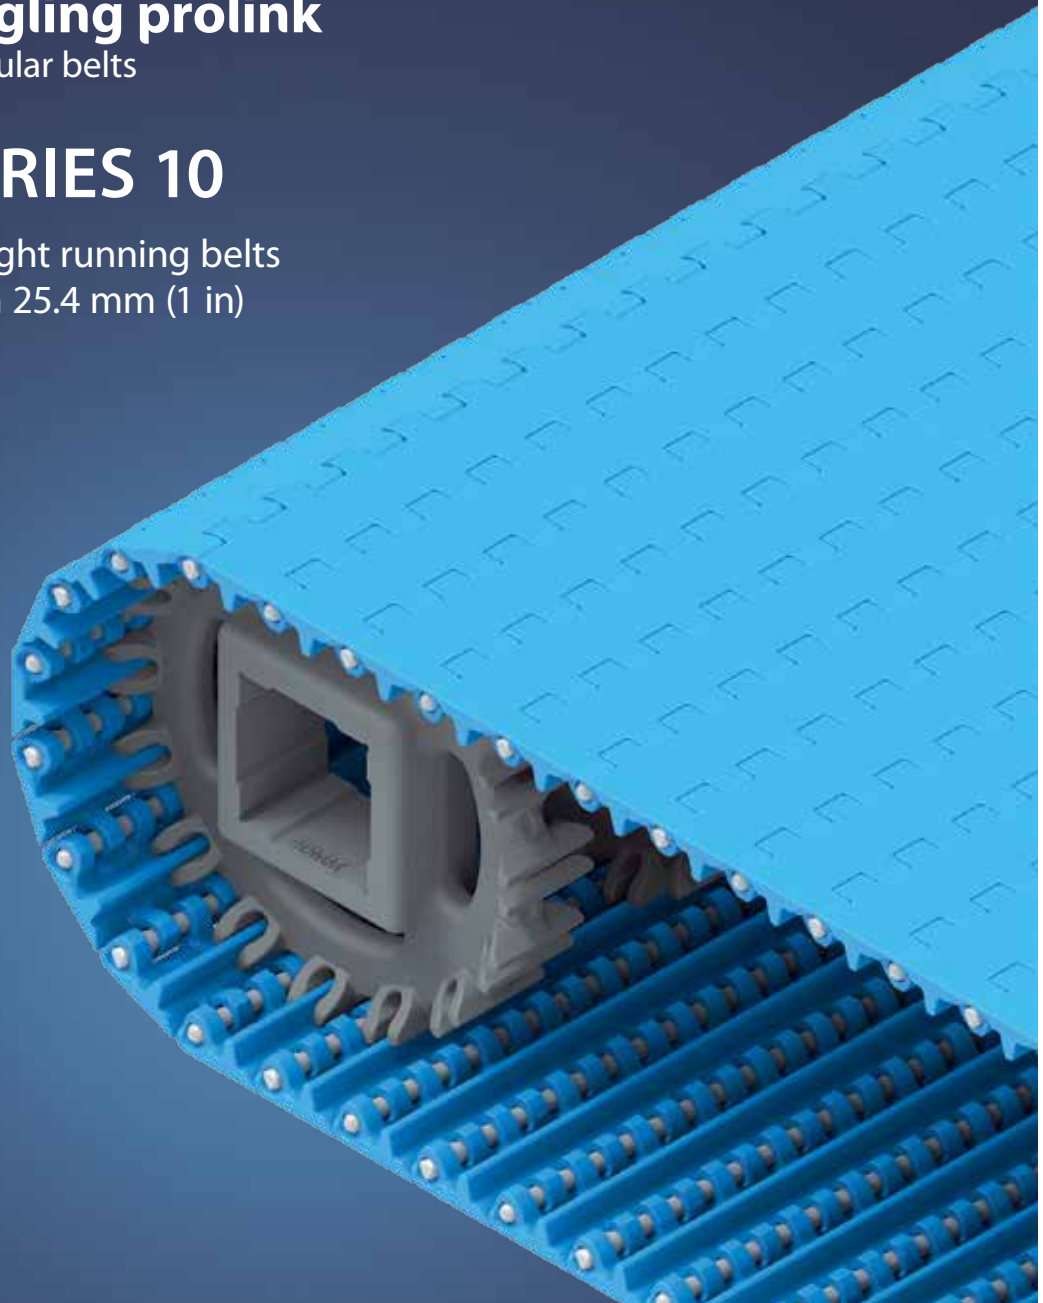


# SERIES 10 | OVERVIEW

siebling prolink  
modular belts

Straight running belts | Pitch 25.4 mm (1 in)

Belts for light to medium-duty hygiene-critical applications

Side view scale 1:1

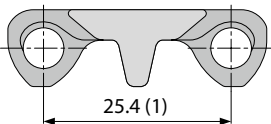


## Design characteristics

- Small number of eyelets ensures easy cleaning
- Hinges that open wide, combined with smooth, flat channels on the underside and a continuous drive bar produce an easy-to-clean design
- Robust design guarantees superior durability
- Optimal design of sprocket teeth and tracking fins provides superior sprocket engagement, safe belt tracking and an easy-to-clean sprocket

## Basic data

Pitch	25.4 mm (1 in)
Belt width min.	38.1 mm (1.5 in)
Width increments	19.05 mm (0.75 in)
Hinge pins	5 mm (0.2 in) made of plastic (PBT, PP, PE, PP-MD, POM-MD). One-piece up to a belt width of 1200 mm (47 in).

Available surface pattern and opening area

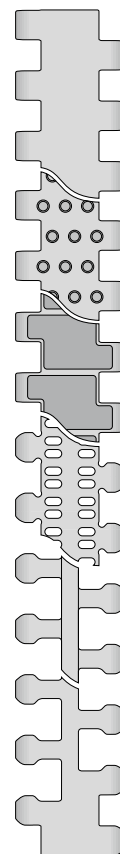

### S10-0 FLT

Closed, smooth surface

### S10-0 NTP

Closed surface with round studs

### S10-0 FRT1

Closed surface with friction top

### S10-22 FLT

Open (22 %), smooth surface

### S10-36 LRB

Open (36 %) surface and lateral ribbing

### S10-36 FLT


Open (36 %), smooth surface



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)

## Sprockets

in different sizes with  
round or square bore

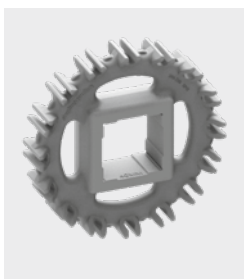


## Profiles

in different heights and  
designs for inclines



## Side guards

in different heights for  
retention of bulk products

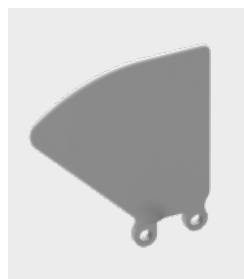

## Hold Down Tabs

Hold Down Tabs for  
additional guiding



## ProSnap

Quick-Release for easy open-  
ing and closing of the belt





# SERIES 10 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-0 FLT | 0% Opening | Flat top

Closed, smooth surface | Flat top surface

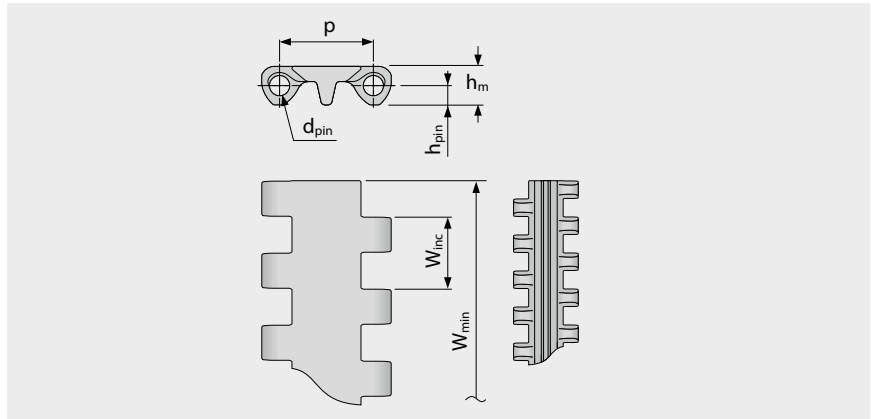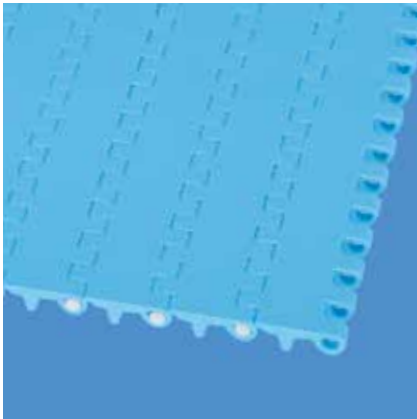

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	0.0	38.1	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.0	1.5	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT/LB	PE	WT	6	411	5.4	1.11	0.0	-70/65	-94/149	●	●	●
PE-MD	BL	POM-MD	BL	6	411	5.9	1.21	0.0	-70/65	-94/149	●	●	●
PP	WT/LB	PP	WT	8	548	5.1	1.04	0.26	5/100	41/212	●	●	●
PP-MD	BL	PP-MD	BL	8	548	5.3	1.09	0.26	5/100	41/212	●	●	●
POM	WT/LB	PBT	UC	20	1370	8.0	1.64	0.0	-45/90	-49/194	●	●	●
POM-MD	BL	POM-MD	BL	20	1370	8.3	1.7	0.0	-45/90	-49/194	●	●	●
Mold to order belts													
TPC1	LB	PBT	UC	6	411	7.1	1.45	-0.13	-25/80	-13/176	●	●	●
PA*	BL	PBT	UC	17	1165	6.7	1.37	0.74	-40/120	-40/248	●	●	●
PP-SW	BL	PP-SW	BL	6	411	5.1	1.04	0.26	5/100	41/212	●	●	●

Mold to width available in: 76 mm (3.0 in), 152 mm (6.0 in), 229 mm (9.0 in)

\* Values valid for dry applications (RH <50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

● BL (Blue), ● LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request








# SERIES 10 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-0 NTP | 0% Opening | Nub top (round studs)

Closed surface with round studs 9% contact area | Version available without round studs at the side (38 mm indent)

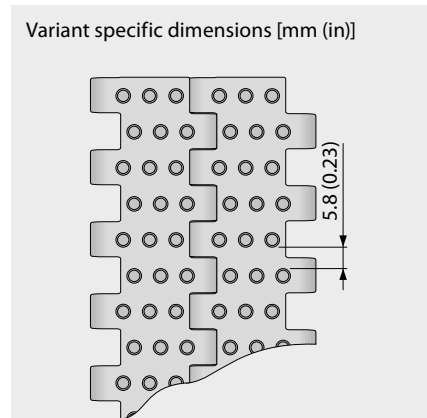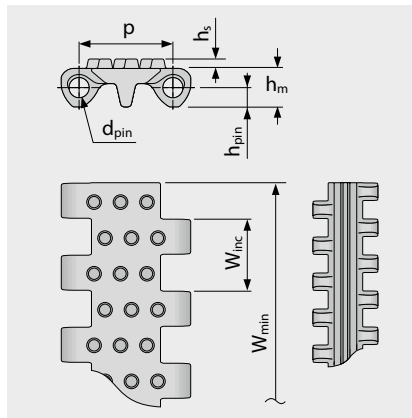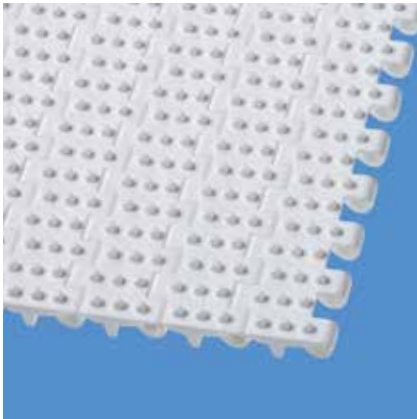


### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	2.5	38.1	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.1	1.5	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	6	411	5.5	1.13	0.0	-70/65	-94/149	●	●	●
PE	LB	PE	WT	6	411	5.5	1.13	0.0	-70/65	-94/149	●	●	●
POM	WT	PBT	UC	20	1370	8.2	1.68	0.0	-45/90	-49/194	●	●	●
POM	LB	PBT	UC	20	1370	8.2	1.68	0.0	-45/90	-49/194	●	●	●
PP-MD	BL	PP-MD	BL	8	548	5.4	1.11	0.26	5/100	41/212	●	●	●
PE-MD	BL	POM-MD	BL	6	411	6.5	1.33	0.0	-70/65	-94/149	●	●	●

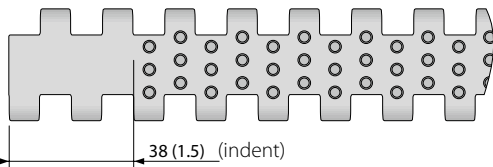

Also available with  
molded indent  
38 mm (1.5 in)

Mold to width available in: 229 mm (9.0 in)

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 10 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-0 FRT1 | 0 % Opening | Friction top (Design 1)

Closed surface with flat integrated friction pads (FRT1) for high grip | 67 % contact area | Version available without FRT1 structure at the side (38 mm indent)

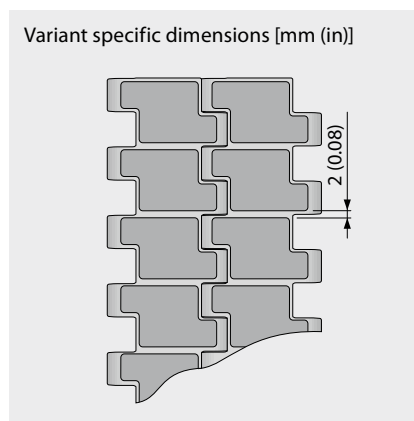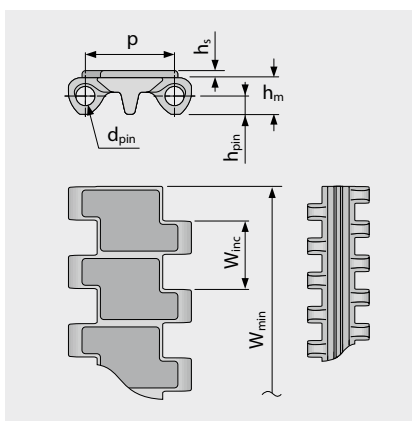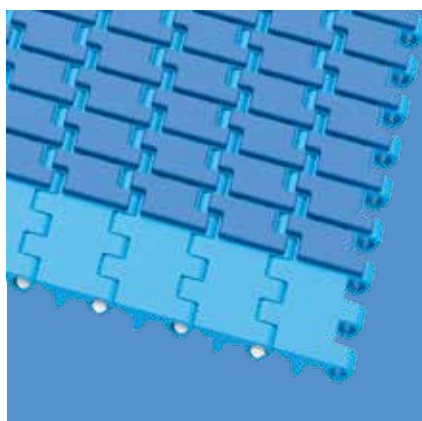


### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	2.0	38.1	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.08	1.5	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	PP	WT	R7	BG	8	548	6.3	1.29	0.26	5/100	41/212	●	●	
PP	LB	PP	WT	R7	BK	8	548	6.3	1.29	0.26	5/100	41/212	●	●	
PP	LB	PP	WT	R7	BL	8	548	6.3	1.29	0.26	5/100	41/212	●	●	

Mold to width available in: 229 mm (9.0 in)

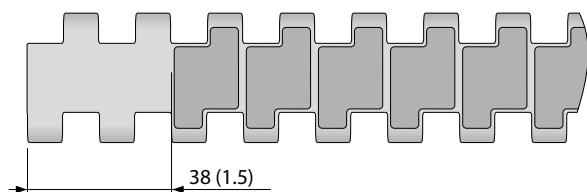

Also available with  
molded indent  
38 mm (1.5 in)

■ BG (Beige), ■ BL (Blue), ■ BK (Black), ■ LB (Light blue), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 10 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-22 FLT | 22 % Opening | Flat top

Open area (22 %) for excellent air circulation and drainage | Smooth surface | 70 % contact area (Largest opening: 2.6 x 5.3 mm/0.10 x 0.21 in)

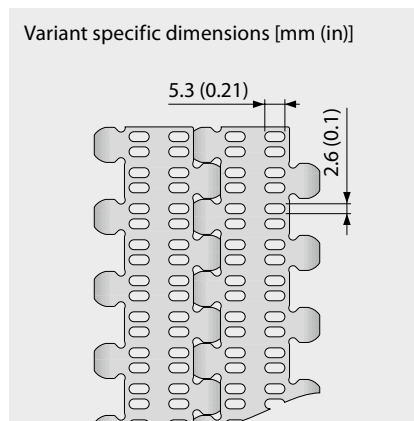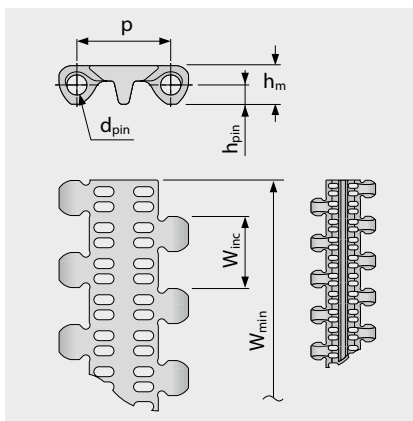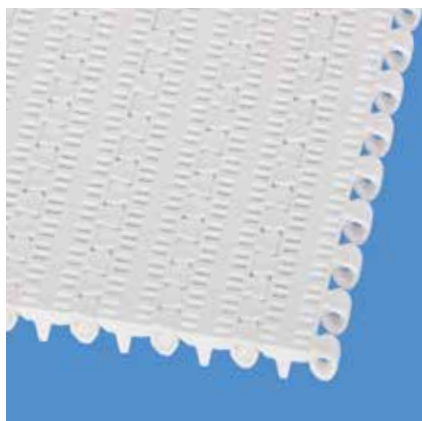

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	0.0	38.1	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.0	1.5	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	3	206	4.7	0.96	0.0	-70/65	-94/149	●	●	●
PE	LB	PE	WT	3	206	4.7	0.96	0.0	-70/65	-94/149	●	●	●
PP	WT	PP	WT	5	343	4.3	0.88	0.26	5/100	41/212	●	●	●
PP	LB	PP	WT	5	343	4.3	0.88	0.26	5/100	41/212	●	●	●
POM	WT	PBT	UC	11	754	6.7	1.37	0.0	-45/90	-49/194	●	●	●
POM	LB	PBT	UC	11	754	6.7	1.37	0.0	-45/90	-49/194	●	●	●
PP-MD	BL	PP-MD	BL	5	343	4.9	1.0	0.0	5/100	41/212	●	●	●

### Mold to order belts

PE-MD	BL	POM-MD	BL	3	206	5.1	1.04	0.0	-70/65	-94/149	●	●	●
-------	----	--------	----	---	-----	-----	------	-----	--------	---------	---	---	---

Mold to width available in: 76 mm (3.0 in), 229 mm (9.0 in)

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 10 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-36 LRB | 36 % Opening | Lateral rib

Open area (36 %) for excellent air circulation and drainage | Lateral ribbing 12% contact area (Largest opening: Ø = 5.9 mm/0.23 in) | open area lateral rib version for small inclines and gentle conveying of delicate products

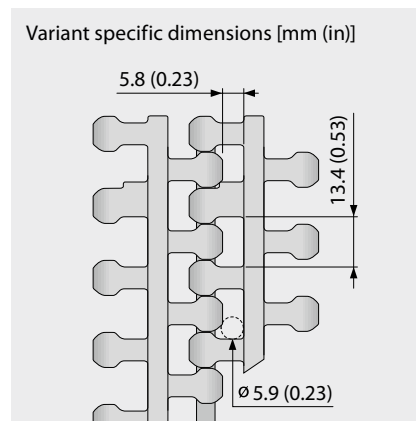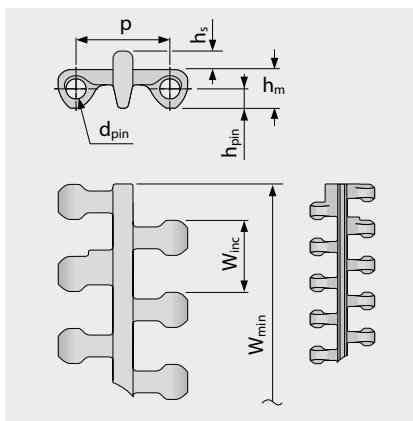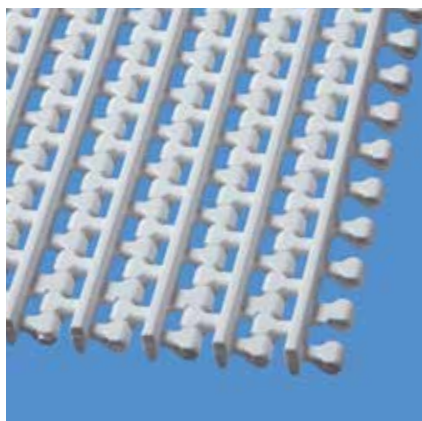

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	4.9	38.1	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.19	1.5	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT	PE	WT	4	274	5.8	1.19	0.0	-70/65	-94/149	●	●	●
PE	LB	PE	WT	4	274	5.8	1.19	0.0	-70/65	-94/149	●	●	●
PP	WT	PP	WT	6	411	4.9	1.0	0.26	5/100	41/212	●	●	●
PP	LB	PP	WT	6	411	4.9	1.0	0.26	5/100	41/212	●	●	●
POM	WT	PBT	UC	13	891	7.6	1.56	0.0	-45/90	-49/194	●	●	●
POM	LB	PBT	UC	13	891	7.6	1.56	0.0	-45/90	-49/194	●	●	●

Mold to width available in: 229 mm (9.0 in)

■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 10 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10-36 FLT | 36 % Opening | Flat top

Open area (36 %) for excellent air circulation and drainage | Smooth surface | 44 % contact area (Largest opening:  $\varnothing = 5.9 \text{ mm}/0.23 \text{ in}$ )

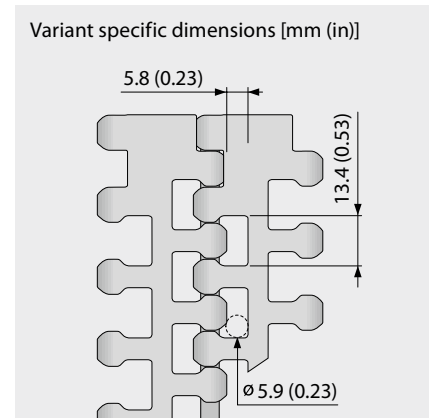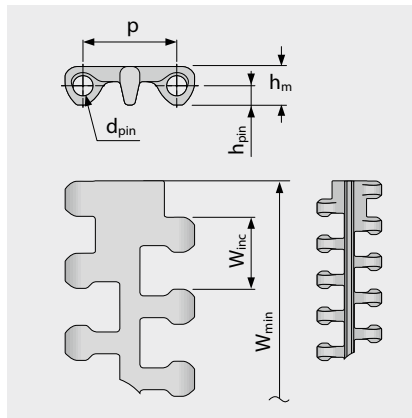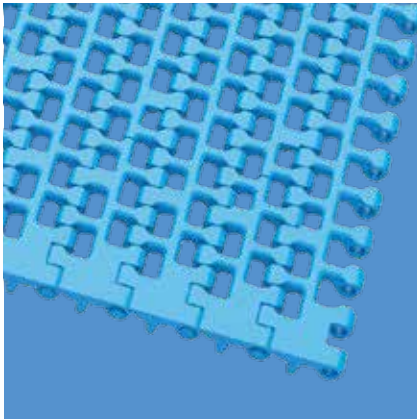

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	5.0	10.2	5.1	0.0	95.3	19.1	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.2	0.4	0.2	0.0	3.75	0.75	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PE	WT/LB	PE	WT	4	274	4.3	0.88	0.0	-70/65	-94/149	●	●	●
PP	WT/LB	PP	WT	6	411	4.0	0.82	0.26	5/100	41/212	●	●	●
PP-MD	BL	PP-MD	BL	6	411	4.4	0.9	0.26	5/100	41/212	●	●	●
POM	WT/LB	PBT	UC	13	891	6.2	1.27	0.0	-45/90	-49/194	●	●	●
PA*	BL	PBT	UC	13	891	6.0	1.23	0.74	-40/120	-40/248	●	●	●

#### Mold to order belts

POM-MD	BL	POM-MD	BL	13	891	6.6	1.35	0.0	-45/90	-49/194	●	●	●
--------	----	--------	----	----	-----	-----	------	-----	--------	---------	---	---	---

\* Values valid for dry applications (RH <50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

**Attention!** Due to the very large surface openings, personnel must be instructed not to place their fingers in or on this belt.

■ BL (Blue), ■ LB (Light blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 10 | PROSNAP

Straight running belt | Pitch 25.4 mm (1 in)

siegling prolink  
modular belts



## S10-0 FLT PSP | ProSnap

Quick-Release for easy, quick and toolless opening and closing of the belt | One pin solution for entire belt width

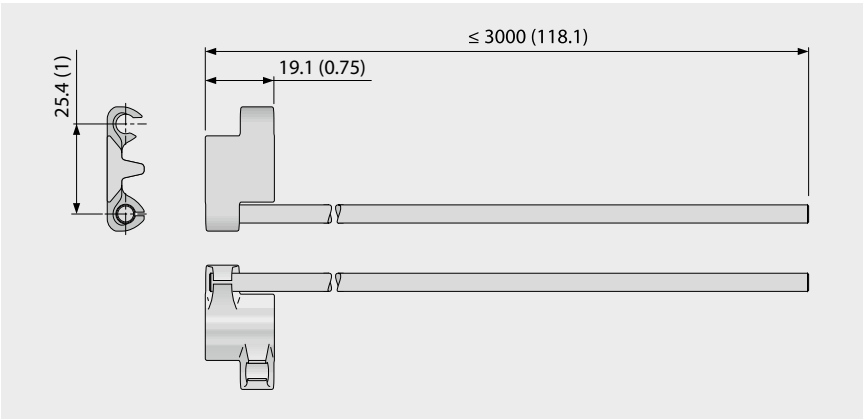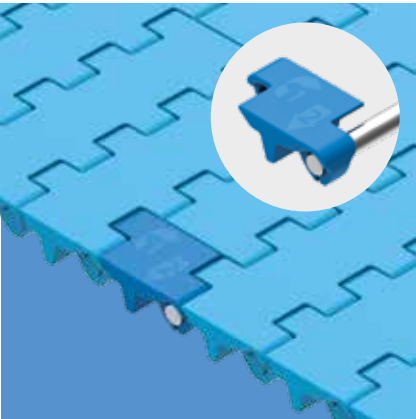

### Basic data

Module		Pin	
Material	Color	Material	Length [mm (in)]
POM	BL	SS	≤ 3000 (118)
Mold to order			
POM-MD	BL	SS	≤ 3000 (118)

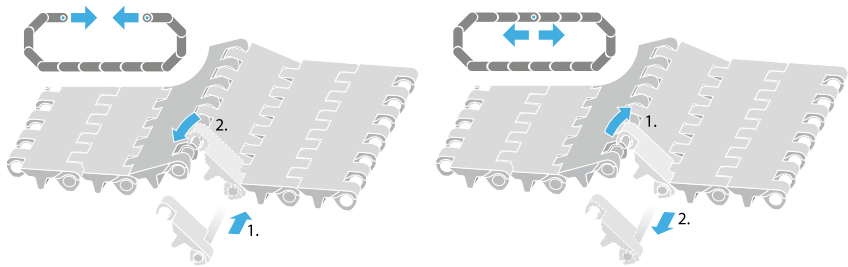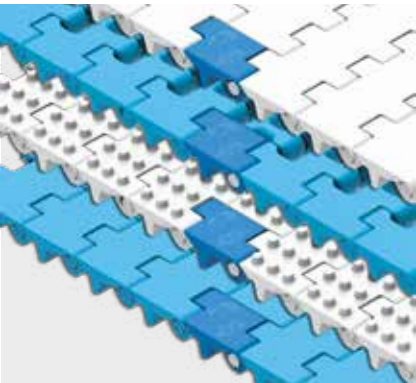

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.


# SERIES 10 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10 SPR | Sprockets

Optimal design of sprocket teeth and tracking fins provides superior sprocket engagement, safe belt tracking and an easy-to-clean sprocket

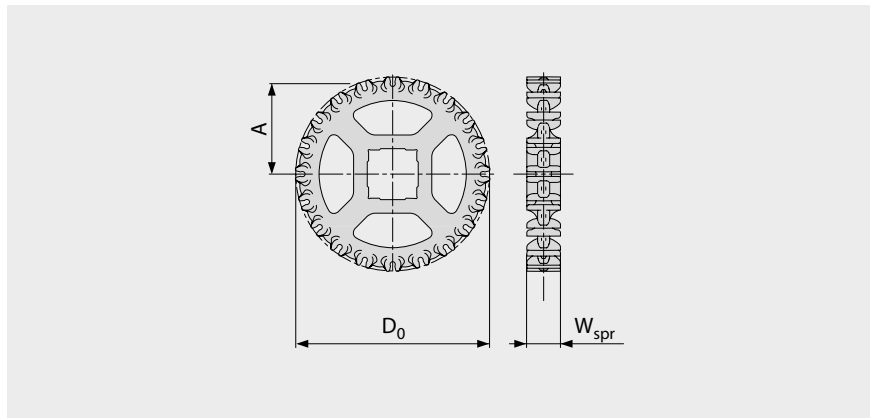

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z8	Z10	Z12	Z15	Z16	Z18	Z20
W <sub>spr</sub>	mm	28.0	28.0	28.0	28.0	28.0	28.0	28.0	28.0
	inch	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
D <sub>0</sub>	mm	51.4	66.8	82.4	98.2	122.4	130.4	146.4	162.5
	inch	2.02	2.63	3.24	3.87	4.82	5.13	5.76	6.40
A <sub>max</sub>	mm	19.8	27.9	35.9	43.9	56.0	60.0	68.1	76.1
	inch	0.78	1.10	1.41	1.73	2.20	2.36	2.68	3.00
A <sub>min</sub>	mm	17.2	25.8	34.1	42.4	54.8	58.9	67.0	75.2
	inch	0.68	1.02	1.34	1.67	2.16	2.32	2.64	2.96

### Shaft bores (● = Round, ■ = Square; ○ or □ = mold to order)

25	mm	●	● / ■	■					
30	mm			●	●	●	●	●	●
40	mm			○ / ■	● / ■	● / ■	■	■	● / ■
60	mm								■
1	inch	●	● / ■	● / ■	●	●	●	●	●
1.25	inch			●	●	●	●	●	●
1.44	inch				●	○			●
1.5	inch			■	■	■	■	■	■
2.5	inch								■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS






# SERIES 10 | PROFILES

Straight running belt | Pitch 25.4 mm (1 in)

**siegling prolink**  
modular belts

## S10-0 FLT PMU/S10-0 FLT PMU I38

Flat top surface for dry products

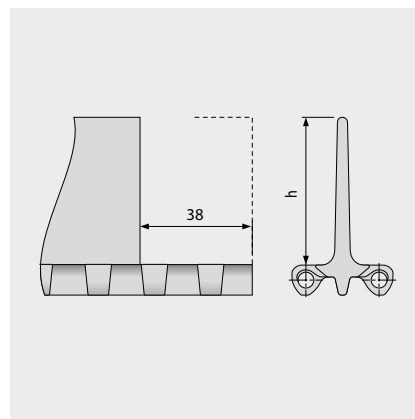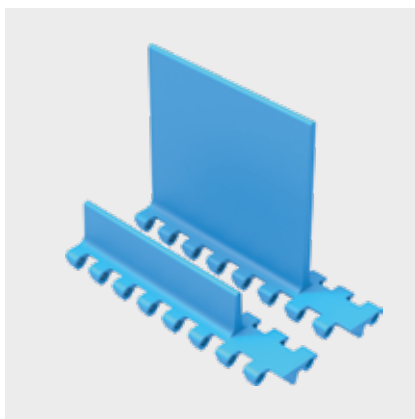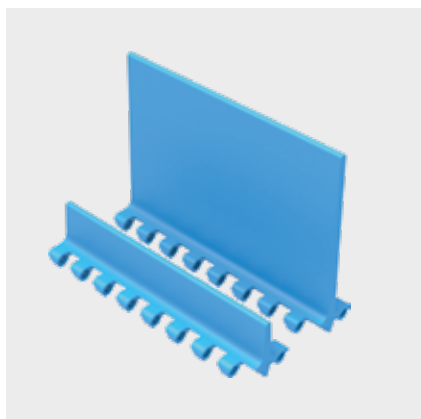


### Basic data


Material	Color	Height (h)	
		25 mm 1 inch	100 mm 4 inch
PE	LB	●/▲	●/▲
PE	WT	●/▲	●/▲
POM	LB	●/▲	●/▲
POM	WT	●/▲	●/▲
PP	LB	●/▲	●/▲
PP	WT	●/▲	●/▲

● = no indent, ▲ = with indent 38 mm


Molded width: 152 mm (6.0 in)

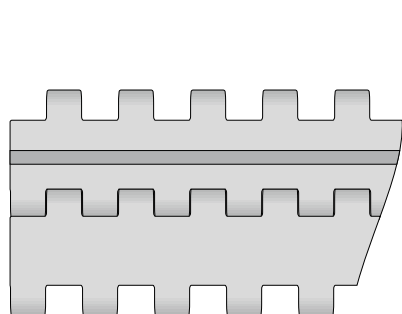

Standard configuration S10-0 FLT PMU

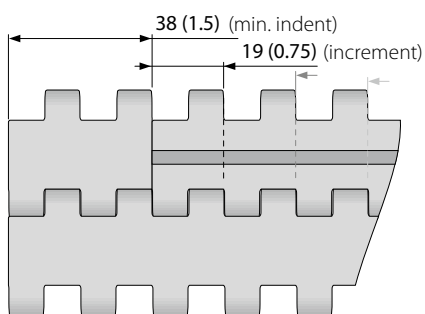

Indent configuration S10-0 FLT PMU

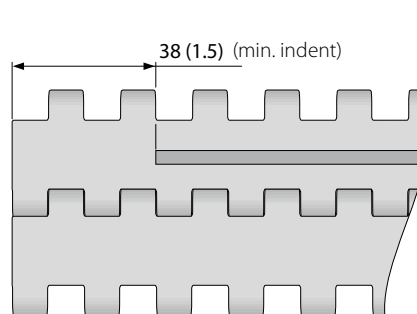

Standard configuration S10-0 FLT PMU I38

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 10 | PROFILES

Straight running belt | Pitch 25.4 mm (1 in)

**siegling prolink**  
modular belts

## S10-0 NCL PMU/S10-0 NCL PMU I38

No cling surface to improve release of wet and sticky products

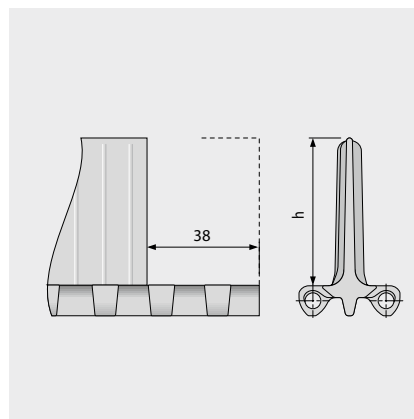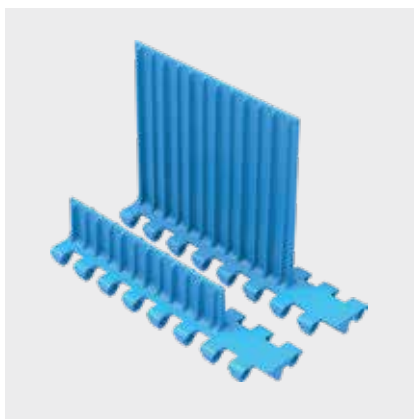


### Basic data


Material	Color	Height (h)	
		25 mm 1 inch	100 mm 4 inch
PE	LB	●/▲	●/▲
PE	WT	●/▲	●/▲
PE-MD	BL	●/▲	●
POM	LB	●/▲	●/▲
POM	WT	●/▲	●/▲
POM-MD	BL	●/▲	●/▲
PP	LB	●/▲	●/▲
PP	WT	●/▲	●/▲

● = no indent, ▲ = with indent 38 mm


Molded width: 152 mm (6.0 in)

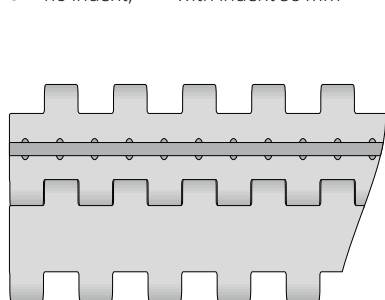

Standard configuration S10-0 NCL PMU

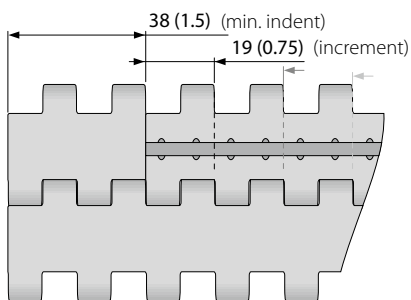

Indent configuration S10-0 NCL PMU

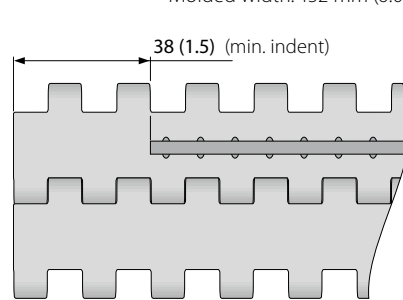

Standard configuration S10-0 NCL PMU I38

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS

# SERIES 10 | SIDE GUARDS

siegling prolink  
modular belts


Straight running belt | Pitch 25.4 mm (1 in)

## S10 SG | Side guards

For retention of bulk products




Recommended running direction

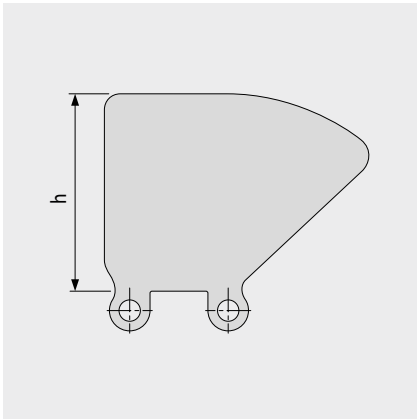

### Basic data

Material	Color	Height (h)			
		25 mm 1 inch	50 mm 2 inch	75 mm 3 inch	100 mm 4 inch
PE	LB	●	●	●	●
PE	WT	●	●	●	●
PE-MD	BL	●	●		
PP	LB	●	●	●	●
PP	WT	●	●	●	●

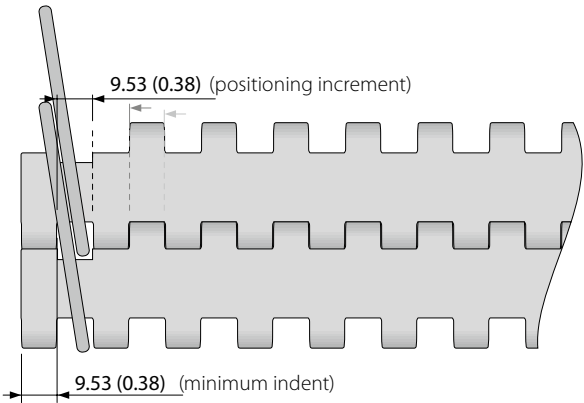

■ BL (Blue), ■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS



# SERIES 10 | HOLD DOWN TABS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S10 HDT | Hold Down Tabs

Used on wider belts to prevent lift an swan neck conveyors | To improve strength, stability and cleanability they are moulded on a narrow module

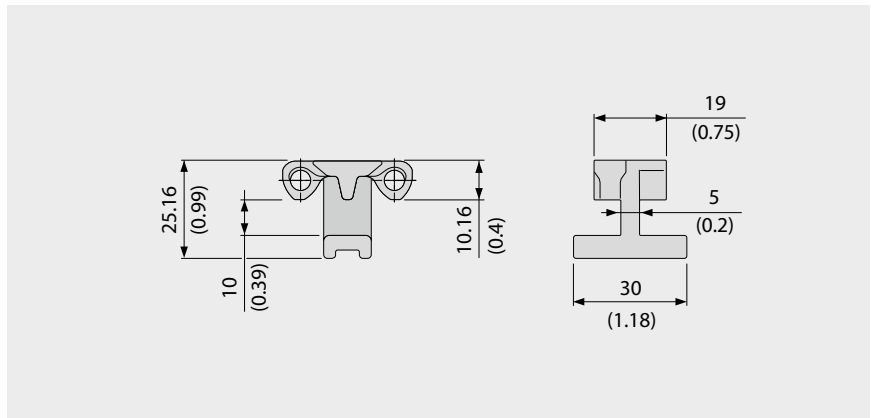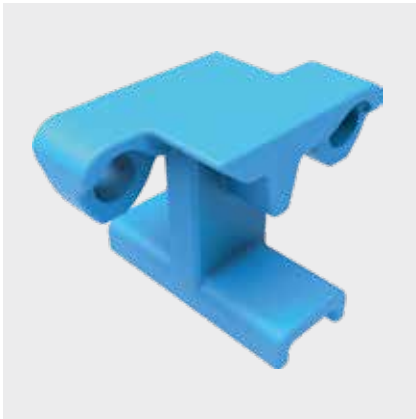


### Basic data

Material	Color
POM	LB
	WT

Using Hold Down Tabs results in constraints with regards to sprocket and shaft size to ensure sufficient clearance to the shaft (see also chapter 3.3 hold down tabs).

### Example

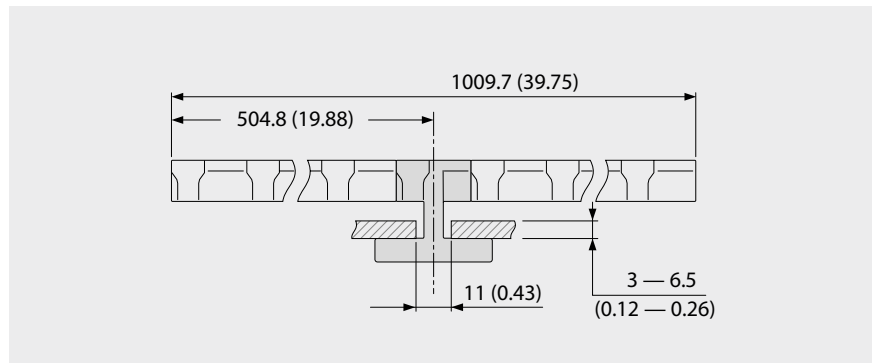

### Sprocket options using HDT

Sprocket size (Number of teeth)	Maximum bore round		Maximum bore square	
	[mm]	[inch]	[mm]	[inch]
Z6	NR	NR	NR	NR
Z8	15	0.75	15	0.5
Z10	35	1.25	25	1.0
Z12	50	1.75	35	1.5
Z15	70	2.75	55	2.0
Z16	80	3.0	60	2.25
Z18	95	3.5	70	2.75
Z20	110	4.25	85	3.25

■ LB (Light blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 11**

Side flexing belts  
Pitch 25 mm (0.98 in)

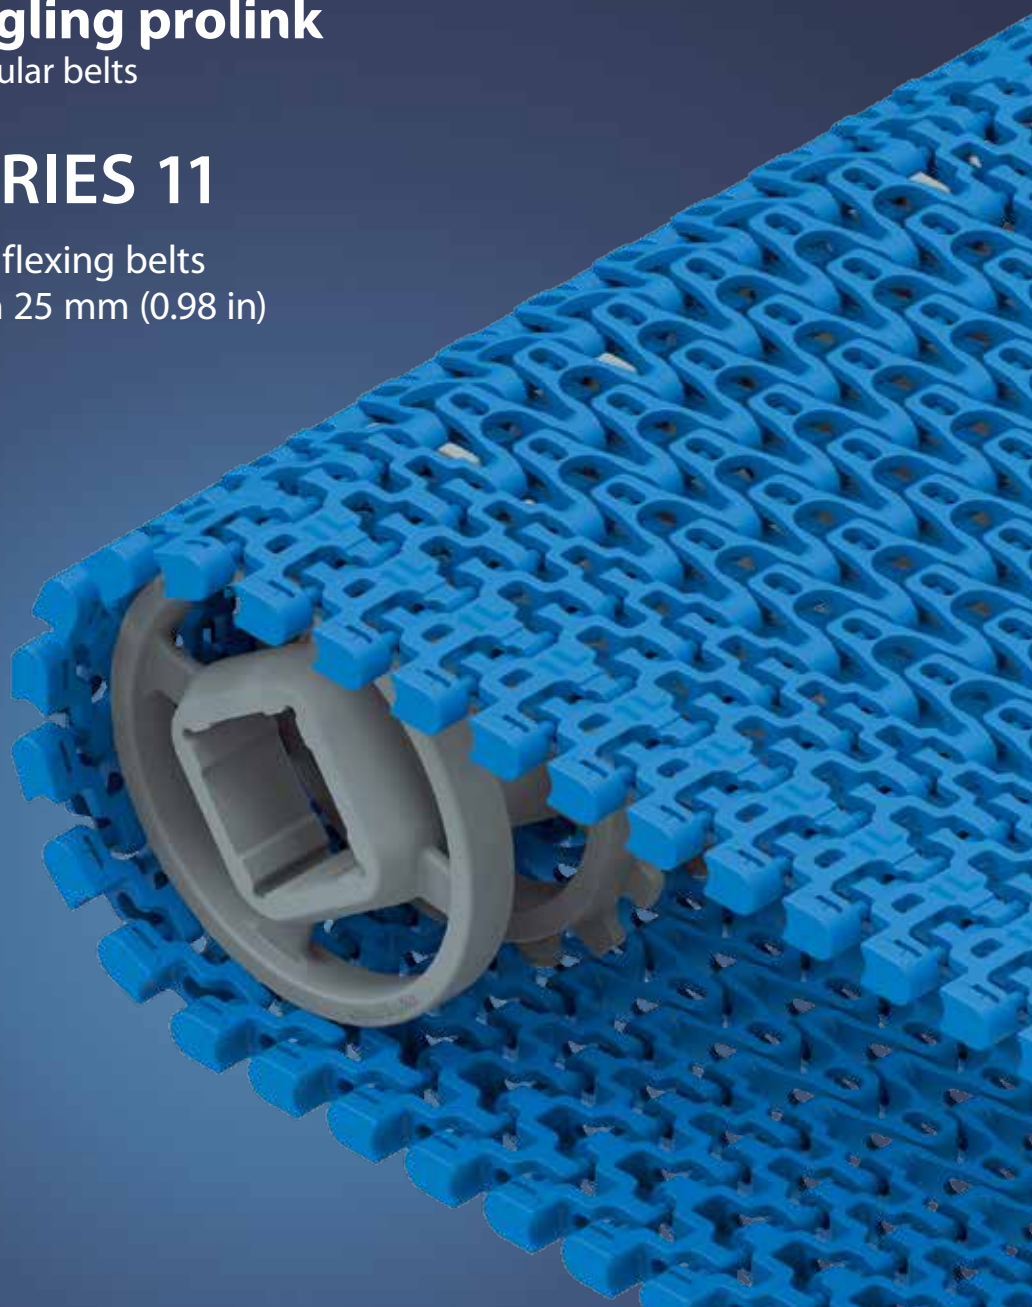


# SERIES 11 | OVERVIEW

siegling prolink  
modular belts

Side flexing belts | Pitch 25 mm (0.98 in)

## Belts for light-duty food and non-food applications

### Side view scale 1:1

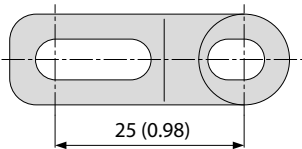


### Design characteristics

- 45 % open area provides excellent cooling and draining capabilities
- All plastic lightweight belts (plastic pins)
- Tight radius belt with minimum curve radius of 1.4 x belt width
- Outermost hinge is fixed to the pin to prevent deflection and elimination of potential belt edge catch points
- Suitable for both straight and radius conveying
- Ideal transmission of force due to sprockets offset inwards. Idlers support the belt on the outside

### Basic data


Pitch	25 mm (0.98 in)
Belt width min.	175 mm (6.9 in)
Belt width max.	1000 mm (39.37 in)
Width increments	25 mm (0.98 in)
Hinge pins	5 mm (0.2 in) made of plastic (PBT) Combo: 5 mm (0.2 in) stainless steel

### Available surface pattern and opening area

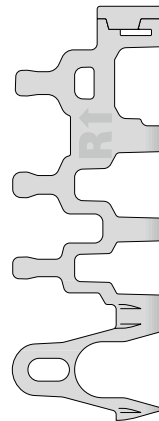

#### S11-45 GRT

Open (45 %), lattice-shaped surface with replaceable caps

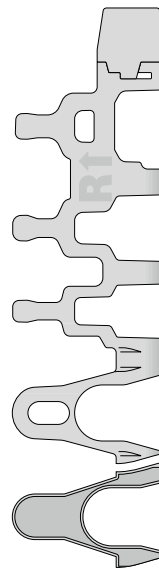

#### S11-45 GRT HD


Open (45 %), lattice-shaped surface with replaceable Hold Down caps

#### S11-33 FRT2

Open (33 % for full FRT2 surface area), surface with friction top, flat

### Sprockets/Idlers

in different sizes with round or square bore

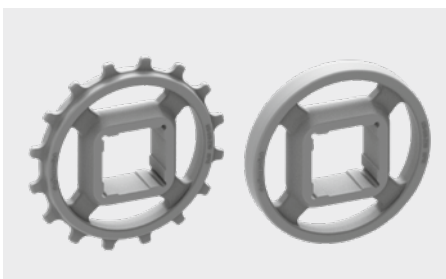

### Profiles

in different heights and designs for inclines






# SERIES 11 | BELT TYPES

siebling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in) |  $C_c = 1.4$

## S11-45 GRT | 45 % Opening | Grid top

Open area (45 %) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 9.2$  mm/0.36 in) | Lattice-shaped surface with robust, replaceable caps on the belt edges | Collapse factor ( $C_c$ ) = 1.4

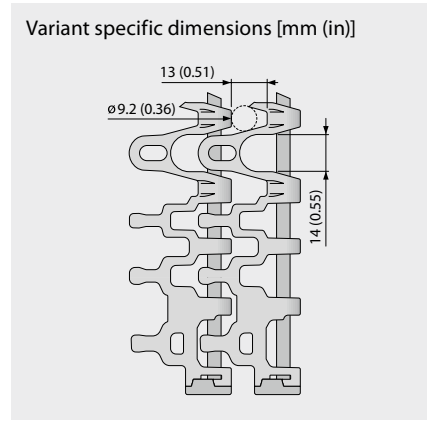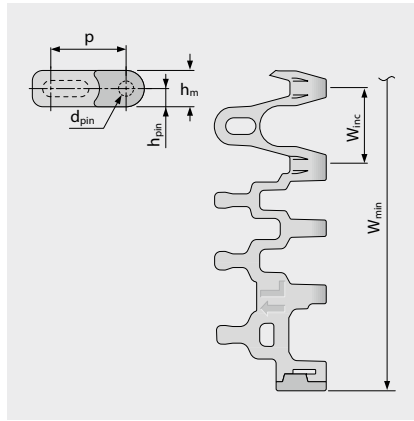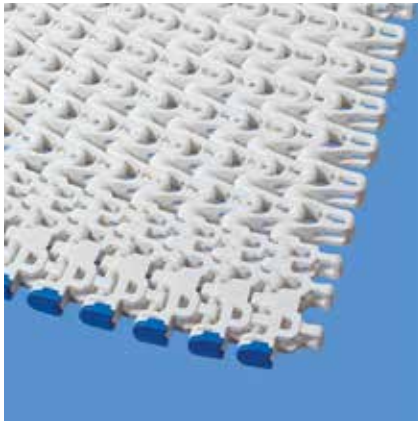

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	175.0	25.0	±0.3	1.4 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	6.89	0.98	±0.3	1.4 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	PBT	UC	9	617	600	135	4.7	0.96	0.2	5/100	41/212	●	●	●
PP	BL	PBT	BL	9	617	600	135	4.7	0.96	0.2	5/100	41/212	●	●	●
POM-CR	WT	PBT	UC	15	1028	1000	225	6.7	1.37	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	PBT	BL	15	1028	1000	225	6.7	1.37	0.0	-45/90	-49/194	●	●	●
PA*	BL	PBT	BL	15	1028	1000	225	5.7	1.17	0.6	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH <50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request








# SERIES 11 | BELT TYPES

siegling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in) |  $C_c = 1.4$

## S11-45 GRT HD | 45 % Opening | Grid top · Hold Down

Open area (45 %) for excellent air circulation and drainage | 42 % contact area (Largest opening:  $\varnothing = 9.2$  mm/0.36 in) | Lattice-shaped surface with replaceable Hold Down caps | Collapse factor ( $C_c$ ) = 1.4

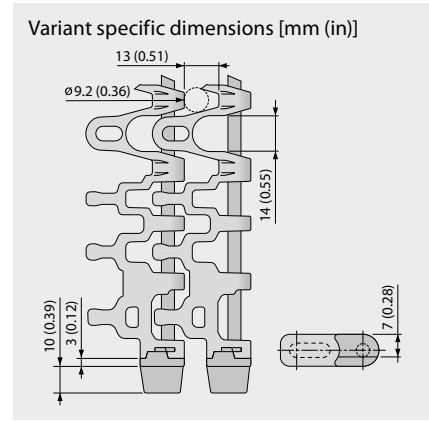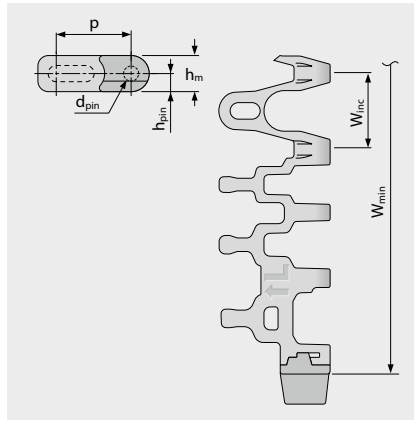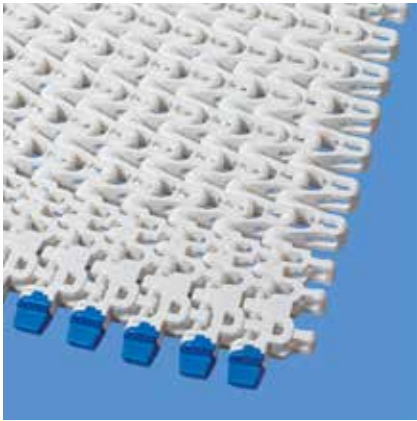

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	175.0	25.0	±0.3	1.4 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	6.89	0.98	±0.3	1.4 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	PBT	UC	9	617	600	135	4.7	0.96	0.2	5/100	41/212	●	●	●
PP	BL	PBT	BL	9	617	600	135	4.7	0.96	0.2	5/100	41/212	●	●	●
POM-CR	WT	PBT	UC	15	1028	1000	225	6.7	1.37	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	PBT	BL	15	1028	1000	225	6.7	1.37	0.0	-45/90	-49/194	●	●	●
PA*	BL	PBT	BL	15	1028	1000	225	5.7	1.17	0.6	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH <50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 11 | BELT TYPES

siebling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in) |  $C_c = 1.4$

## S11-33 FRT2 | 33 % Opening | Friction top (Design 2)

Open area (33 %) for full FRT2 surface area | 47 % contact area (Largest opening:  $\varnothing = 8 \text{ mm}/0.31 \text{ in}$ ) | Lattice-shaped surface with flat integrated friction pads (FRT2) for better grip. Minimum indent FRT2: 125 mm (5 in)/175 mm (7 in) | Collapse factor ( $C_c$ ) = 1.4

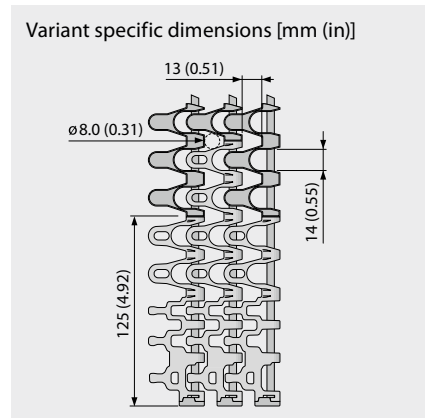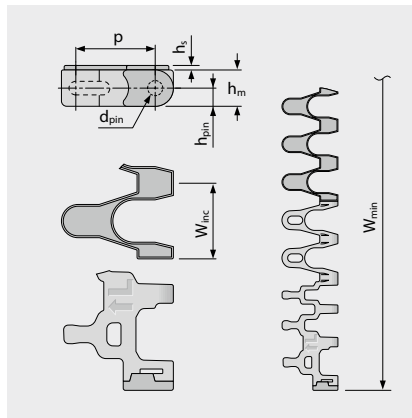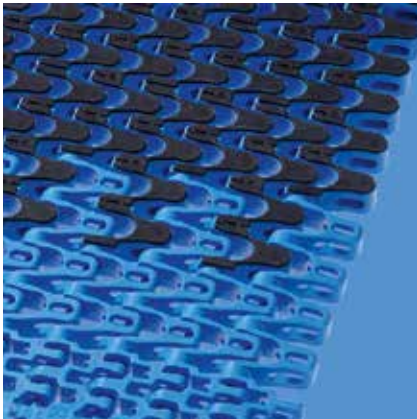

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	1.5	500.0	25.0	±0.3	1.4 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.06	19.69	0.98	±0.3	1.4 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation [%]	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]		[°C]	[°F]	FDA	EU	MHLW
PP	WT	PBT	UC	R7	BG	9	617	600	135	6.1	1.25	0.2	5/100	41/212	●	●	
PP	BL	PBT	BL	R7	BG	9	617	600	135	6.1	1.25	0.2	5/100	41/212	●	●	
PP	BL	PBT	BL	R7	BK	9	617	600	135	6.1	1.25	0.2	5/100	41/212	●	●	

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# S11 COMBO | BELT TYPES

siebling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in) |  $C_c = 1.45$

## S11/S5 ST-45 GRT CCW | 45 % Opening | Grid top | Counter clockwise or left hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Excellent air circulation and drainage | 42 % contact area (Largest opening:  $\varnothing = 13$  mm/0.51 in) | Lattice shaped surface | SS pins for high stiffness | Collapse factor ( $C_c$ ) = 1.45

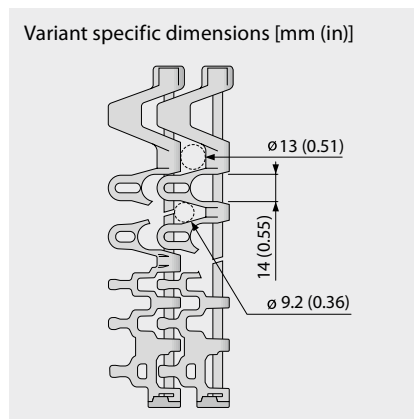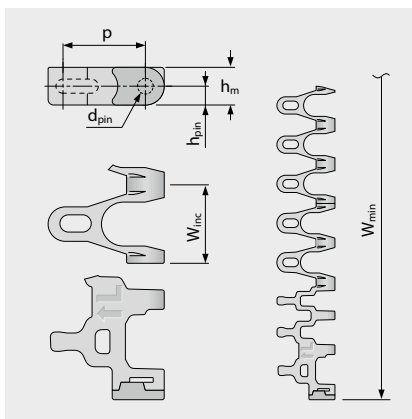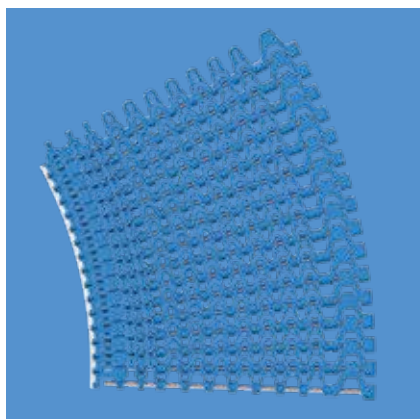

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.0	5.0	12.0	6.0	0.0	175.0	25.0	±0.3	1.45 x W <sub>B</sub>	25.0	50.0	75.0	25.0
inch	0.98	0.2	0.47	0.24	0.0	6.89	0.98	±0.3	1.45 x W <sub>B</sub>	0.98	1.97	2.95	0.98

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin	Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	WT	SS	18	1233	1200	270	10.2	2.09	0.2	5/100	41/212	●	●	●
PP	BL	SS	18	1233	1200	270	10.2	2.09	0.2	5/100	41/212	●	●	●
POM-CR	WT	SS	25	1713	2100	472	13.2	2.70	0.0	-45/90	-49/194	●	●	●
POM-CR	BL	SS	25	1713	2100	472	13.2	2.70	0.0	-45/90	-49/194	●	●	●
PA*	BL	SS	20	1370	1680	378	13.0	2.66	0.6	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 11 | SPROCKETS

siebling prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in)

## S11 SPR | Sprockets

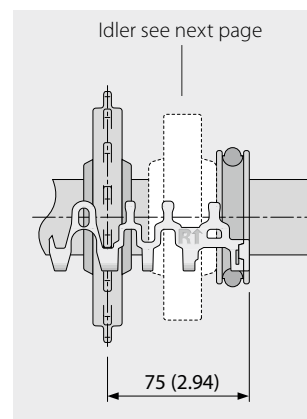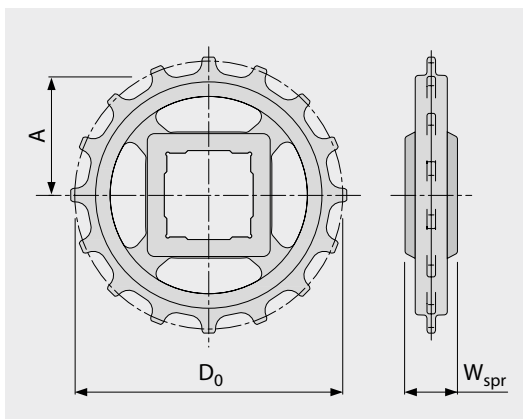

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z9	Z11	Z12	Z16	Z18	Z20
W <sub>spr</sub>	mm	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	inch	0.94	0.94	0.94	0.94	0.94	0.94	0.94
D <sub>0</sub>	mm	49.6	72.6	88.0	95.8	127.2	142.8	158.5
	inch	1.95	2.86	3.46	3.77	5.01	5.62	6.24
A <sub>max</sub>	mm	18.8	30.3	38.0	41.9	57.6	65.4	73.3
	inch	0.74	1.19	1.50	1.65	2.27	2.57	2.89
A <sub>min</sub>	mm	16.3	28.5	36.5	40.5	56.5	64.4	72.4
	inch	0.64	1.12	1.44	1.59	2.22	2.54	2.85

### Shaft bores (● = Round, ■ = Square)

25	mm		● / ■	●	● / ■	●	●	●
30	mm		● / ■	●	●	●	●	●
40	mm			■	● / ■	● / ■	● / ■	● / ■
0.75	inch	●						
1	inch		● / ■	●	● / ■	●	●	●
1.25	inch		● / ■	●	●	●	●	●
1.5	inch			■	● / ■	● / ■	● / ■	● / ■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2

Sprocket installation see chapter 5.2



MOVEMENT SYSTEMS



# SERIES 11 | IDLER

sieging prolink  
modular belts

Side flexing belt | Pitch 25 mm (0.98 in)

## S11 IDL | Idler

For side support and return roller without tooth engagement

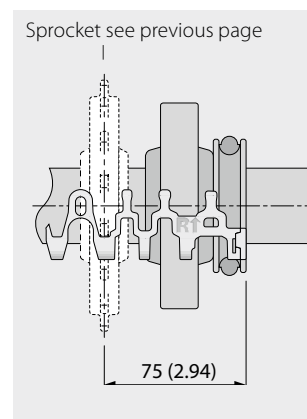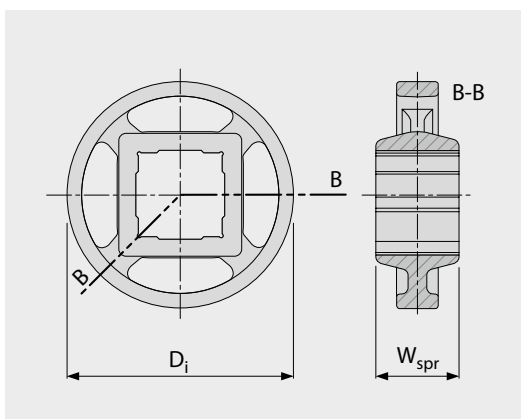

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z9	Z11	Z12	Z16	Z18	Z20
W <sub>spr</sub>	mm	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	inch	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Di	mm	31.7	56.1	72.2	80.3	112.3	128.2	144.1
	inch	1.25	2.21	2.84	3.16	4.42	5.05	5.67

### Shaft bores (● = Round, ■ = Square)

25	mm		● / ■	●	● / ■	●	●	●
30	mm		● / ■	●	●	●	●	●
40	mm			■	● / ■	● / ■	● / ■	● / ■
0.75	inch	●						
1	inch		● / ■	●	● / ■	●	●	●
1.25	inch		● / ■	●	●	●	●	●
1.5	inch			■	● / ■	● / ■	● / ■	● / ■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed shaft dimensions see appendix 6.3

Idler installation see chapter 5.2 (Sprocket installation)



MOVEMENT SYSTEMS


# SERIES 11 | PROFILES

Side flexing belt | Pitch 25 mm (0.98 in)

siegling prolink  
modular belts


## S11-45 GRT PMC

Open version (45 %) base module for drainage

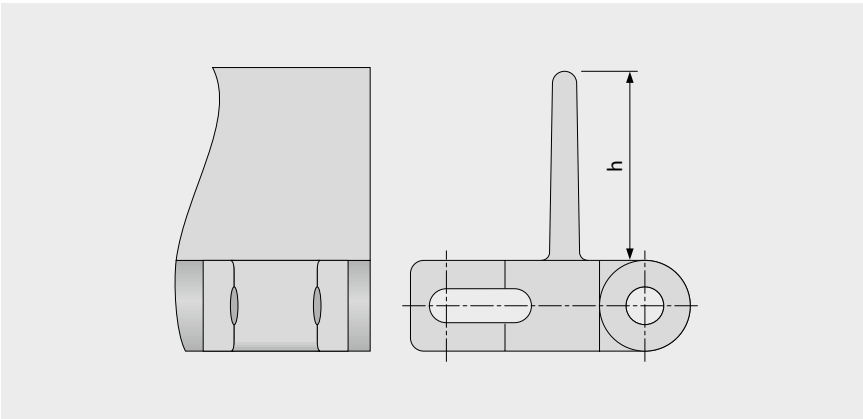

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	50 mm 2 inch
PE	WT	●	●
POM	BL	●	●
POM	DB	●	●
POM	UC	●	●
POM	WT	●	●
PP	DB	●	●
PP	WT	●	●

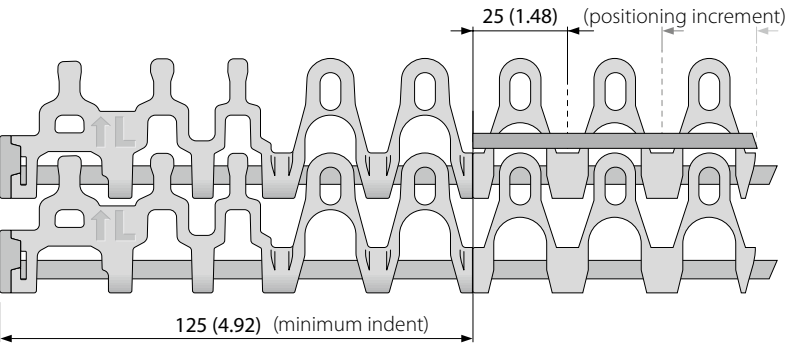

Molded width: 100 mm (3.9 in)

■ BL (Blue), ■ DB (Dark blue), ■ UC (Uncolored), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

# SERIES 11 | INSTALLATION NOTES


Side flexing belt | Pitch 25 mm (0.98 in)

## Preferred travel direction

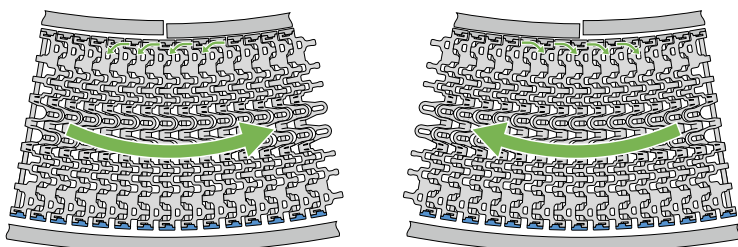


Curve conveyor


## Curve direction S11-> CW (ClockWise) or CCW (Counter ClockWise)

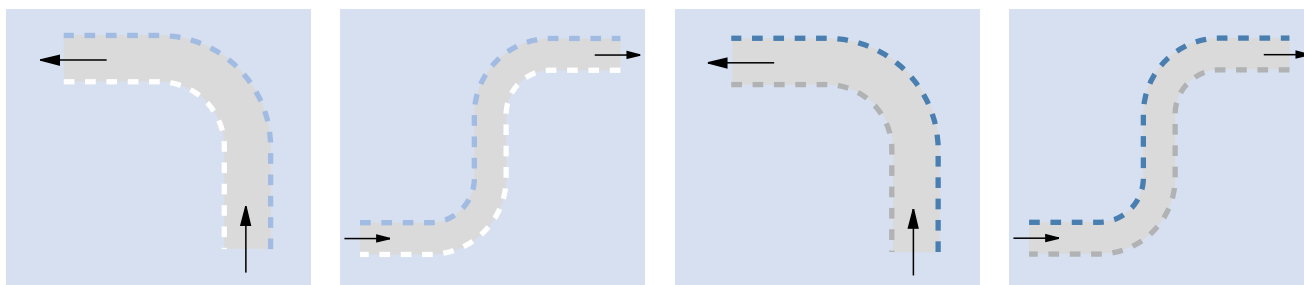

## Curve direction S11/S5 ST Combo -> Belt CCW (Counter ClockWise)

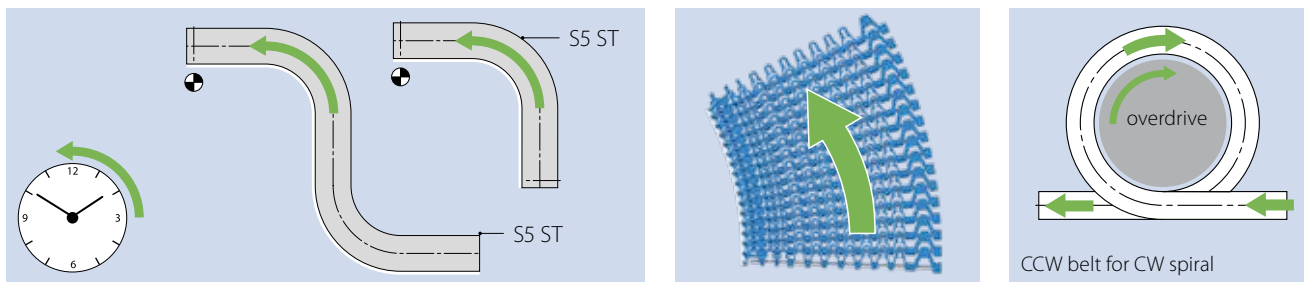

## Sprocket installation

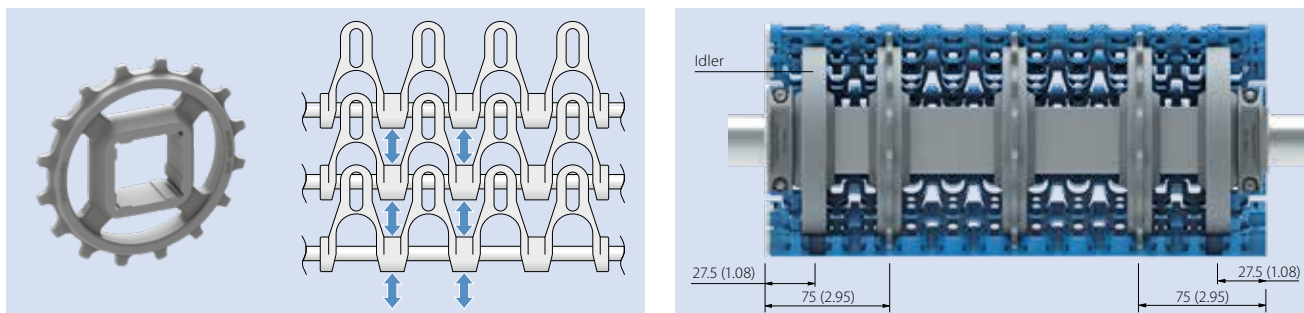

Further information in chapter 3 and 5




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 13**

Straight running belts  
Pitch 8 mm (0.31 in)

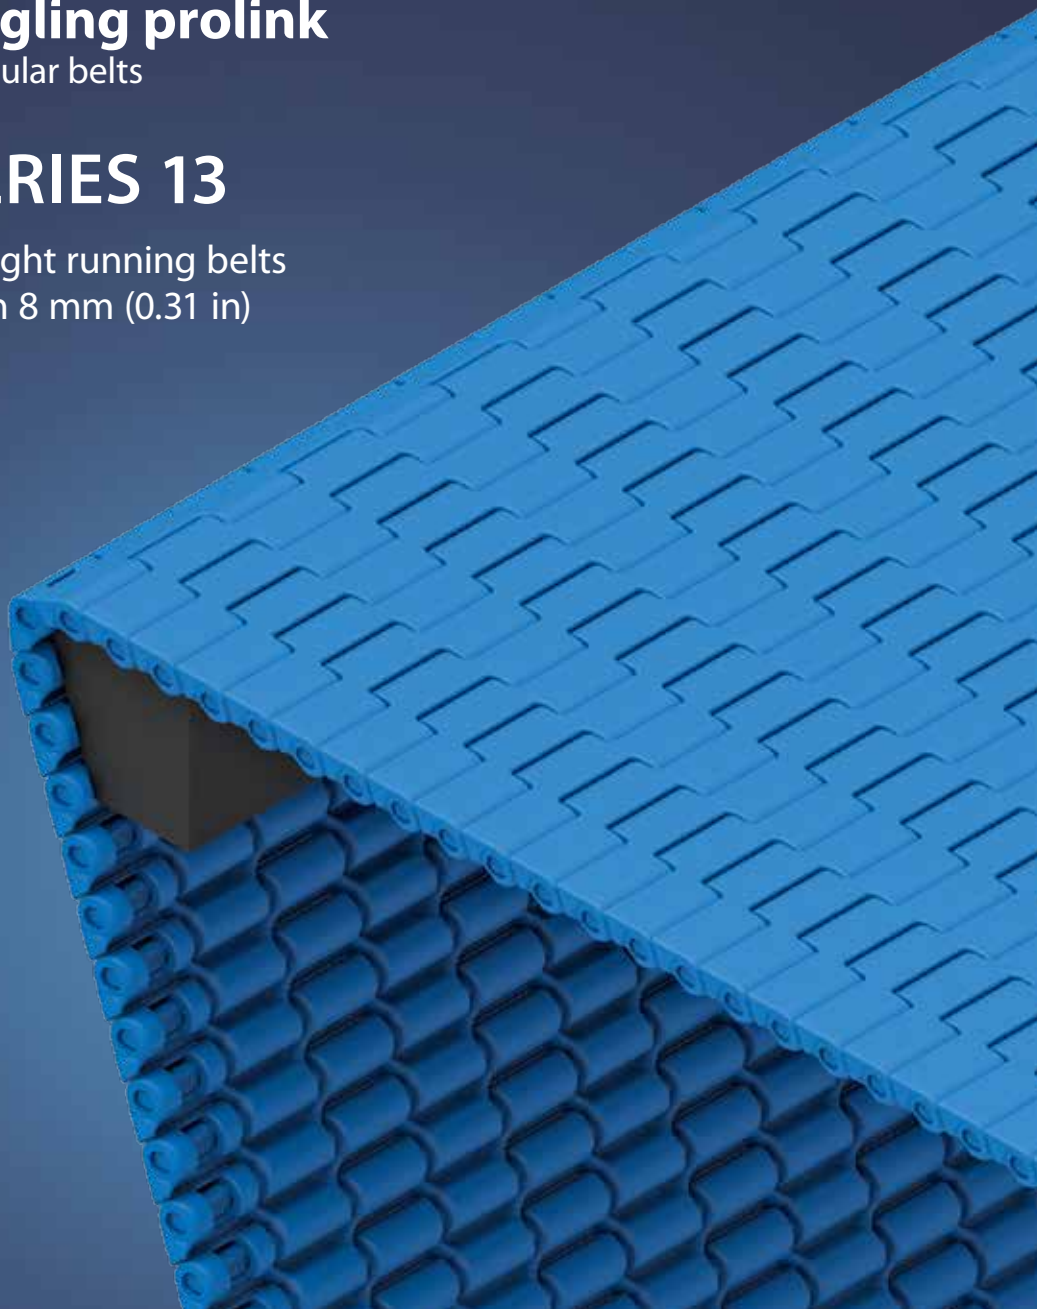


# SERIES 13 | OVERVIEW

**siegling prolink**  
modular belts

Straight running belts | Pitch 8 mm (0.31 in)

## Belts for light-duty food and non-food nose bar applications

### Side view scale 1:1




### Design characteristics

- Micro pitch belt with small transfer gaps
- Designed to run over nosebars/knife edges or rollers with a radius down to 3 mm (0.12 in) allowing, precise transfer of even the smallest products
- Versatile for conveying, drying and cooling applications
- Optimal design of sprocket teeth, and belt underside provides superior sprocket engagement, safe belt tracking and favorable cleanability
- Belt and sprocket design ensures superior load transmission and belt pull capacity
- Headless pin making it very easy to install and remove the belt for maintenance

### Basic data

Pitch	8 mm (0.31 in)
Belt width min.	102 mm (4 in)
Width increments	25.4 mm (1 in)
Hinge pins	3 mm (0.12 in) made of plastic (PLX)

### Available surface pattern and opening area

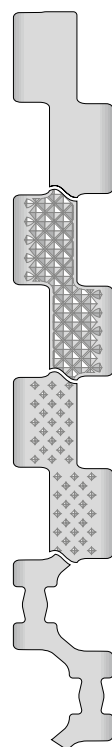

#### S13-0 FLT

Closed, smooth surface

#### S13-0 NPY

Closed surface with negative pyramid pattern

#### S13-0 CTP

Closed surface and pointed studs

#### S13-34 FLT

Open (34%), smooth surface



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)


### Sprockets

In different sizes with round or square bore




### Detail hinge pin

Headless pin with unique shoulder design ensures trouble free installation, maintenance and a secure pin retention

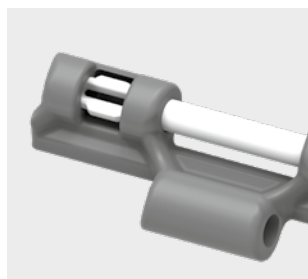

### Detail nose bar

Narrow transfer gap ensures smooth transfer of small and delicate products

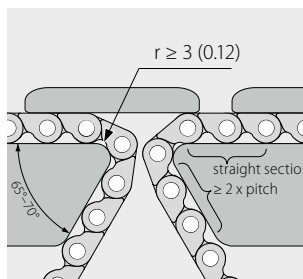

### ProSnap

Quick-Release for easy opening and closing of the belt





# SERIES 13 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 8 mm (0.31 in)

## S13-0 FLT | 0% Opening | Flat top

Closed, smooth surface | Flat top surface

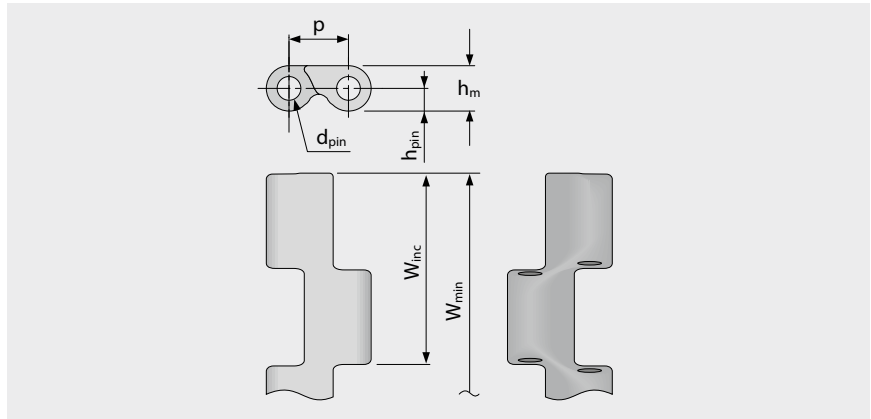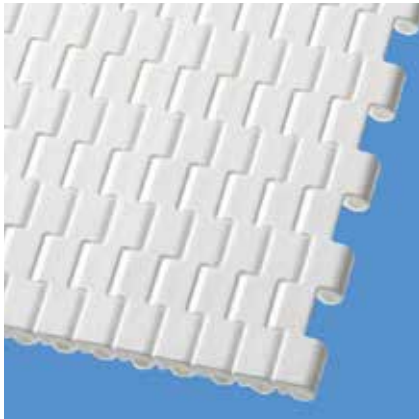

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	8.0	3.0	6.0	3.0	0.0	101.6	25.4	±0.2	–	3.0	16.0	24.0	8.0
inch	0.31	0.12	0.24	0.12	0.0	4.0	1.0	±0.2	–	0.12	0.63	0.94	0.31

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	WT	PLX	BL	4	274	5.9	1.21	0.23	-45/90	-49/194	●	●	●
POM	BL	PLX	BL	4	274	5.9	1.21	0.23	-45/90	-49/194	●	●	●
PA*	BL	PLX	BL	4	274	5.1	1.04	1.38	-40/120	-40/248	●	●	●

#### Mold to order belts

PA*	LG	PLX	BL	4	274	5.1	1.04	1.38	-40/120	-40/248	●	●	●
PA-HT	BL	PA-HT	UC	4	274	5.7	1.17	1.77	-30/155	-22/311	●	●	●
PXX-HC	BK	PLX	BL	2	137	5.2	1.07	0.89	5/100	41/212	–	–	

Mold to width available in: 102 mm (4.0 in), 152 mm (6.0 in), 203 mm (8.0 in), 305 mm (12.0 in)

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BK (Black), ■ BL (Blue), ■ LG (Light gray), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





# SERIES 13 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 8 mm (0.31 in)

## S13-0 NPY | 0% Opening | Negative pyramid

Closed surface with negative pyramid pattern | Provides superb release characteristics when conveying wet or sticky products | 61 % contact area

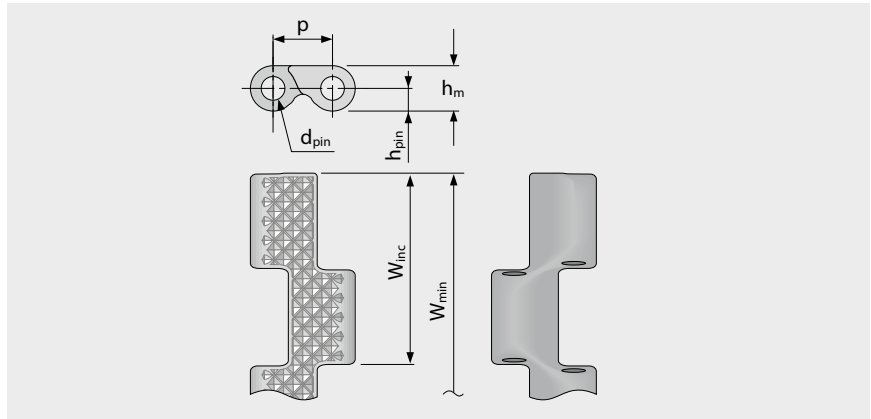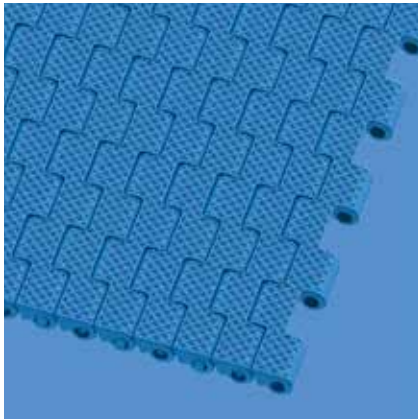

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	8.0	3.0	6.0	3.0	0.0	101.6	25.4	±0.2	–	3.0	16.0	24.0	8.0
inch	0.31	0.12	0.24	0.12	0.0	4.0	1.0	±0.2	–	0.12	0.63	0.94	0.31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PLX	BL	4	274	5.9	1.21	0.23	-45/90	-49/194	●	●	●

Mold to width available in: 102 mm (4.0 in), 152 mm (6.0 in), 203 mm (8.0 in), 305 mm (12.0 in)

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 13 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 8 mm (0.31 in)

## S13-0 CTP | 0% Opening | Cone top (pointed studs)

Closed surface and pointed studs | Cone top surface pattern for superior grip

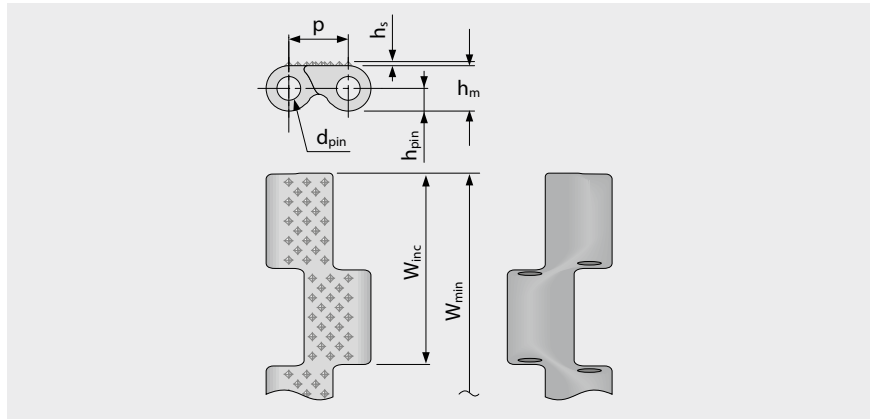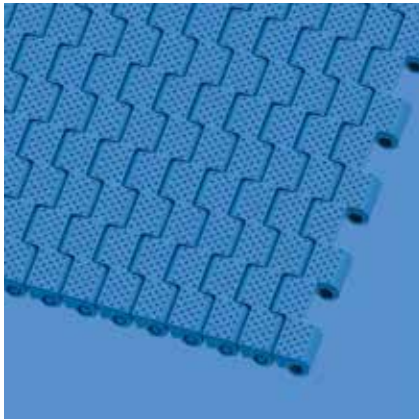

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	8.0	3.0	6.0	3.0	0.4	101.6	25.4	±0.2	–	3.0	16.0	24.0	8.0
inch	0.31	0.12	0.24	0.12	0.02	4.0	1.0	±0.2	–	0.12	0.63	0.94	0.31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PLX	BL	4	274	5.9	1.21	0.23	-45/90	-49/194	●	●	●
PA*	BL	PLX	BL	4	274	5.1	1.04	1.38	-40/120	-40/248	●	●	●

Mold to width available in: 305 mm (12.0 in)

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 13 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 8 mm (0.31 in)

## S13-34 FLT | 34 % Opening | Flat top

Open area (34%) for excellent air circulation and drainage | 47% contact area (Largest opening: 11.4 x 4.6 mm/0.45 x 0.18 in);  
Smooth surface | Easy-to-clean

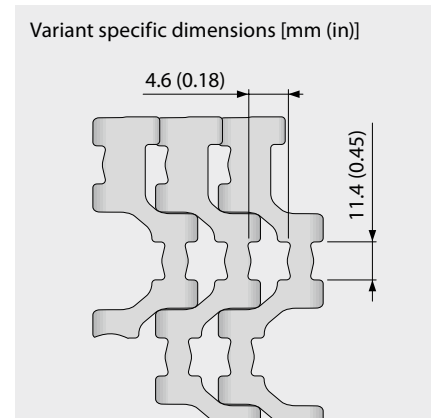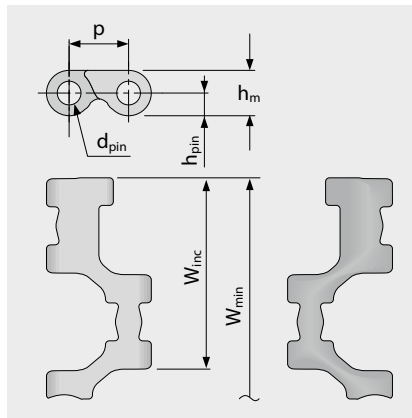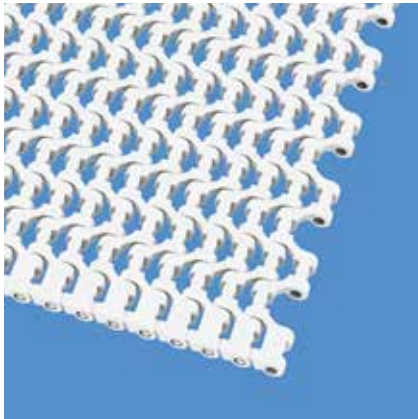

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	8.0	3.0	6.0	3.0	0.0	101.6	25.4	±0.2	–	3.0	16.0	24.0	8.0
inch	0.31	0.12	0.24	0.12	0.0	4.0	1.0	±0.2	–	0.12	0.63	0.94	0.31

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	WT	PLX	BL	4	274	4.3	0.88	0.23	-45/90	-49/194	●	●	●
POM	BL	PLX	BL	4	274	4.3	0.88	0.23	-45/90	-49/194	●	●	●
PA*	BL	PLX	BL	4	274	3.7	0.76	1.38	-40/120	-40/248	●	●	●
Mold to order belts													
PA-HT	BL	PA-HT	UC	4	274	4.2	0.86	1.38	-30/155	-22/311	●	●	●

Mold to width available in: 305 mm (12.0 in)

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





MOVEMENT SYSTEMS

# SERIES 13 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 8 mm (0.31 in)

## S13 SPR | Sprockets

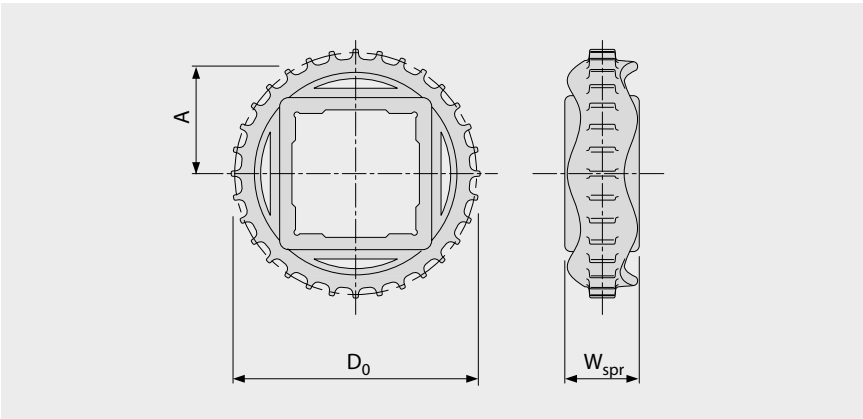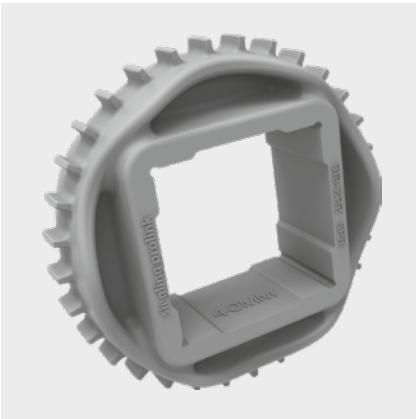

### Main dimensions

Sprocket size (Number of teeth)		Z15	Z24	Z32	Z36	Z48
W <sub>spr</sub>	mm	25.0	25.0	25.0	25.0	25.0
	inch	0.98	0.98	0.98	0.98	0.98
D <sub>0</sub>	mm	39.1	62.3	82.9	93.2	124.2
	inch	1.54	2.45	3.26	3.67	4.89
A <sub>max</sub>	mm	16.6	28.2	38.5	43.6	59.1
	inch	0.65	1.11	1.52	1.72	2.33
A <sub>min</sub>	mm	16.2	27.9	38.3	43.4	59.0
	inch	0.64	1.10	1.51	1.71	2.32

### Shaft bores (● = Round, ■ = Square)

20	mm	● / ■				
25	mm		● / ■	●		
30	mm		■			
40	mm			■	■	■
0.75	inch	●				
1	inch		● / ■	●		
1.5	inch			■		■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
For detailed sprocket and shaft dimensions see appendix 6.3  
Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS




# SERIES 13 | PROSNAP

Straight running belt | Pitch 8 mm (0.31 in)

**siegling prolink**  
modular belts

## S13-0 FLT PSP | ProSnap

Quick-Release for easy, quick and toolless opening and closing of the belt | One pin solution for entire belt width


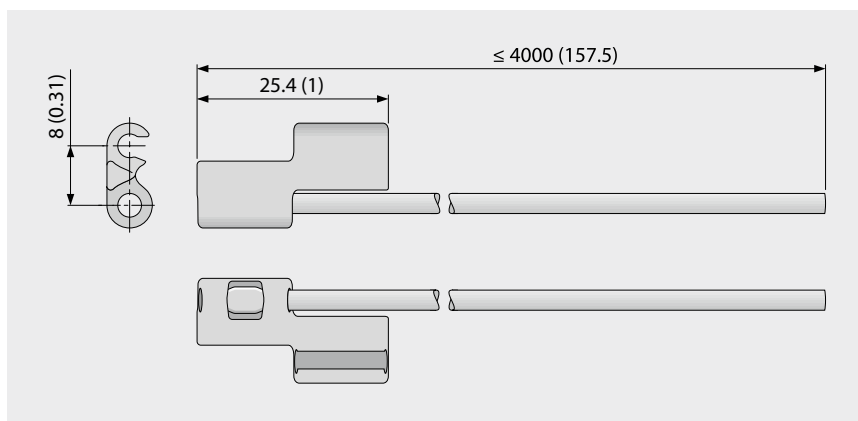


### Basic data

Material	Color	Pin material/length	
		≤ 610 mm (24 inch)	> 610 mm (24 inch) ≤ 4000 mm (157 inch)
POM	LB	PLX	PBT

Mold to order belts			
POM-MD	BL	PLX	PBT

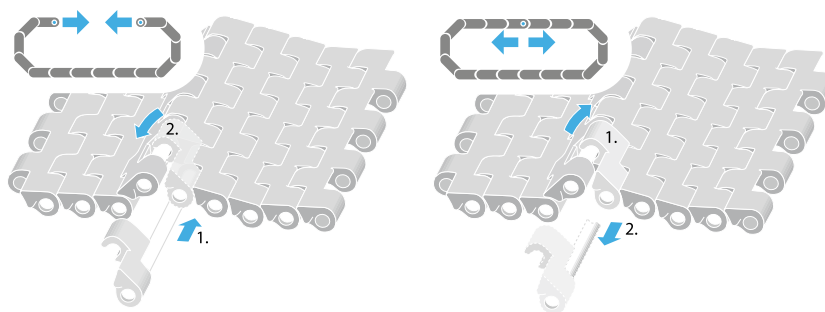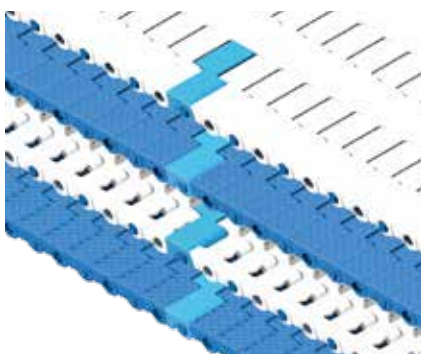

■ BL (Blue), ■ LB (Light blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 14**

Straight running belts  
Pitch 12.7 mm (0.50 in)

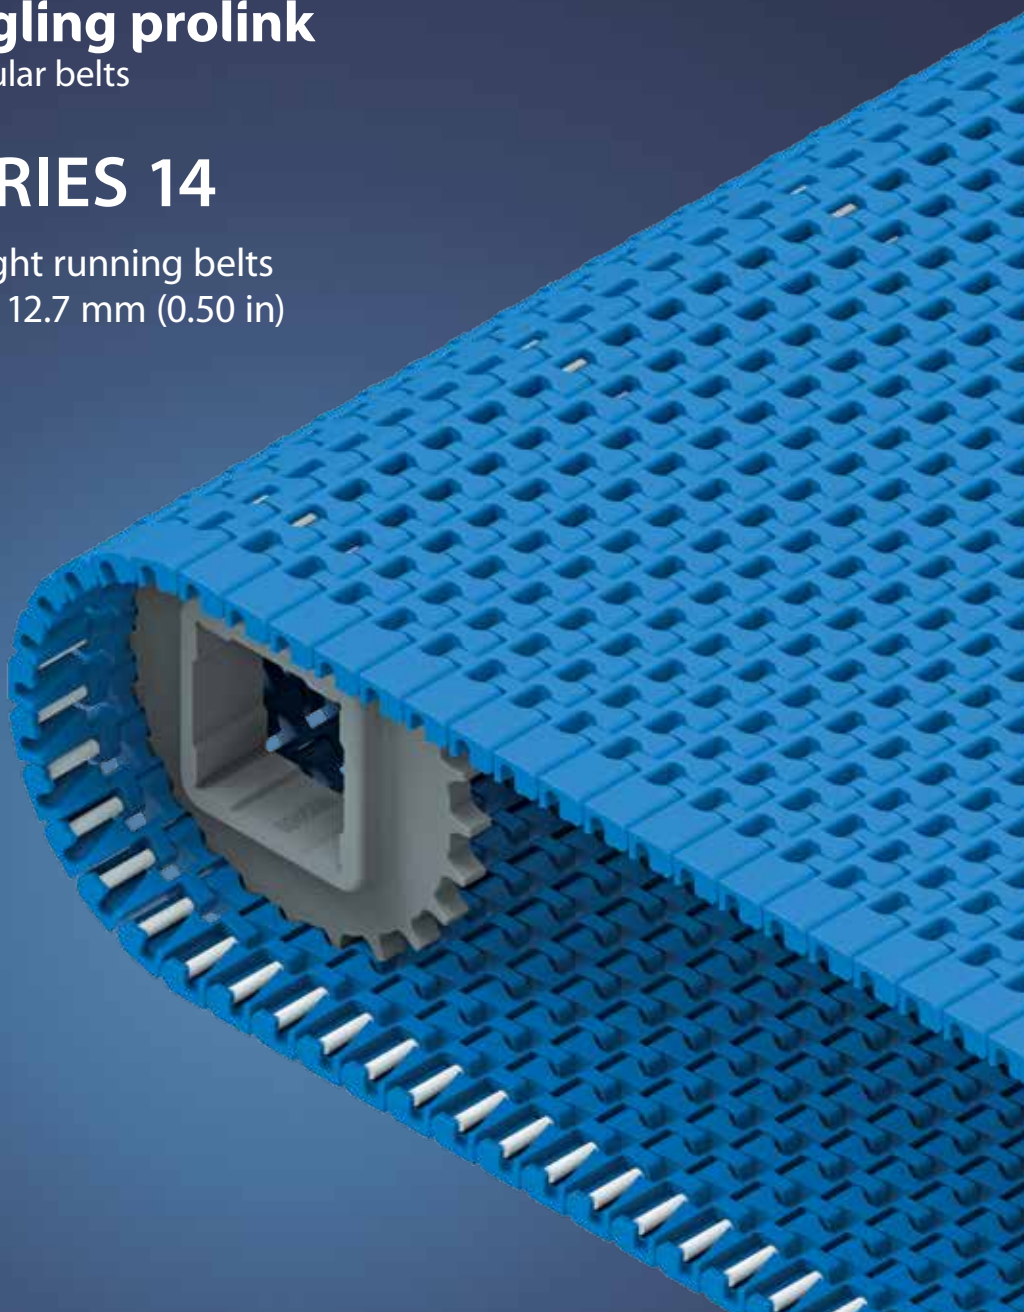


# SERIES 14 | OVERVIEW

**siegling prolink**  
modular belts

Straight running belts | Pitch 12.7 mm (0.50 in)

Belts for medium-duty food and non-food applications

## Side view scale 1:1




### Design characteristics

- Mini pitch belt with small transfer gap
- Robust design guarantees superior durability and high belt pull capacity
- Design for smooth run on 19 mm (0.75 in) nose bar
- Headless pin system making it easy to install and remove the belt for maintenance
- Closed, solid belt edge to prevent belt edge damages

### Basic data

Pitch	12.7 mm (0.50 in)
Belt width min.	76.2 mm (3.0 in)
Width increments	12.7 mm (0.50 in)
Hinge pins	3.4 mm (0.13 in) made of plastic (PP, PBT, PE). One-piece up to a belt width of 4000 mm (157.5 in).

## Available surface pattern and opening area

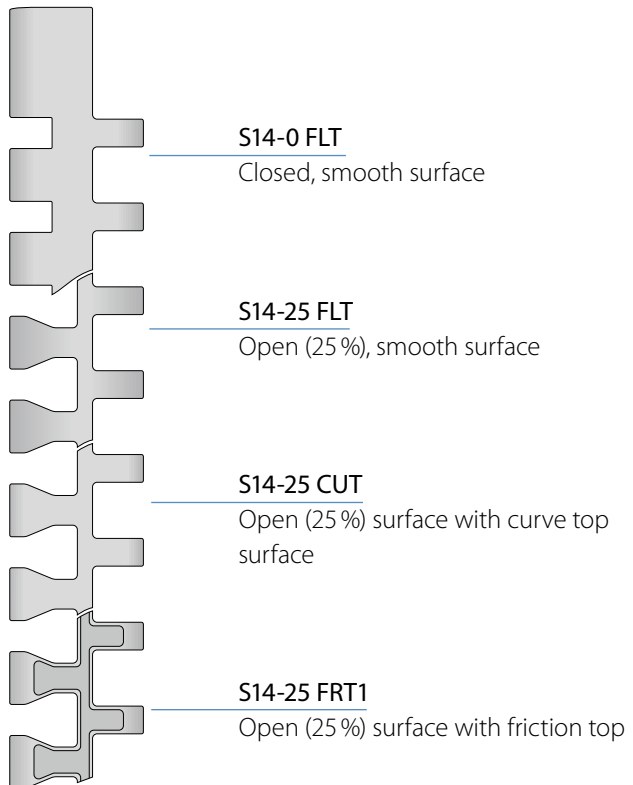

Certified

NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)


### Sprockets

in different sizes with round or square bore




### Profiles

in different heights and designs for inclines

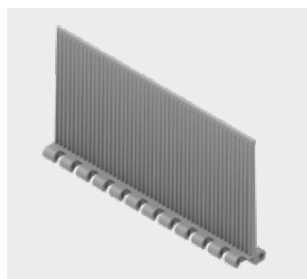

### Detail hinge pin

Headless one-piece pin with unique retention system ensures trouble free installation and maintenance

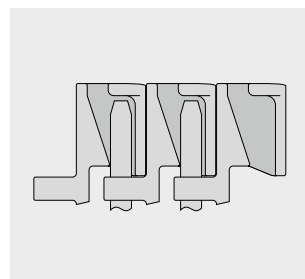



# SERIES 14 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14-0 FLT | 0% Opening | Flat top

Closed, smooth surface | Flat top surface

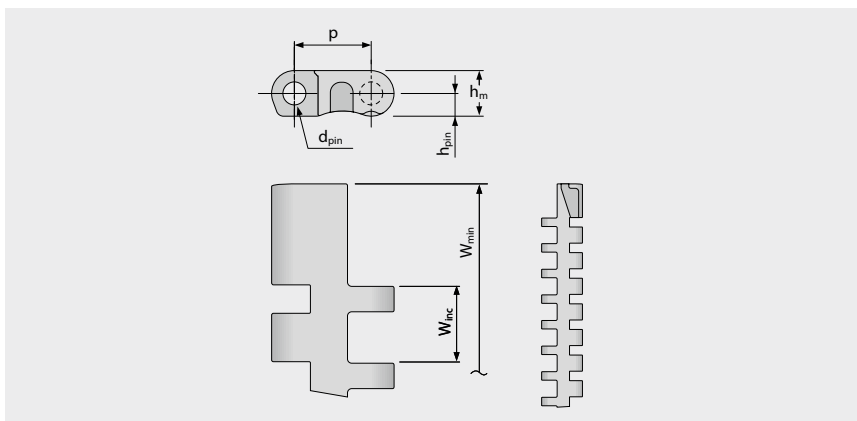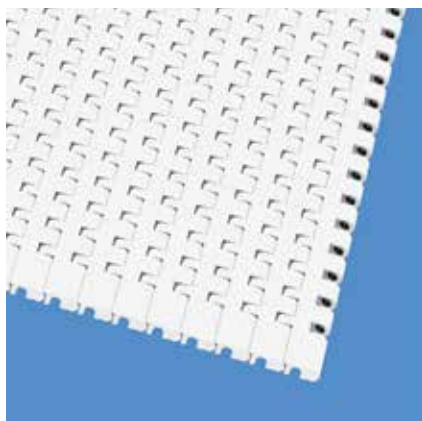

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.5	3.8	0.0	76.2	12.7	±0.20	–	9.5	25.4	38.1	12.7
inch	0.5	0.13	0.3	0.15	0.0	3.0	0.5	±0.20	–	0.38	1.0	1.5	0.5

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	UC	24	1645	7.5	1.41	0.0	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	24	1645	7.5	1.41	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	WT	9	617	4.8	1.0	0.43	5/100	41/212	●	●	●
PP	WT	PP	WT	9	617	4.8	1.0	0.43	5/100	41/212	●	●	●
PE	BL	PE	WT	6.5	445	5.0	0.96	-0.13	-70/65	-94/149	●	●	●
PE	WT	PE	WT	6.5	445	5.0	0.96	-0.13	-70/65	-94/149	●	●	●

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 14 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14-25 FLT | 25 % Opening | Flat top

Open version (25 %) for excellent air circulation and drainage | 52 % contact area (Largest opening: 8.2 x 2.7 mm/0.32 x 0.11 in) | Smooth surface

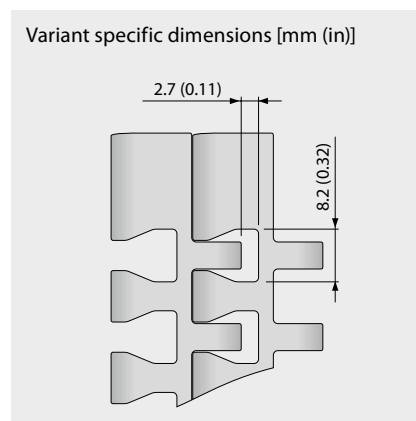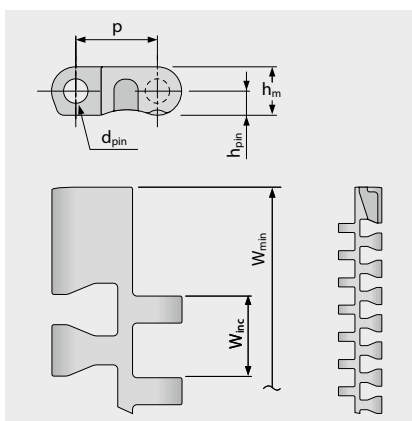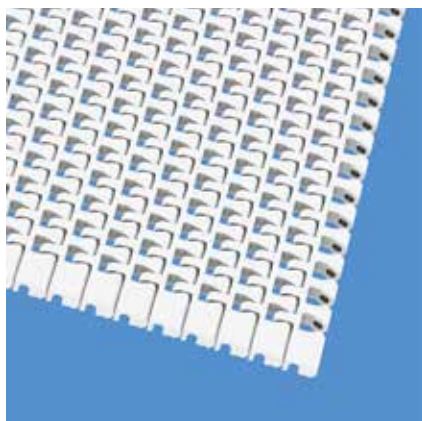

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.5	3.8	0.0	76.2	12.7	±0.20	–	9.5	25.4	38.1	12.7
inch	0.5	0.13	0.3	0.15	0.0	3.0	0.5	±0.20	–	0.38	1.0	1.5	0.5

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	UC	24	1645	7.0	1.41	0.0	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	24	1645	7.0	1.41	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	WT	9	617	4.5	1.0	0.43	5/100	41/212	●	●	●
PP	WT	PP	WT	9	617	4.5	1.0	0.43	5/100	41/212	●	●	●
PE	BL	PE	WT	6.5	445	4.7	0.96	-0.13	-70/65	-94/149	●	●	●
PE	WT	PE	WT	6.5	445	4.7	0.96	-0.13	-70/65	-94/149	●	●	●

#### Mold to order belts

PA*	BL	PBT	UC	22	1507	5.8	1.19	0.92	-40/120	-40/248	●	●	●
-----	----	-----	----	----	------	-----	------	------	---------	---------	---	---	---

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 14 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14-25 CUT | 25 % Opening | Curved top

Open version (25 %) for excellent air circulation and drainage | 26 % contact area (Largest opening: 8.2 x 2.7 mm/0.32 x 0.11 in) | Curved top

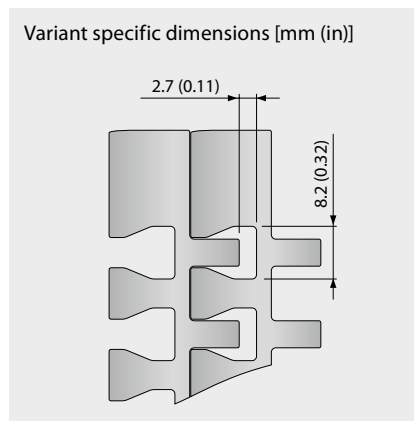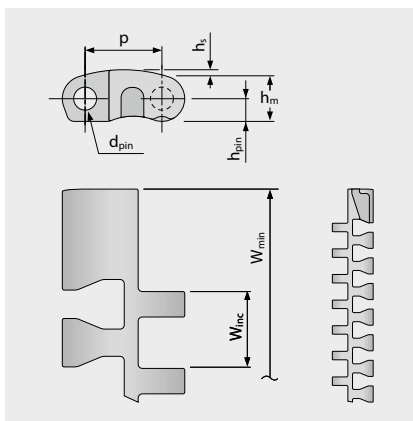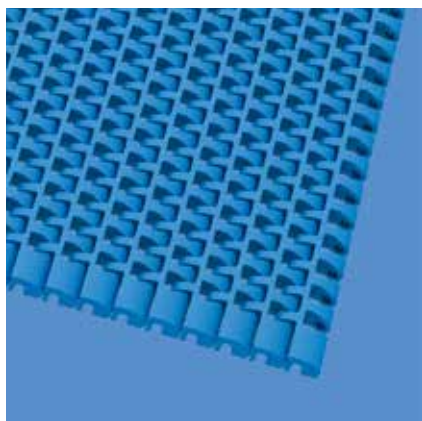

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.5	3.8	1.1	76.2	12.7	±0.20	–	9.5	25.4	38.1	12.7
inch	0.5	0.13	0.3	0.15	0.04	3.0	0.5	±0.20	–	0.38	1.0	1.5	0.5

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	UC	24	1645	7.3	1.5	0.0	-45/90	-49/194	●	●	●
PP	BL	PP	WT	9	617	4.8	0.98	0.43	5/100	41/212	●	●	●

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS






# SERIES 14 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14-25 FRT1 | 25 % Opening | Friction top (Design 1)

Open version (25 %) for excellent air circulation and drainage with flat integrated friction pads (FRT1) for high grip | 32 % contact area | Version only available without FRT1 structure at the side (17 mm indent)

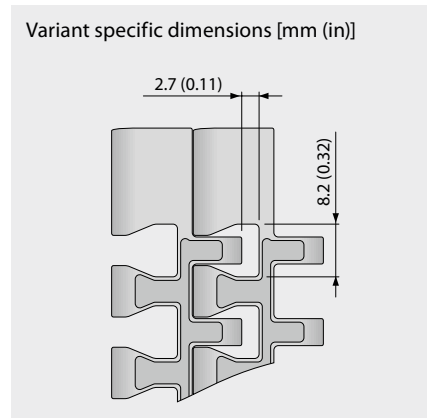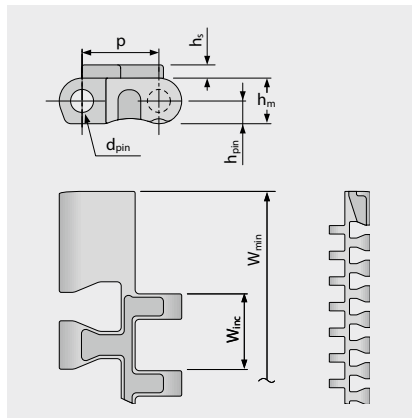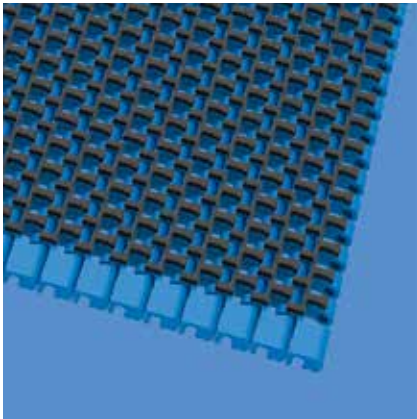


### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.5	3.8	2.2	76.2	12.7	±0.20	–	9.5	25.4	38.1	12.7
inch	0.5	0.13	0.3	0.15	0.09	3.0	0.5	±0.20	–	0.38	1.0	1.5	0.5

### Available standard materials <sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	BL	PP	WT	R7	BK	9	617	5.1	1.05	0.43	5/100	41/212	●	●	
PP	WT	PP	WT	R7	BG	9	617	5.1	1.05	0.43	5/100	41/212	●	●	

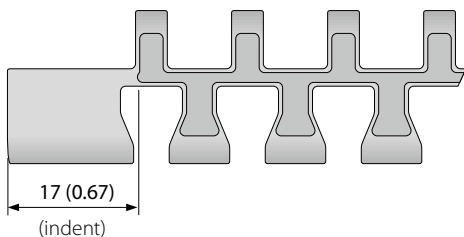

■ BG (Beige), ■ BK (Black), ■ BL (Blue), ■ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS





# SERIES 14 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14 SPR | Sprockets

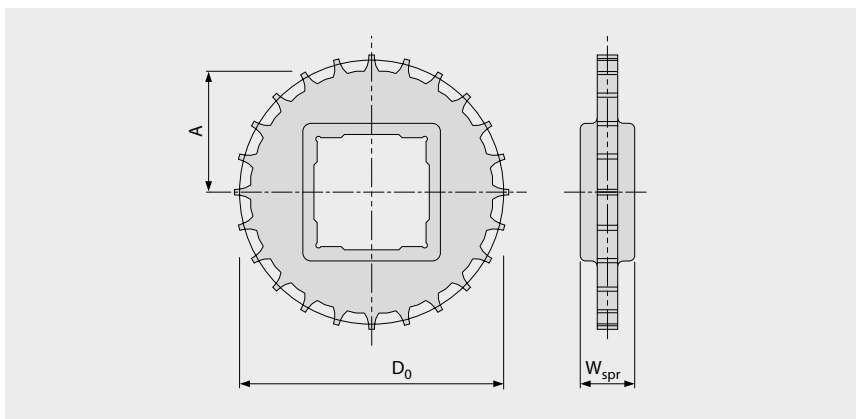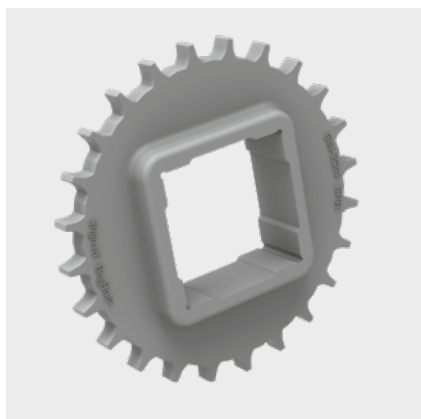

### Main dimensions

Sprocket size (Number of teeth)		Z12	Z15	Z19	Z24	Z28	Z36
W <sub>spr</sub>	mm	20.0	20.0	20.0	20.0	20.0	20.0
	inch	0.79	0.79	0.79	0.79	0.79	0.79
D <sub>0</sub>	mm	50.0	62.3	78.7	99.2	115.7	148.7
	inch	1.97	2.45	3.10	3.91	4.56	5.85
A <sub>max</sub>	mm	21.3	27.4	35.6	45.9	54.1	70.6
	inch	0.84	1.08	1.40	1.81	2.13	2.78
A <sub>min</sub>	mm	20.5	26.8	35.1	45.5	53.7	70.3
	inch	0.81	1.06	1.38	1.79	2.11	2.77

### Shaft bores (● = Round, ■ = Square)

20	mm	●					
25	mm		● / ■		● / ■	●	
30	mm				●		
40	mm			■	■	■	■
60	mm						■
0.75	inch	●					
1	inch		● / ■		●	●	
1.25	inch				●		
1.5	inch			■	■	■	■
2.5	inch						■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS


# SERIES 14 | PROFILES

Straight running belt | Pitch 12.7 mm (0.50 in)

**siegling prolink**  
modular belts

## S14-0 FLT/NCL PMC


No cling surface to improve release of wet and sticky products and Flat top surface for dry products

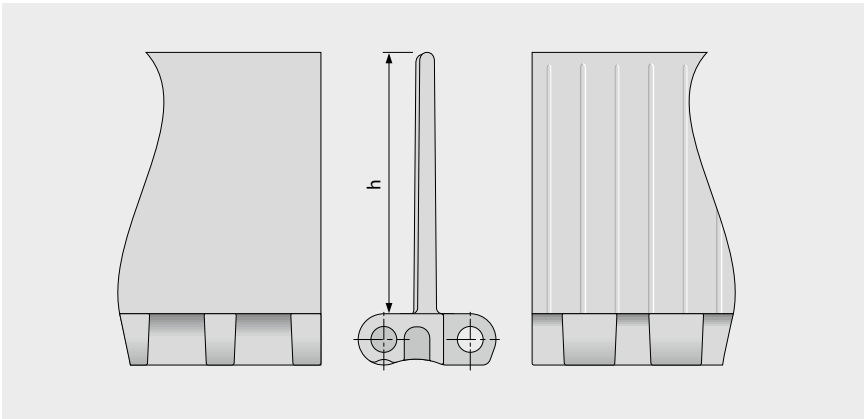

### Basic data

Material	Color	Height (h)	
		25 mm 1 inch	76 mm 3 inch
PE	BL	●	●
PE	WT	●	●
POM	BL	●	●
POM	WT	●	●
PP	BL	●	●
PP	WT	●	●

Molded width: 152 mm (6.0 in)

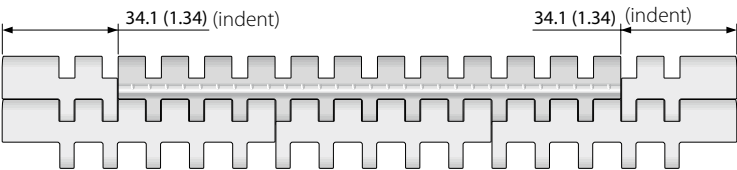

Standard configuration S14-0 PMC

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.





MOVEMENT SYSTEMS

# SERIES 14 | PRR

Straight running belt | Pitch 12.7 mm (0.50 in)

## S14-25 PRR | Pin Retained Rollers

For applications where low back pressure accumulation or product separation is required

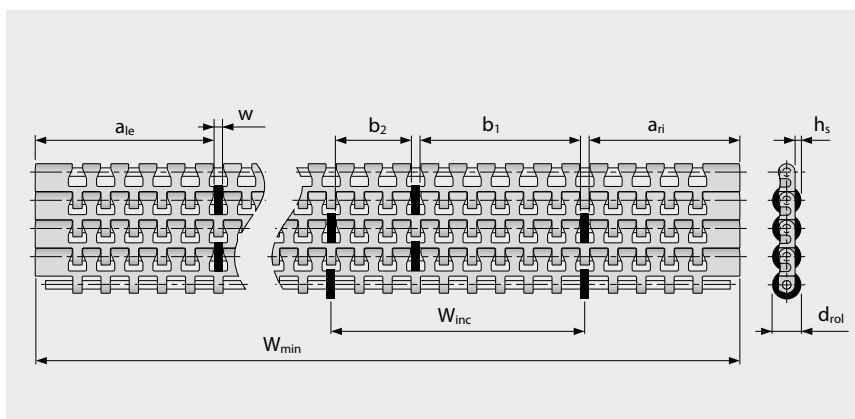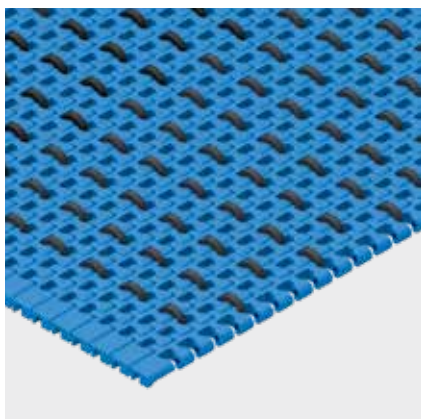

- For low back pressure wearstrips are to be positioned between the rollers
- For product separation the wearstrips are to be positioned below the rollers
- For all materials and surfaces
- Rollers available in POM BK

### Dimensions

<b>w</b>	3.9 mm (0.15 in)	Roller cut out width
<b>h<sub>s</sub></b>	2.25 mm (0.09 in)	Height of rollers above surface
<b>d<sub>rol</sub></b>	13.2 mm (0.52 in)	Roller diameter
<b>a</b>	see config.	Indent of roller
<b>b</b>	see config.	Roller distance
<b>s</b>	n × S <sub>min</sub>	Roller spacing in travel direction (standard: n = 1)
<b>S<sub>min</sub></b>	12.7 mm (0.5 in)	Min. roller spacing in travel direction
<b>W<sub>inc</sub></b>	see config.	Width increment
<b>W<sub>min</sub></b>	see config.	Min. belt width
<b>W<sub>B</sub></b>		Belt width
<b>n<sub>rol</sub></b>		Number of rollers across belt width

### Allowable belt pull

To determine admissible belt pull calculate effective belt width  $W_{B,ef}$  by

$$W_{B,ef} = W_B - (w \times n_{rol})$$

Example:

$$W_B = 432 \text{ mm (17.0 in); } w = 3.9 \text{ mm (0.15 in); } n_{rol} = 7$$

$$W_{B,ef} = 432 - (3.9 \times 7) = 404.7 \text{ mm}$$

$$W_{B,ef} = 17 - (0.15 \times 7) = 16 \text{ in}$$

Note: Sprocket must not be placed inline with rollers. Deviation in roller spacing possible, please get in contact to customer service. Coefficient of friction between belt and conveyed product in accumulation mode  $\mu_{acc} = 0.04$ , i.e. the accumulation pressure is approx. 4% of the weight of the backed up product.

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS

# SERIES 14 | PRR

Straight running belt | Pitch 12.7 mm (0.50 in)


siegling prolink  
modular belts

## S14-25 PRR | Pin Retained Rollers


Standard configurations and main data

	Min. belt width – $W_{min}$		Width increment – $W_{inc}$		Roller distance – b		Indent of roller – a				Roller/m <sup>2</sup> (e.g. 18 in belt width)
	[mm]	[in]	[mm]	[in]	[mm]	[in]	left		right		
Config. 1	228.6	9	114.3	4.5	76.2/38.1	3/1.5	67.9	2.67	80.6	3.17	600
Config. 2	127	5	50.8	2	25.4	1	42	1.65	55	2.17	1400
Config. 3	127	5	76.2	3	38.1	1.5	42	1.65	42	1.65	990


Configuration 1

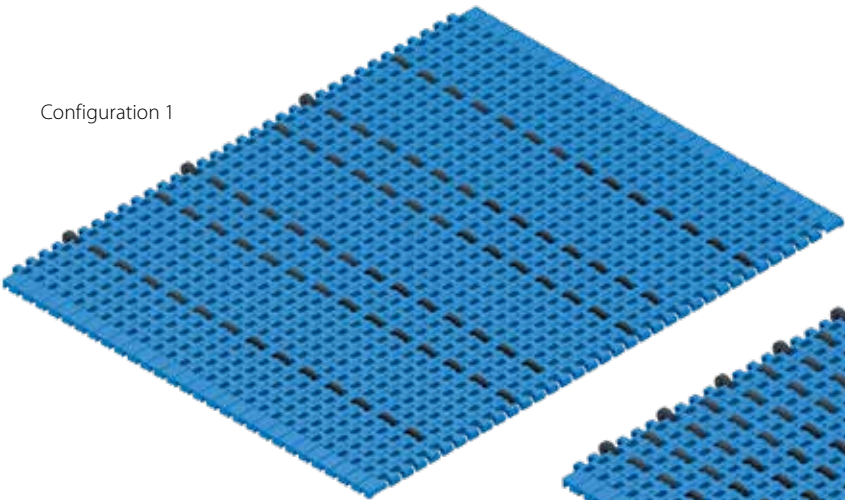

Configuration 2

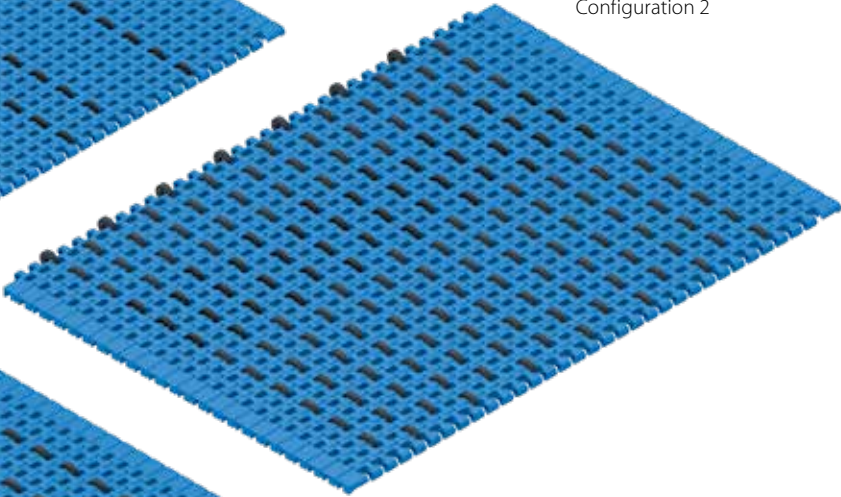

Configuration 3

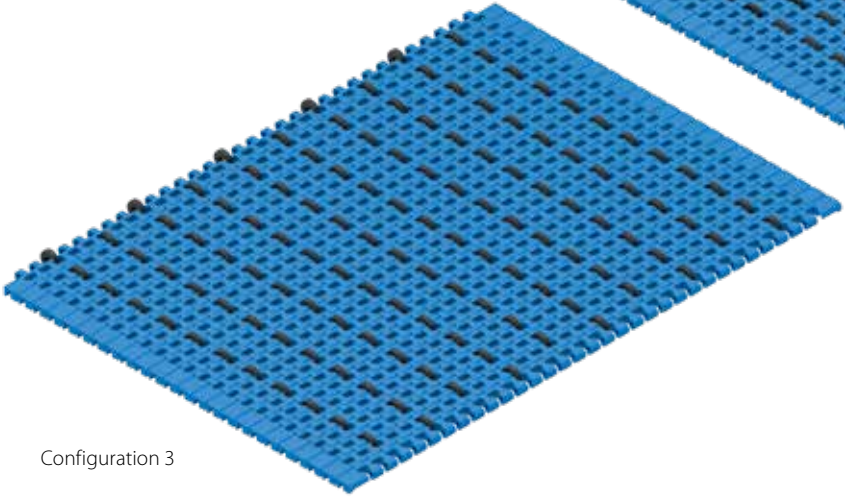


## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 15**

Straight running belts  
Pitch 12.7 mm (0.50 in)

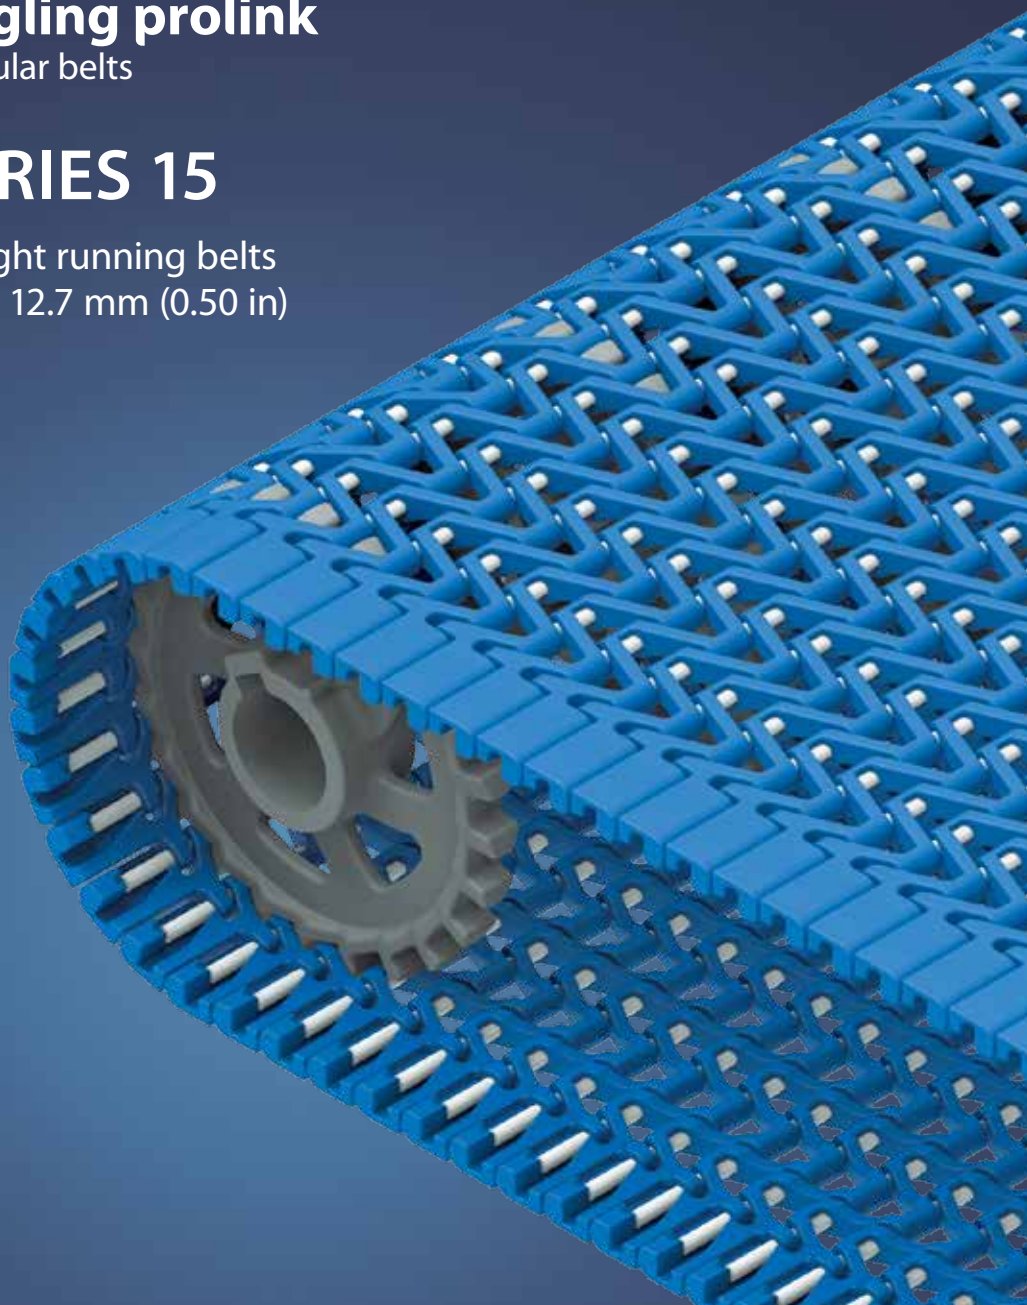




# SERIES 15 | OVERVIEW

**siebling prolink**  
modular belts

Straight running belts | Pitch 12.7 mm (0.50 in)

Belts for light-duty food applications utilizing 12.7 mm (0.5 in) nose bars

## Side view scale 1:1



## Design characteristics

- Mini-pitch belt with large open area for optimum airflow
- Scalloped underside facilitates smooth product transfer over a 12.7 mm (0.5 in) diameter nose bar.
- Open hinge for improved sanitation
- Narrow 25 mm (1 in) width increments offer superior support of conveyed products
- Solid and robust edge design incorporating improved pin retention
- Headless one-piece pin for easy installation and removal
- Sprockets with large solid tooth insures superior load transmission and long wear life

## Basic data


Pitch	12.7 mm (0.50 in)
Belt width min.	203.2 mm (8 in)
Width increments	25.4 mm (1 in)
Hinge pins	3.4 mm (0.13 in) made of plastic (PBT, PP). One-piece up to a belt width of 4000 mm (157.5 in).

## Sprockets

in different sizes with round  
or square bore



## Available surface pattern and opening area

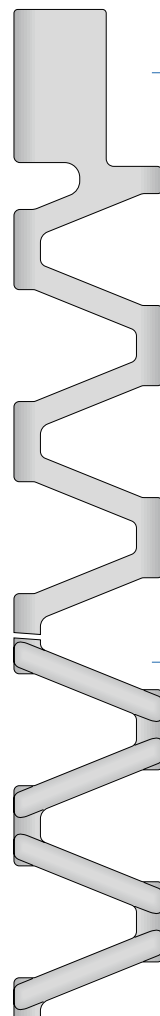

### S15-47 GRT

Open (47 %), lattice-shaped surface

### S15-47 RSA

Open (47 %), lattice-shaped surface  
with reduced surface area



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)




# SERIES 15 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.5 in)

## S15-47 GRT | 47 % Opening | Grid top

Open area (47 %) for excellent air circulation and drainage | 31 % contact area (Largest opening:  $\varnothing = 8.5 \text{ mm}/0.33 \text{ in}$ ) |  
Smooth surface | Easy-to-clean

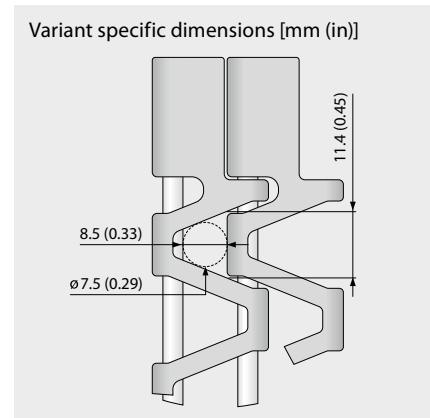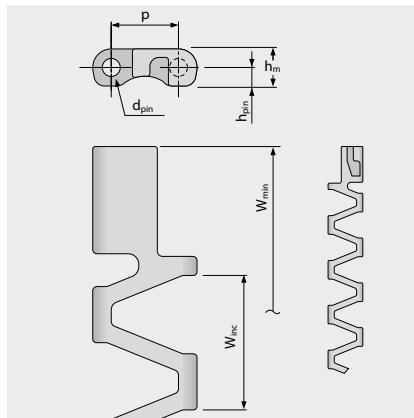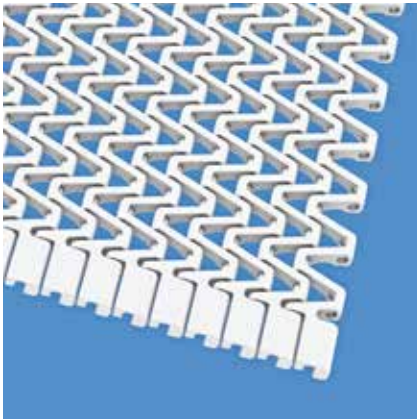

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.0	3.5	–	203.2	25.4	±0.20	–	6.4	25.4	38.1	12.7
inch	0.5	0.13	0.28	0.14	–	8.0	1.0	±0.20	–	0.25	1.0	1.5	0.5

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	UC	5	343	4.3	0.88	-0.4	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	5	343	4.3	0.88	-0.4	-45/90	-49/194	●	●	●
PP	BL	PP	WT	2.5	171	2.8	0.58	-1.0	5/100	41/212	●	●	●
PP	WT	PP	WT	2.5	171	2.8	0.58	-1.0	5/100	41/212	●	●	●
PA*	BL	PBT	UC	4.5	308	3.7	0.75	0.4	-40/120	-40/248	●	●	●

#### Mold to order belts

PP	BL	PBT	UC	2.8	192	2.8	0.58	-1.0	5/100	41/212	●	●	●
PP	WT	PBT	UC	2.8	192	2.8	0.58	-1.0	5/100	41/212	●	●	●

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request








# SERIES 15 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 12.7 mm (0.5 in)

## S15-47 RSA | 47 % Opening | Reduced surface area

Open area (47 %) for excellent air circulation and drainage | 20% contact area (Largest opening:  $\varnothing = 8.5$  mm/0.33 in) | Smooth surface | Easy-to-clean

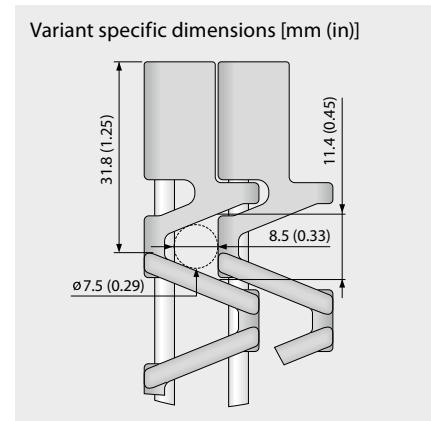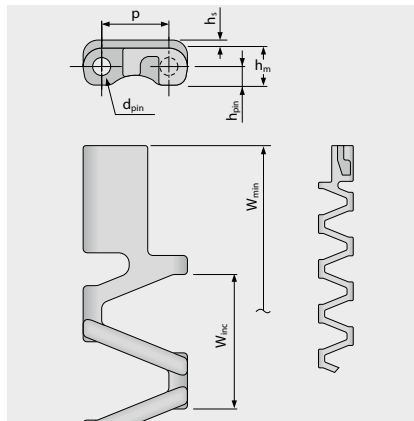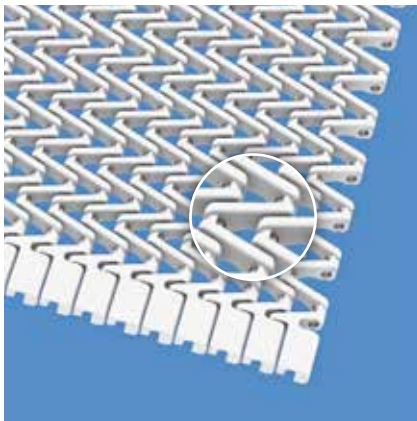

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	12.7	3.4	7.0	3.5	1.5	203.2	25.4	±0.20	–	6.4	25.4	38.1	12.7
inch	0.5	0.13	0.28	0.14	0.06	8.0	1.0	±0.20	–	0.25	1.0	1.5	0.5

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	BL	PBT	UC	5	343	5.2	1.07	-0.4	-45/90	-49/194	●	●	●
POM	WT	PBT	UC	5	343	5.2	1.07	-0.4	-45/90	-49/194	●	●	●
PP	BL	PP	WT	2.5	171	3.4	0.7	-1.0	5/100	41/212	●	●	●
PP	WT	PP	WT	2.5	171	3.4	0.7	-1.0	5/100	41/212	●	●	●
PA*	BL	PBT	UC	4.5	308	4.5	0.91	0.4	-40/120	-40/248	●	●	●

Mold to order belts													
PP	BL	PBT	UC	2.8	192	3.4	0.7	-1.0	5/100	41/212	●	●	●
PP	WT	PBT	UC	2.8	192	3.4	0.7	-1.0	5/100	41/212	●	●	●

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ UC (Uncolored), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request




# SERIES 15 | SPROCKETS

Straight running belt | Pitch 12.7 mm (0.5 in)

**siegling prolink**  
modular belts

## S15 SPR | Sprockets

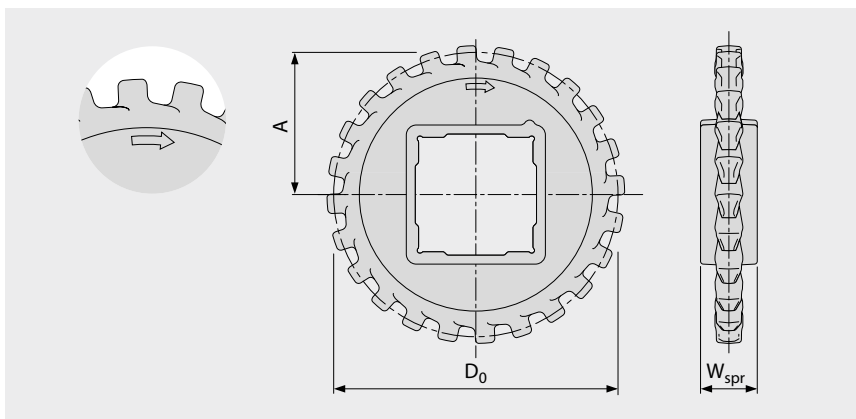

### Main dimensions

Sprocket size (Number of teeth)		Z12	Z14	Z17	Z19	Z24	Z36
W <sub>spr</sub>	mm	20.0	20.0	20.0	20.0	20.0	20.0
	inch	0.79	0.79	0.79	0.79	0.79	0.79
D <sub>0</sub>	mm	50.6	58.9	71.3	79.6	100.4	150.3
	inch	1.99	2.32	2.81	3.13	3.95	5.92
A <sub>max</sub>	mm	21.8	25.9	32.1	36.3	46.7	71.6
	inch	0.86	1.02	1.26	1.43	1.84	2.82
A <sub>min</sub>	mm	21.0	25.3	31.6	35.8	46.3	71.4
	inch	0.83	1.00	1.24	1.41	1.82	2.81

### Shaft bores (● = Round, ■ = Square)

20	mm		●	●			
25	mm	● / ■	●	●	● / ■	●	●
30	mm		●	●			
40	mm					■	■
0.75	inch		●	●			
1	inch	● / ■	● / ■	● / ■	● / ■	●	●
1.25	inch		●	●			
1.5	inch					■	■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS




## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 17**

Straight running belts  
Pitch 25.4 mm (1 in)

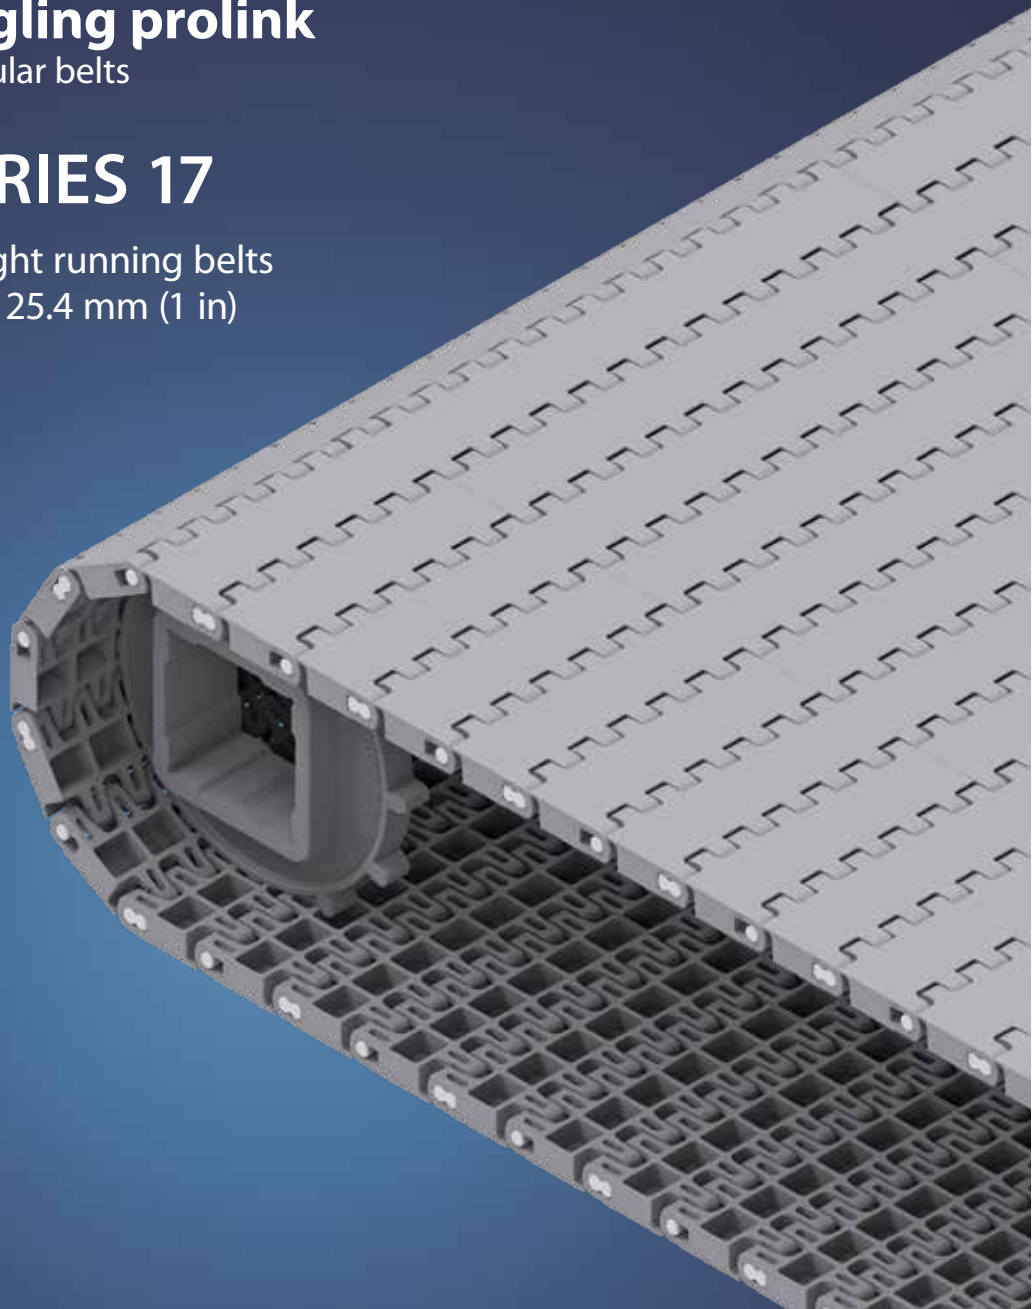


# SERIES 17 | OVERVIEW

**siegling prolink**  
modular belts

Straight running belts | Pitch 25.4 mm (1 in)

Medium to heavy-duty belts for industrial applications

Side view scale 1:1

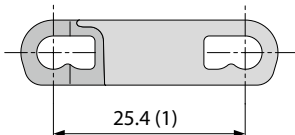


## Design characteristics

- Closed hinge design provides high belt pull capacity
- A rigid module design allows optimal utilization of belt pull capacity relative to belt weight
- Robust design guarantees durability
- Unique 'keyhole' pin retention system ensures easy pin removal
- Flame retardant version available (PXX-HC – in line with DIN EN 13501-1)

## Basic data

Pitch	25.4 mm (1 in)
Belt width min.	76.2 mm (3 in)
Width increments	12.7 mm (0.5 in)
Hinge pins	4.2 mm (0.17 in) made of plastic (PBT, PP)

Available surface pattern and opening area

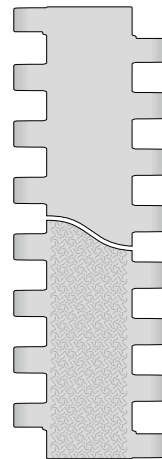

### S17-0 FLT


Closed, smooth surface

### S17-0 SRS

Closed, slip-resistant surface


## Sprockets

in different sizes with round or square bore

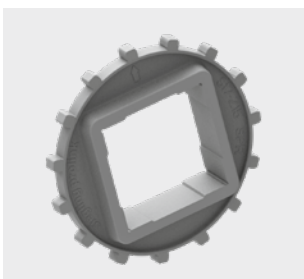

## Profiles

for inline conveyors

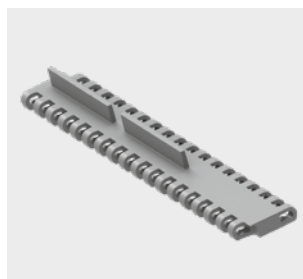



# SERIES 17 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17-0 FLT | 0 % Opening | Flat top

Closed, smooth surface | Flat top surface

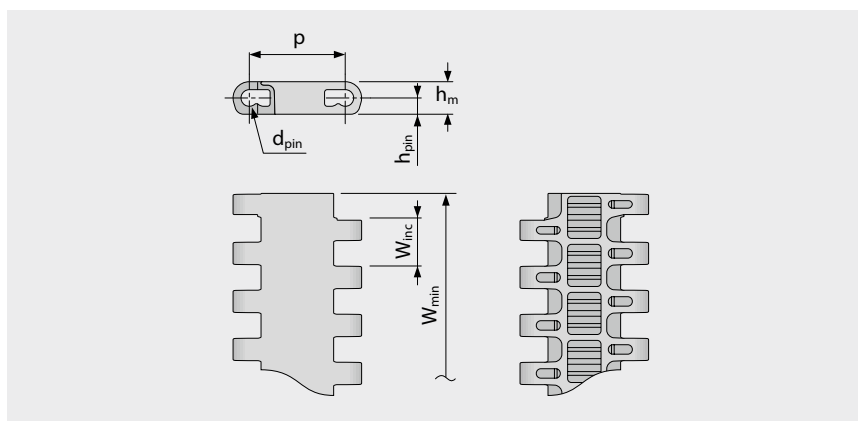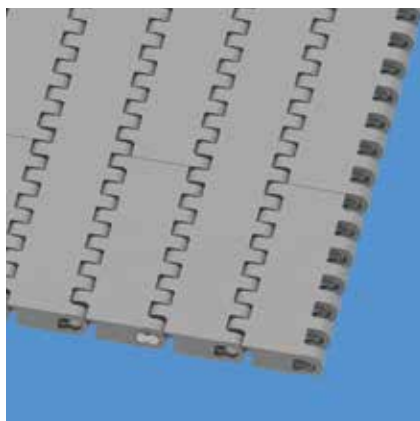

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	8.6	4.3	0.0	76.2	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.34	0.17	0.0	3.0	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM	LG	PBT	UC	32	2193	6.5	1.33	-0.09	-45/90	-49/194	●	●	●
POM	BL	PBT	UC	32	2193	6.5	1.33	-0.09	-45/90	-49/194	●	●	●
PP	BL	PP	BL	18	1233	4.2	0.86	0.35	5/100	41/212	●	●	●

Mold to width available in: 76 mm (3.0 in), 229 mm (9.0 in)

■ BL (Blue), ■ LG (Light gray), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 17 | BELT TYPES

siebling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17-0 SRS | 0% Opening | Slip-resistant surface

Closed surface | Slip-resistant surface, pleasant to walk and kneel on

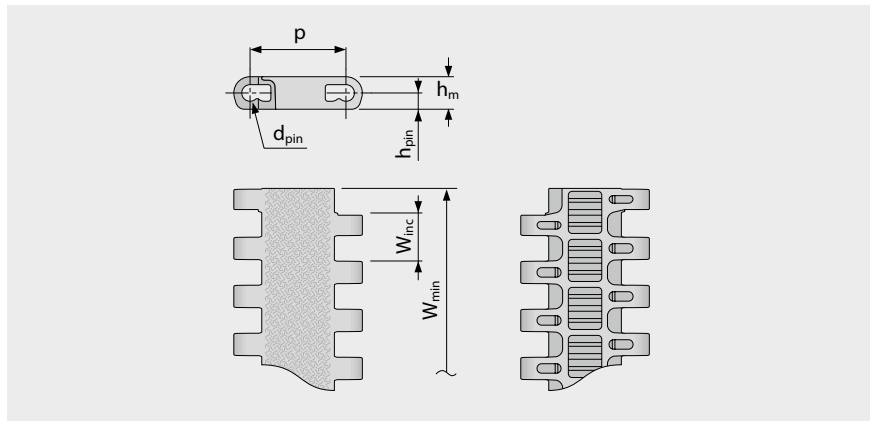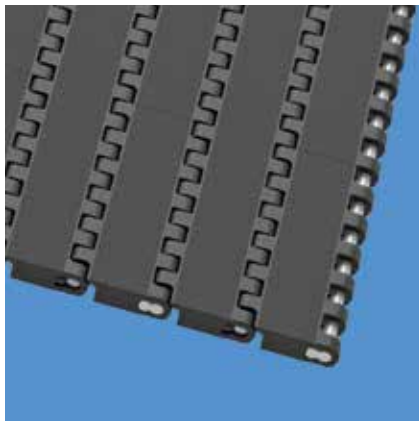

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	8.6	4.3	0.0	76.2	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.34	0.17	0.0	3.0	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Mold to order belts <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	Flame retardant
PXX-HC	BK	PBT	UC	14	822	5.7	1.17	0.35	5/100	41/212	●

Mold to width available in: 76 mm (3.0 in), 229 mm (9.0 in)

■ BK (Black), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS





# SERIES 17 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17 SPR | Sprockets

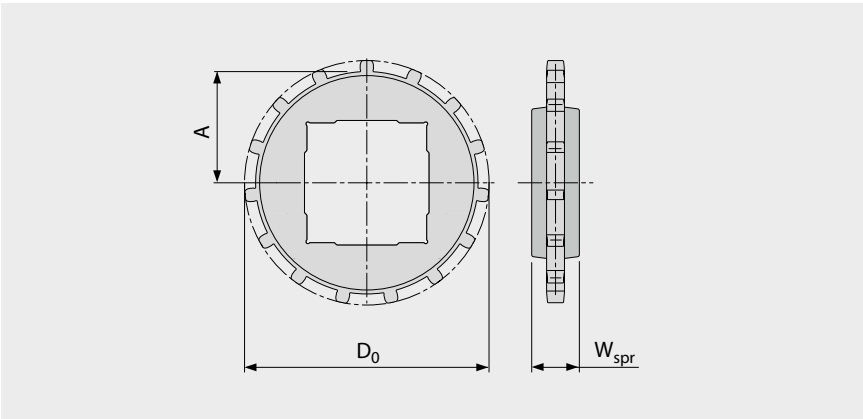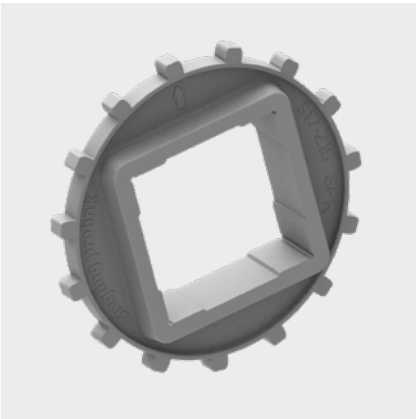

### Main dimensions

Sprocket size (Number of teeth)		Z12	Z15	Z18	Z19
W <sub>spr</sub>	mm	24.0	24.0	24.0	24.0
	inch	0.94	0.94	0.94	0.94
D <sub>0</sub>	mm	99.7	123.2	148.0	156.1
	inch	3.93	4.85	5.83	6.15
A <sub>max</sub>	mm	45.8	57.4	70.0	73.9
	inch	1.80	2.26	2.76	2.91
A <sub>min</sub>	mm	44.0	56.0	68.7	72.7
	inch	1.73	2.20	2.70	2.86

### Shaft bores (● = Round, ■ = Square)

30	mm	●			
40	mm	■		● / ■	
60	mm		■	■	■
80	mm				■
1.25	inch	●			
1.5	inch	■		● / ■	
2.5	inch		■	■	■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
For detailed sprocket and shaft dimensions see appendix 6.3  
Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 17 | PROFILES

Straight running belt | Pitch 25.4 mm (1 in)

siegling prolink  
modular belts

## S17-0 FLT PMU I83


Lateral rib with indent 83 mm (3.3 in) to carry goods with small profiles

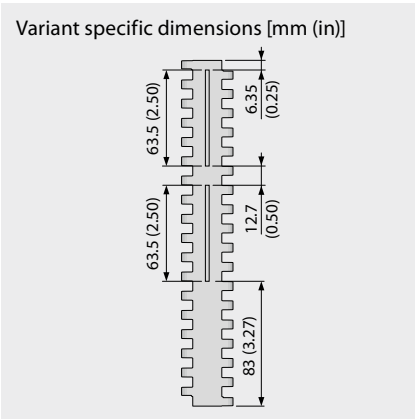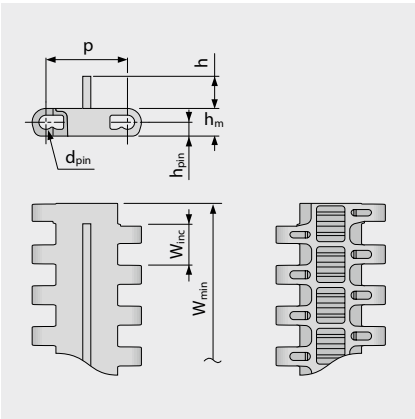

### Basic data

Material	Color	Height (h)
		10 mm 0.39 inch
POM	LG	●

Molded width: 228.6 mm (9.0 in)

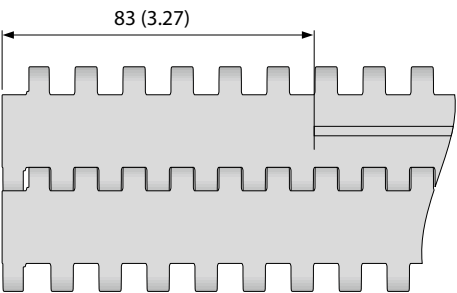

Standard configuration S17-0 FLT PMU I83

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS

## 1.2 DETAILED SERIES INFORMATION

**siegling prolink**  
modular belts

### **SERIES 18**

Side flexing and spiral belts  
Pitch 25.4 mm (1 in)

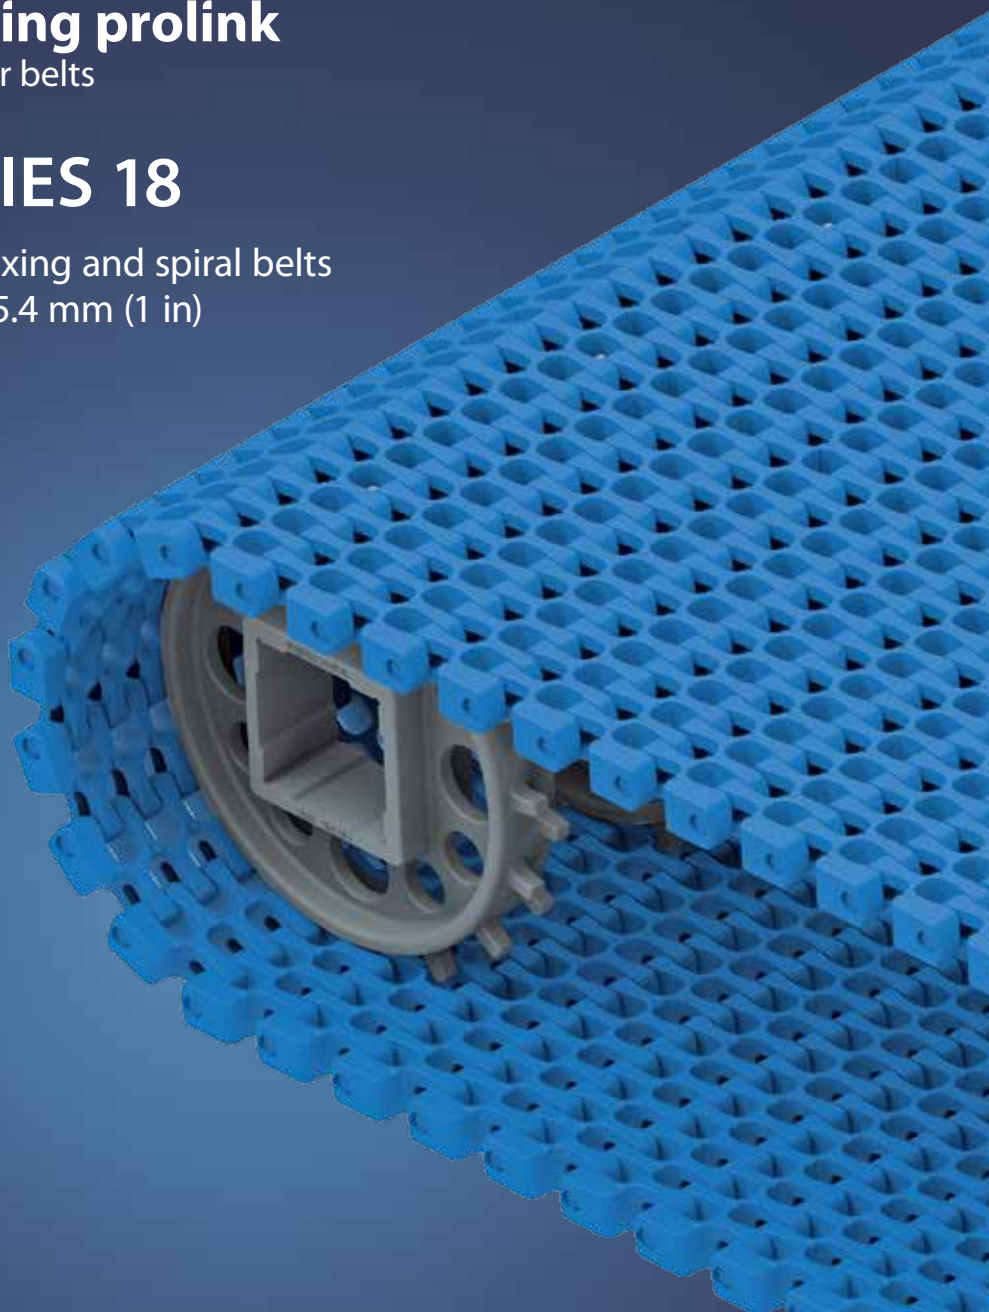


# SERIES 18 | OVERVIEW

**siebling prolink**  
modular belts

Side flexing and spiral belts | Pitch 25.4 mm (1 in)

## Belts for light to medium-duty food and non-food applications

### Side view scale 1:1

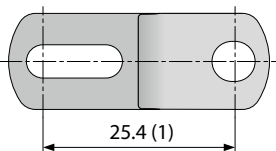

### Design characteristics

- All plastic light weight belt suitable for both straight and radius conveying
- 44% open area for excellent air circulation and drainage
- Narrow grid structure of the belt ensures secure handling of even small products
- High curve belt pull capacity offering improved capacity and reliability
- Easy to clean and suitable for conveying of food including direct food contact
- Superior lateral stiffness and rigidity for an all plastic belt

### Basic data

Pitch	25.4 mm (1 in)
Belt width min.	149.9 mm (5.9 in)
Belt width max.	1219 mm (48 in)
Width increments	12.7 mm (0.5 in)
Hinge pins	4.2 mm (0.17 in) made of plastic (PLX, PP). One-piece up to a belt width of 1219 mm (48 in).

### Sprockets

in different sizes with round or square bore




### Side guard

as lane divider to separate products




### Available surface pattern and opening area




#### S18-44 GRT (CW/CCW) 2.2

Open (44%), lattice-shaped surface




#### S18-44 GRT (CW/CCW) 2.2 G

Open (44%), lattice-shaped surface and Hold Down Tabs




#### S18-44 HDK (CW/CCW) 2.2

Open (44%), lattice-shaped surface and High Deck



#### S18-44 FRT1 (CW/CCW) 2.2

Open (44%), surface with friction top

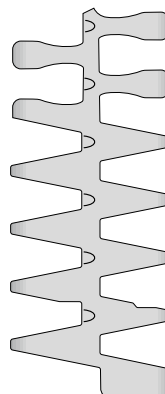

#### S18-44 GRT (CW/CCW) 1.7

Open (44%), lattice-shaped surface

#### S18-44 GRT CW 2.2/1.7

#### S18-44 GRT CCW 1.7/2.2

Open (44%), lattice-shaped surface  
CW = Clockwise (right hand curve)  
CCW = Counter Clockwise (left hand curve)  
(picture shows CCW)



NSF-compliant from these certified Forbo plants:  
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),  
Sydney/NSW (Australia), Pinghu (China), Shizuoka (Japan),  
Tlalnepantla (Mexico)




# SERIES 18 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 2.2$

## S18-44 GRT (CW/CCW) 2.2 | 44 % Opening | Grid top

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface | Collapse factor ( $C_c$ ) = 2.2 | running direction clockwise (cw) and counter clockwise (ccw)

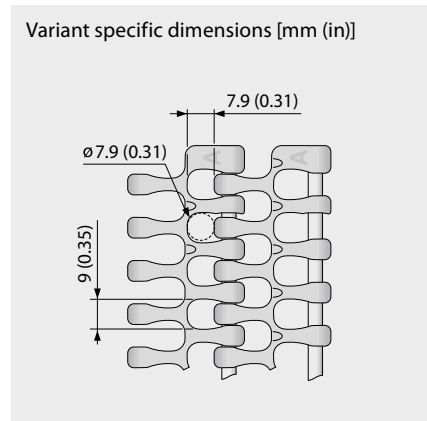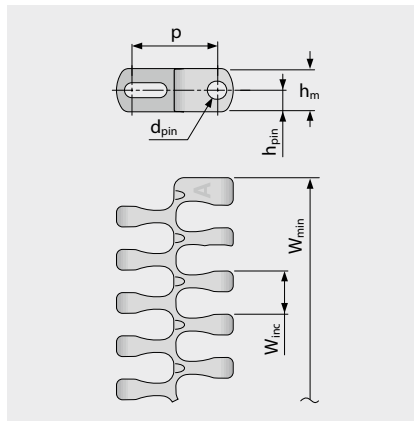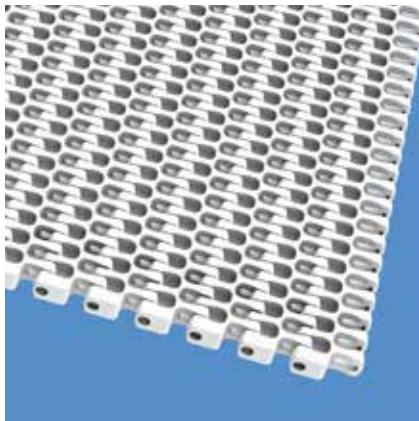

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.9	12.7	$\pm 0.2$	$2.2 \times W_B$	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.9	0.5	$\pm 0.2$	$2.2 \times W_B$	1.0	2.0	3.0	1.0

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●

### Mold to order belts

PA*	BL	PLX	BL	25	1713	1500	337	6.9	1.41	0.85	-40/120	-40/248	●	●	●
-----	----	-----	----	----	------	------	-----	-----	------	------	---------	---------	---	---	---

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# SERIES 18 | BELT TYPES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 2.2$

## S18-44 GRT (CW/CCW) 2.2 G | 44 % Opening | Grid top · guided

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface and Hold Down Tabs | Allows utilization of the entire belt width | Collapse factor ( $C_c$ ) = 2.2 | running direction clockwise (cw) and counter clockwise (ccw)

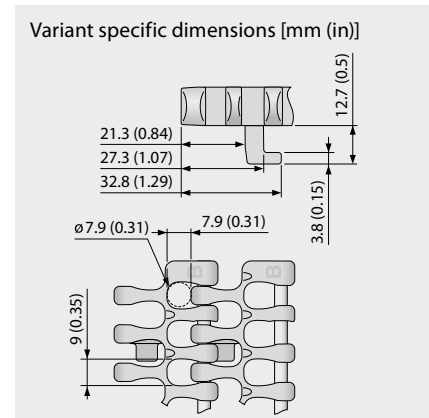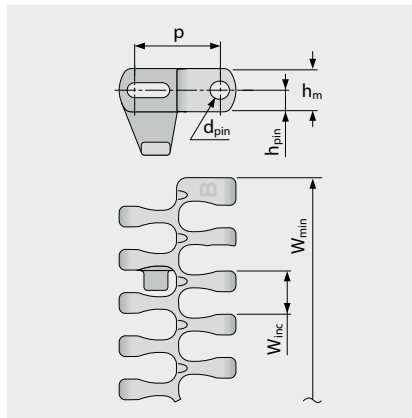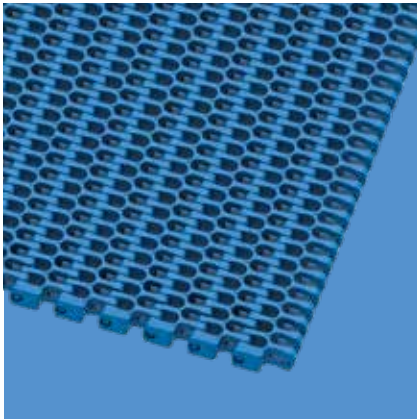

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.9	12.7	±0.2	$2.2 \times W_B$	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.9	0.5	±0.2	$2.2 \times W_B$	1.0	2.0	3.0	1.0

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve**		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●

Mold to order belts															
PA*	BL	PLX	BL	25	1713	1500	337	6.9	1.41	0.85	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH < 50 %). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

\*\* will be reduced by G-tab guiding (see chapter 3.3 conveyor layouts)

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller  
Attention: Restrictions on sprocket size and corresponding shaft options – please check sprocket data sheet

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request








# SERIES 18 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 2.2$

## S18-44 HDK (CW/CCW) 2.2 | 44 % Opening | High Deck

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface | Collapse factor ( $C_c$ ) = 2.2 | Allows utilization of the entire belt width and beyond | running direction clockwise (cw) and counter clockwise (ccw)

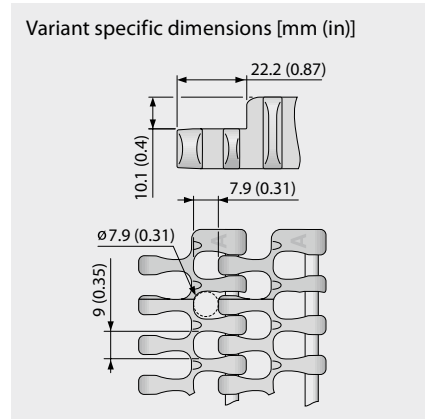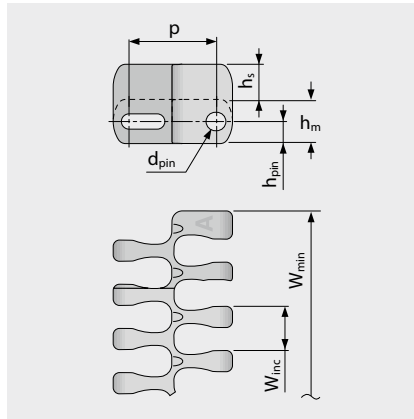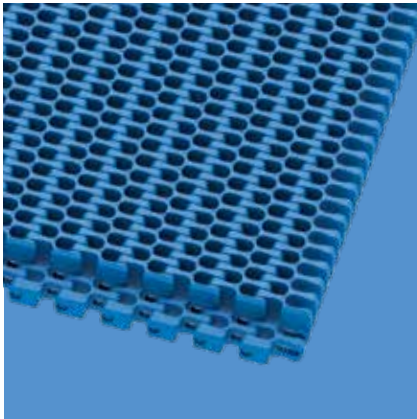

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	10.1	149.9	12.7	$\pm 0.2$	$2.2 \times W_B$	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.4	5.90	0.5	$\pm 0.2$	$2.2 \times W_B$	1.0	2.0	3.0	1.0

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials <sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	30	2056	1600	360	15.5	3.17	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	15.5	3.17	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	1000	225	10.3	2.11	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	1000	225	10.3	2.11	0.5	5/100	41/212	●	●	●
PP	BL	PP	WT	16	1096	800	180	10.2	2.09	0.5	5/100	41/212	●	●	●
PP	WT	PP	WT	16	1096	800	180	10.2	2.09	0.5	5/100	41/212	●	●	●
PA*	BL	PLX	BL	25	1713	1500	337	12.6	2.58	0.85	-40/120	-40/248	●	●	●

\* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request








# SERIES 18 | BELT TYPES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 1.7$

## S18-44 GRT (CW/CCW) 1.7 | 44 % Opening | Grid top

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface | Collapse factor ( $C_c$ ) = 1.7 | running direction clockwise (cw) and counter clockwise (ccw)

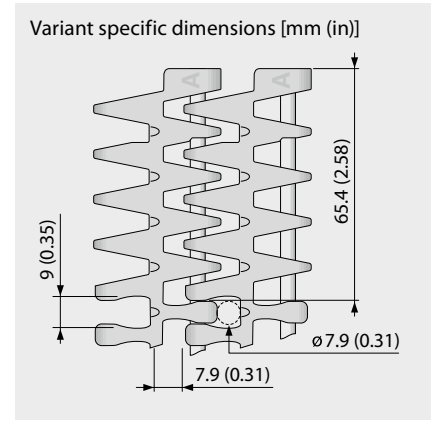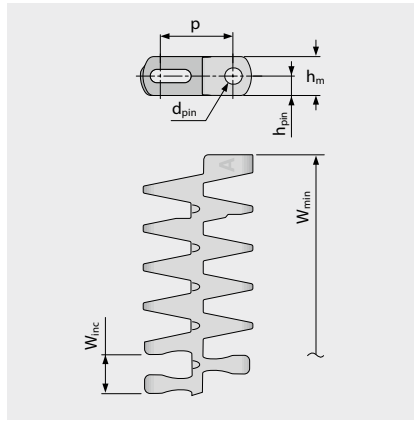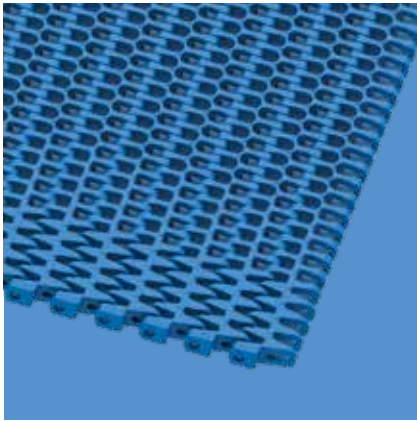

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin $\varnothing$	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 $C_c \times W_B$	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	175.3	12.7	$\pm 0.2$	$1.7 \times W_B$	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	6.9	0.5	$\pm 0.2$	$1.7 \times W_B$	1.0	2.0	3.0	1.0

$W_B$  = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, belt width curve < 403 mm (15.88 in)		Nominal belt pull, belt width curve $\geq 403$ mm (15.88 in)		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	25	1713	700	157	900	202	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	25	1713	700	157	900	202	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	400	90	700	157	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	400	90	700	157	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	BL	PP	WT	16	1096	400	90	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●
PP	WT	PP	WT	16	1096	400	90	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# SERIES 18 | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 2.2$

## S18-44 FRT1 (CW/CCW) 2.2 | 44 % Opening | Friction top (Design 1)

Open area (44%) with integrated friction pads (FRT1) for high grip | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Standard version without FRT-pads on belt edge (27.5 mm/1.08 in indent) | Collapse factor ( $C_c$ ) = 2.2 | running direction clockwise (cw) and counter clockwise (ccw)

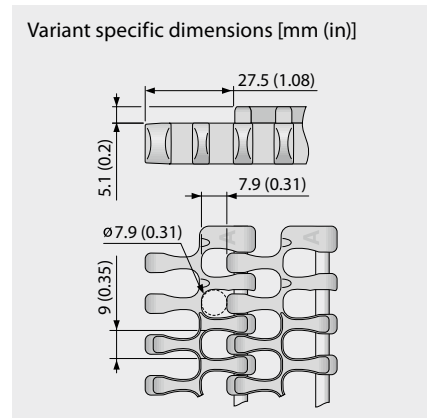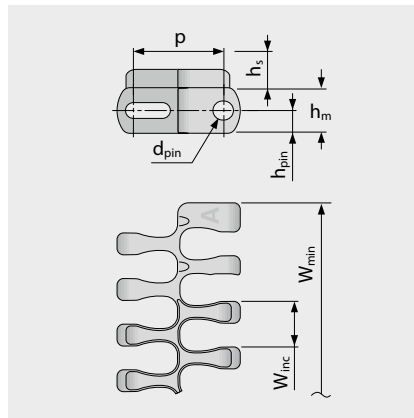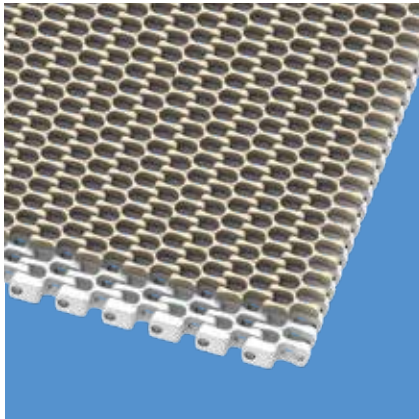

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	5.1	149.9	12.7	±0.2	2.2 x W <sub>B</sub>	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.20	5.90	0.5	±0.2	2.2 x W <sub>B</sub>	1.0	2.0	3.0	1.0

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Rubber		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
PP	BL	PLX	BL	R7	BL	18	1233	1000	225	8.80	1.80	0.5	5/100	41/212	●	●	
PP	WT	PLX	BL	R7	BG	18	1233	1000	225	8.80	1.80	0.5	5/100	41/212	●	●	
PP	BL	PP	WT	R7	BL	16	1096	600	135	8.60	1.76	0.5	5/100	41/212	●	●	
PP	WT	PP	WT	R7	BG	16	1096	600	135	8.60	1.76	0.5	5/100	41/212	●	●	

■ BG (Beige), ■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request



MOVEMENT SYSTEMS




# S18 COMBO | BELT TYPES

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 1.7$

## S18-44 GRT CW 2.2/1.7 | 44 % Opening | Grid top | Clockwise or right hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface | Collapse factor ( $C_c$ ) = 1.7 | running direction clockwise (cw) and counter clockwise (ccw)

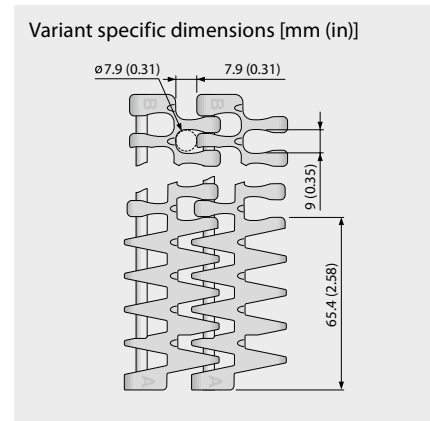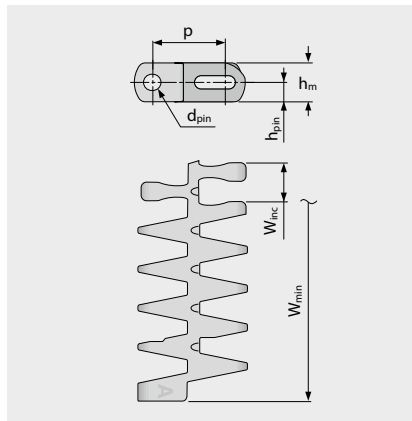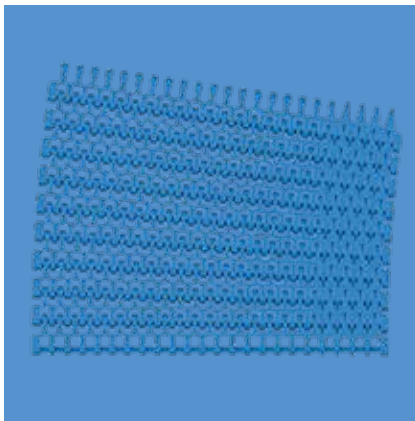

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.9	12.7	±0.2	1.7 x W <sub>B</sub>	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.90	0.5	±0.2	1.7 x W <sub>B</sub>	1.0	2.0	3.0	1.0

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m²]	[lb/ft²]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request






# S18 COMBO | BELT TYPES

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 1.7$

## S18-44 GRT CCW 1.7/2.2 | 44% Opening | Grid top | Counter clockwise or left hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening:  $\varnothing = 7.9$  mm/0.31 in) | Lattice-shape surface | Collapse factor ( $C_c$ ) = 1.7 | running direction clockwise (cw) and counter clockwise (ccw)

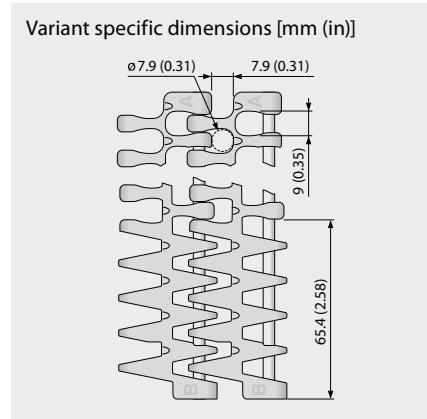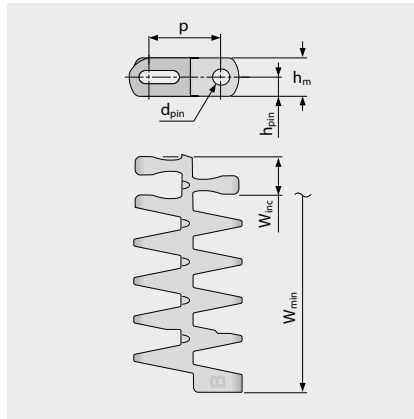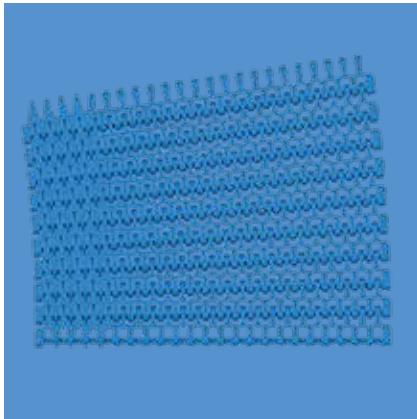

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness	Pin position	Height	Width min.	Width Increment	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.9	12.7	±0.2	1.7 x W <sub>B</sub>	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.90	0.5	±0.2	1.7 x W <sub>B</sub>	1.0	2.0	3.0	1.0

W<sub>B</sub> = Belt width, further information regarding r1 see page III-31

### Available standard materials<sup>3)</sup>

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates <sup>2)</sup>		
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA	EU	MHLW
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR | Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds | Complies with Japanese MHLW Notification 370

● = available | – = not available | empty cells = not tested

<sup>3)</sup> More materials and colors on request





MOVEMENT SYSTEMS

# SERIES 18 | SPROCKETS

siebling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in)

## S18 SPR | Sprockets

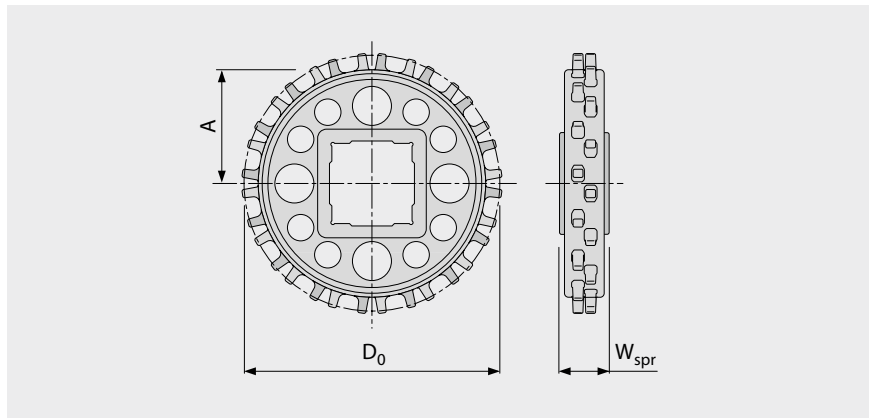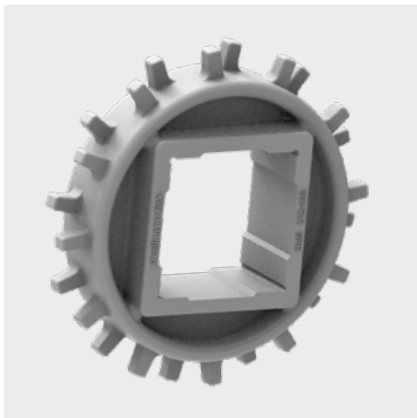

### Main dimensions

Sprocket size (Number of teeth)		Z6	Z9	Z12	Z16	Z20
W <sub>spr</sub>	mm	20.0	25.0	25.0	25.0	25.0
	inch	0.79	0.98	0.98	0.98	0.98
D <sub>0</sub>	mm	50.6	74.1	97.9	129.9	162.0
	inch	1.99	2.92	3.85	5.11	6.38
A <sub>max</sub>	mm	19.2	30.9	42.8	58.8	75.0
	inch	0.76	1.22	1.69	2.31	2.95
A <sub>min</sub>	mm	16.6	29.0	41.3	57.7	74.1
	inch	0.65	1.14	1.63	2.27	2.92

### Shaft bores (● = Round, ■ = Square; \* = not possible with G tab belts)

20	mm	●*				
25	mm		● / ■*	●	●	●
30	mm			●	●	●
40	mm			● / ■	● / ■	● / ■
0.75	inch	●*				
1	inch		● / ■*	●	●	●
1.25	inch			●	●	●
1.5	inch			● / ■	● / ■	● / ■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 18 | SIDE GUARDS

siegling prolink  
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) |  $C_c = 1.7$


## S18 SG | Side guards

Lane divider to separate products at curve belt applications

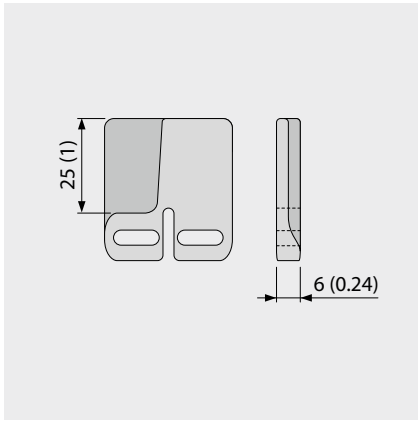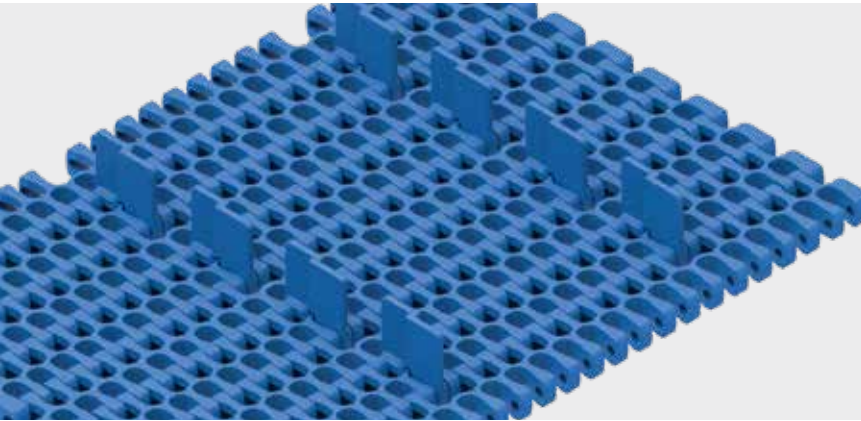

### Basic data

Material	Color	Height (h)
		25 mm 1 inch
PE	BL	●

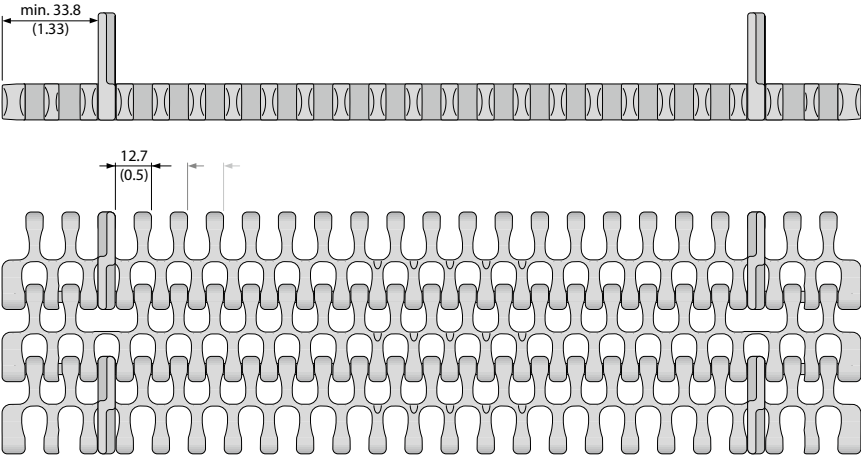

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".  
All imperial dimensions (inches) are rounded off.  
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.




MOVEMENT SYSTEMS




# SERIES 18 | INSTALLATION NOTES

Side flexing and spiral belt | Pitch 25.4 mm (1 in)

## Preferred travel direction



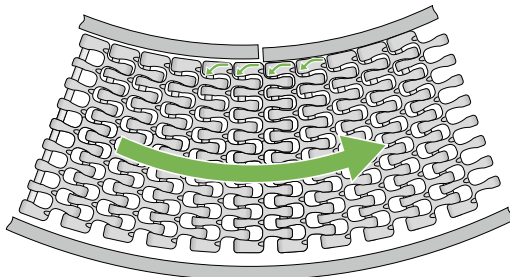


Curve conveyor

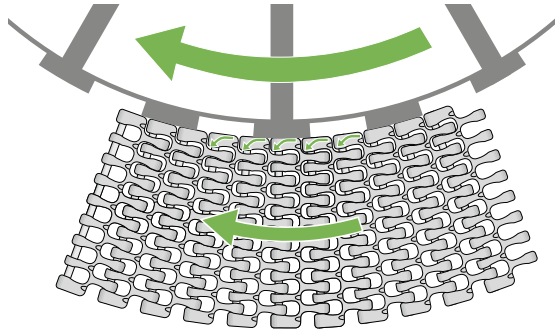




Cage driven spiral

## Curve direction/Pin position clockwise -> Belt CW (clockwise)

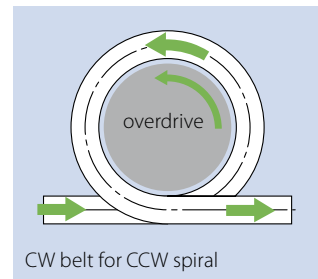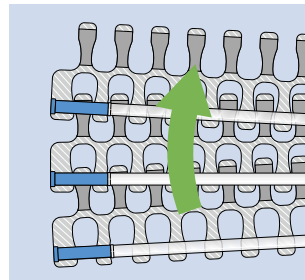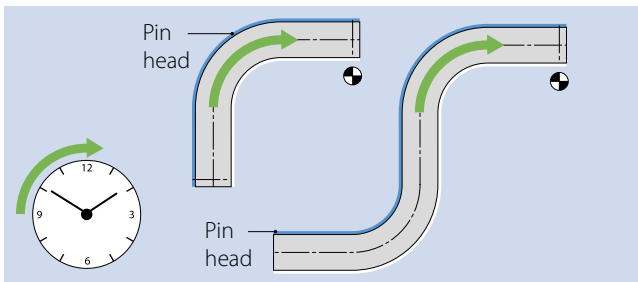


CW belt for CCW spiral

## Curve direction/Pin position Counterclockwise -> Belt CCW (Counterclockwise)

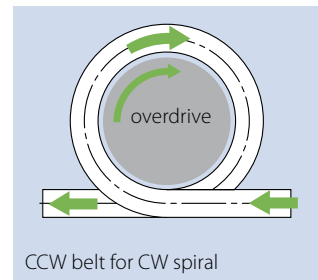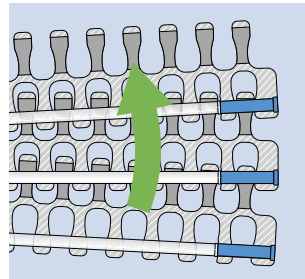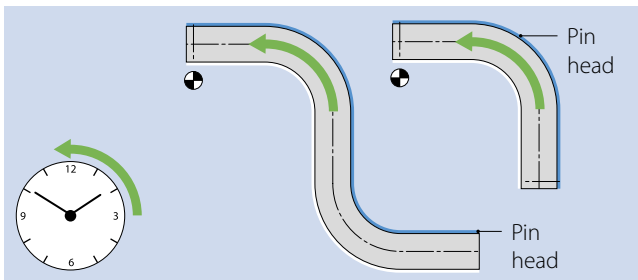


CCW belt for CW spiral

## Surface/Sprocket position

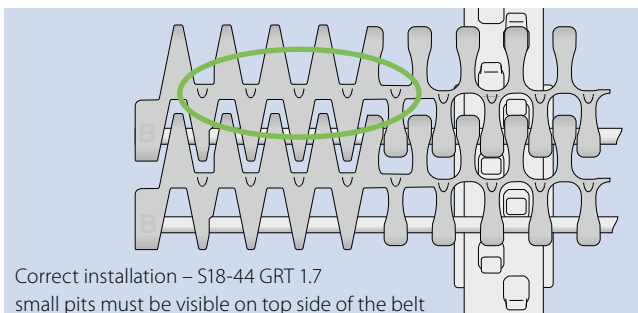

Correct installation – S18-44 GRT 1.7  
small pits must be visible on top side of the belt

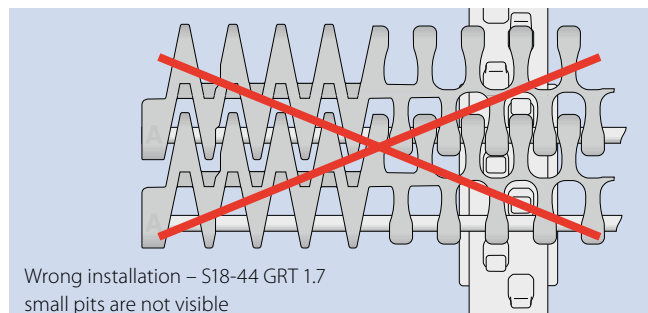



Wrong installation – S18-44 GRT 1.7  
small pits are not visible

Further information in chapter 3 and 5



# 1.3 RETAINER RINGS

## RTR | Retainer Rings

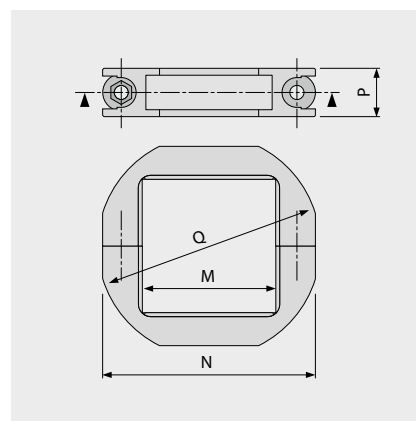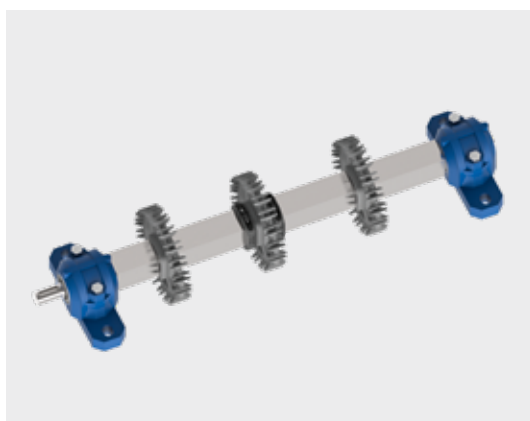

Shaft size	Article number	Designation*	Main dimensions** [mm (in)]			
			M	N	P	Q
SQ 40 mm	98168799	RTR PA LG (SS) SQ40MM	41 (1.6)	65 (2.6)	15 (0.6)	68 (2.7)
SQ 60 mm	98168899	RTR PA LG (SS) SQ60MM	61 (2.4)	86 (3.4)	15 (0.6)	97 (3.8)
SQ 1½ in	98168999	RTR PA LG (SS) SQ1.5IN	39 (1.5)	65 (2.6)	15 (0.6)	67 (2.6)
SQ 2½ in	98169099	RTR PA LG (SS) SQ2.5IN	64 (2.5)	89 (3.5)	15 (0.6)	100 (3.9)

\* SS = stainless steel screw and nut

\*\* To verify that a retainer ring is suitable for a specific sprocket check that  $Q/2 < A$

The „A“ dimension is the distance from shaft centre to underside of belt.

This value can be found under sprocket data in the belt brochures.



# 1.4 APPLICATIONS

## Fruit and vegetable processing

	Washing	Draining	Incline/decline	Sorting	Conveying	Deep freezing	Palletizing/ de-palletizing	Container conveying	Sterilising/cooling
S1-0 FLT	•		•	•	•				
S1-18 FLT		•	•		•	•			
S2-0 FLT				•	•				
S2-57 GRT	•	•				•			•
S2-57 RRB						•	•	•	•
S2-0 FRT1							•	•	
S4.1-0 FRT1			•				•		
S4.1-21 NTP		•	•						
S5-45 GRT	•	•	•		•	•			•
S5-45 GRT G	•	•	•		•	•			•
S5-45 GRT ST	•	•	•		•	•			•
S6.1-0 FLT		•	•			•			
S6.1-21 FLT	•	•	•		•	•			•
S6.1-23 FLT	•	•	•		•	•			•
S6.1-36 FLT	•	•			•	•			•
S8-0 FLT					•		•	•	
S8-25 RAT							•	•	
S8.1-30 FLT					•			•	
S8.1-30 FLT GT					•			•	
S8-0 FRT1			•				•		
S9-57 GRT	•	•	•			•			•
S9-57 GRT G	•	•	•			•			•
S9.1-57 GRT	•	•	•			•			•
S10-0 FLT			•	•	•				
S10-0 NTP		•	•						
S10-0 FRT1			•		•			•	
S10-22 FLT	•	•	•		•				
S10-36 FLT	•	•			•	•			•
S10-36 LRB			•		•				
S11-45 GRT					•				
S11-45 GRT HD					•				
S11 Combo					•				
S13-0 FLT				•	•				
S13-34 FLT		•		•					
S14-0 FLT					•		•	•	
S14-25 FLT	•	•		•	•		•	•	
S14-25 CUT	•			•	•	•			
S14-25 FRT1								•	

	Washing	Draining	Incline/decline	Sorting	Conveying	Deep freezing	Palletizing/ de-palletizing	Container conveying	Sterilising/cooling
S15-47 GRT		●							
S15-47 RSA		●							
S17-0 FLT					●		●	●	
S18-44 GRT 2.2		●			●	●			●
S18-44 GRT 2.2 G		●			●	●			●
S18-44 HDK 2.2		●			●	●			
S18-44 GRT 1.7		●			●	●			
S18-44 FRT1 2.2		●	●		●				

# 1.4 APPLICATIONS

## Meat and poultry processing

	Cutting/jointing	Trimming/filleting	Topping/Breading conveyors	Cooling/freezing	Conveying	Incline/decline	Metal detectors	Packaging
S2-0 FLT					•		•	•
S2-12 FLT							•	
S2-0 FRT1								•
S4.1-0 FLT					•		•	•
S4.1-0 FRT1						•		•
S4.1-21 FLT							•	
S5-45 GRT				•		•		•
S5-45 NTP					•			•
S5-39 FRT1/S5-33 FRT2								•
S5-45 GRT G				•		•		•
S5-45 GRT RG				•		•		•
S5-45 GRT ST				•		•		•
S6.1-0 FLT	•	•			•	•	•	•
S6.1-0 NTP	•	•				•	•	
S6.1-0 CTP					•	•	•	•
S6.1-21 FLT					•	•	•	
S6.1-23 FLT					•	•	•	
S6.1-36 FLT				•				
S8.1-30 FLT								•
S8.1-30 FLT GT								•
S8-0 FRT1						•		•
S9-57 GRT				•		•		
S9-57 GRT G				•		•		
S9.1-57 GRT				•		•		
S10-0 FLT				•	•	•	•	
S10-0 NTP					•			
S10-0 FRT1					•	•		•
S10-22 FLT				•	•	•	•	
S10-36 FLT				•				
S10-36 LRB					•	•		
S11-45 GRT					•			•
S11-45 GRT HD					•			•
S11-33 FRT2								•
S11 Combo					•			
S13-0 CTP		•				•		
S14-0 FLT							•	•
S14-25 CUT				•				
S14-25 FRT1								•

	Cutting/jointing	Trimming/filleting	Topping/Breading conveyors	Cooling/freezing	Conveying	Incline/decline	Metal detectors	Packaging
S15-47 GRT			●	●				
S15-47 RSA			●					
S18-44 GRT 2.2			●	●	●			●
S18-44 GRT 2.2 G			●	●	●			●
S18-44 HDK 2.2			●	●	●			●
S18-44 GRT 1.7			●	●	●			●
S18-44 FRT1 2.2			●	●	●	●		●

# 1.4 APPLICATIONS

## Baked goods manufacturing

	Emptying molds	Spirals	Cooling/freezing tunnels	Conveying	Decorating/glazing	Metal detectors	Conveying sheets/molds	Laminating	Packaging
S1-0 FLT	●						●		●
S1-18 FLT									
S2-0 FLT				●	●		●	●	●
S2-57 GRT			●			●		●	
S2-57 RRB			●			●			
S4.1-0 FLT			●	●	●	●		●	●
S4.1-0 NPY			●	●		●		●	
S4.1-0 FRT1				●					●
S4.1-21 FLT			●	●	●	●		●	●
S5-45 GRT	●		●	●			●		
S5-45 GRT G	●	●	●	●			●		
S5-45 GRT RG	●	●	●	●			●		
S5-45 GRT ST	●	●	●	●			●		
S5-45 GRT BT		●							
S6.1-0 FLT	●			●		●			●
S6.1-21 FLT			●	●					
S6.1-23 FLT			●	●					
S6.1-36 FLT			●						
S8-0 FLT	●						●		●
S8-25 RAT							●		
S8.1-30 FLT	●						●		●
S8.1-30 FLT GT	●						●		●
S8-0 FRT1				●					●
S9-57 GRT		●	●	●			●		
S9-57 GRT G		●	●	●			●		
S9-57 GRT F2, F3, F4–F8		●							
S9.1-57 GRT		●		●			●		
S10-0 FLT			●	●	●	●			
S10-0 NTP				●					
S10-22 FRT1				●			●		●
S10-22 FLT			●			●			
S10-36 FLT			●						
S10-36 LRB				●					
S11-45 GRT				●			●		●
S11-45 GRT HD				●			●		●
S11 Combo		●		●					
S13-0 FLT			●	●	●	●		●	
S13-0 NPY			●	●		●		●	
S13-0 CTP				●	●				
S13-34 FLT			●	●	●				



	Emptying molds	Spirals	Cooling/freezing tunnels	Conveying	Decorating/glazing	Metal detectors	Conveying sheets/molds	Laminating	Packaging
S14-0 FLT						●			●
S14-25 FLT			●	●		●	●		●
S14-25 FRT1	●						●		●
S15-47 GRT			●	●					
S15-47 RSA			●	●					
S17-0 FLT	●						●		●
S18-44 GRT 2.2		●	●	●			●		●
S18-44 GRT 2.2 G		●	●	●			●		●
S18-44 HDK 2.2			●	●			●		●
S18-44 GRT 1.7		●	●	●			●		●
S18-44 FRT1 2.2		●		●					●

# 1.4 APPLICATIONS

## Seafood processing

	Incline/decline	Trimming/Slicing/ Filleting	Draining	Inspection benches	Conveying	Freezing/ decorating	Metal detectors	Packaging
S1-0 FLT	●			●	●			●
S1-18 FLT	●		●		●	●		●
S2-0 FLT				●	●			●
S2-12 FLT					●			
S2-0 FRT1					●			●
S4.1-0 FLT							●	●
S4.1-0 FRT1								●
S4.1-21 FLT							●	
S4.1-21 NTP	●		●			●		
S5-45 GRT	●		●			●		●
S5-45 NTP	●							●
S5-45 GRT G	●		●			●		●
S5-45 GRT RG	●		●			●		●
S5-45 GRT ST	●		●			●		●
S6.1-0 FLT	●			●	●		●	●
S6.1-0 NTP	●						●	
S6.1-0 CTP	●				●		●	●
S6.1-21 FLT	●		●	●	●	●		●
S6.1-23 FLT	●		●	●	●	●		●
S6.1-36 FLT			●			●		
S8.1-30 FLT								●
S8.1-30 FLT GT								●
S8-0 FRT1								●
S9-57 GRT	●		●					
S9-57 GRT G	●		●					
S9.1-57 GRT	●		●					
S10-0 FLT	●			●	●		●	
S10-0 NTP	●		●			●		
S10-0 FRT1					●			●
S10-22 FLT	●		●		●	●	●	
S10-36 FLT			●			●		
S10-36 LRB	●				●			
S11-45 GRT					●			●
S11-45 GRT HD					●			●
S11 Combo					●			
S13-0 CTP	●	●						
S13-34 FLT			●		●			

	Inline/decline	Trimming/Slicing/ Filleting	Draining	Inspection benches	Conveying	Freezing/ decorating	Metal detectors	Packaging
S14-0 FLT							●	●
S14-25 CUT			●			●		
S14-25 FRT1								●
S18-44 GRT 2.2			●		●	●		●
S18-44 GRT 2.2 G			●		●	●		●
S18-44 HDK 2.2			●		●	●		●
S18-44 GRT 1.7			●		●	●		●
S18-44 FRT1 2.2	●		●		●			●

# 1.4 APPLICATIONS

## Automotive/tire manufacturing

	Vehicle conveying	Tire conveying	Skid conveying	Worker belts
S1-0 FLT	●	●		●
S1-0 SRS	●	●	●	●
S1-18 FLT	●	●		●
S1-0 NSK	●			●
S1-0 FRT1				●
S4.1-0 FLT				●
S5-45 GRT		●		
S5-45 NTP		●		
S5-45 GRT G		●		
S5-45 GRT RG		●		
S5-45 GRT ST		●		
S6.1-0 CTP		●		
S7-0 FLT	●		●	
S7-0 SRS	●		●	●
S7-6 FLT	●		●	
S7-0 NSK	●			●
S7-6 NSK	●			●
S7-0 FRT1		●		
S8-0 FLT	●			●
S8-0 SRS		●		●
S8-0 NSK		●		●
S8-25 RAT		●		
S8-0 RTP A90		●		
S9-57 GRT		●		
S9-57 NTP		●		
S9-57 GRT G		●		
S9.1-57 GRT		●		
S17-0 FLT	●			●
S17-0 SRS	●			●

## Logistics

	General logistics	Parcel sorting	Airports
S1-0 FLT			•
S1-0 SRS	•	•	•
S1-0 NSK	•		
S2-0 FLT			•
S4.1-0 FRT1	•	•	•
S5-45 GRT	•	•	
S5-39 FRT1/S5-33 FRT2		•	
S5-45 GRT G	•	•	
S5-45 GRT RG	•	•	
S5-45 GRT ST	•	•	
S5-45 GRT BT	•		
S6.1-0 CTP		•	
S8-0 FLT	•	•	•
S8.1-30 FLT	•		
S8.1-30 FLT GT	•		
S8-0 FRT1	•	•	•
S8-0 RTP A90	•	•	
S9-57 GRT	•	•	
S9-57 GRT G	•	•	
S9.1-57 GRT	•	•	
S11-45 GRT	•	•	
S11-45 GRT HD	•	•	
S11-33 FRT2		•	
S11 Combo	•		
S14-0 FLT	•	•	•
S17-0 FLT	•	•	•
S18-44 GRT 2.2	•	•	
S18-44 GRT 2.2 G	•	•	
S18-44 HDK 2.2	•	•	
S18-44 GRT 1.7	•	•	
S18-44 FRT1 2.2			•

# 1.4 APPLICATIONS

## Other applications

	Textile industry	Glass industry	Deep freezing/ freezing towers	Dairy products	Conveying people	Ski lift/access belts	Unit goods	Palette conveyors	Paper	Cooling tunnels	Corrugated cardboard
S1-0 FLT				•	•	•	•		•		
S1-0 SRS					•			•			
S1-18 FLT				•							
S1-0 NSK					•						
S1-0 FRT1					•	•					
S2-0 FLT	•	•		•					•		
S2-12 FLT				•							
S2-57 GRT				•							
S2-57 RRB		•		•							
S2-0 FRT1				•			•				
S4.1-0 FLT	•	•		•			•		•		•
S4.1-0 FRT1		•					•		•		•
S4.1-21 FLT	•	•		•					•		
S5-45 GRT			•	•							
S5-39 FRT1/S5-33 FRT2				•							
S5-45 GRT G			•	•							
S5-45 GRT RG			•	•							
S5-45 GRT ST			•	•							
S5-45 GRT BT								•			
S6.1-0 FLT		•		•			•				
S6.1-0 NTP				•							
S6.1-0 CTP				•							
S6.1-21 FLT				•							
S6.1-23 FLT				•							
S6.1-36 FLT				•							
S7-0 FLT					•		•	•			
S7-0 SRS					•		•	•			
S7-6 FLT								•			
S7-0 NSK					•						
S7-0 FRT1							•	•			
S8-0 FLT	•	•			•		•	•	•		•
S8-0 NSK					•				•		
S8-0 FRT1	•	•					•		•		•
S8-0 RTP A90							•				
S9-57 GRT			•	•							
S9-57 GRT G			•	•							
S9-57 GRT F2, F3, F4 – F8			•								
S9.1-57 GRT			•	•							

	Textile industry	Glass industry	Deep freezing/ freezing towers	Dairy products	Conveying people	Ski lift/access belts	Unit goods	Palette conveyors	Paper	Cooling tunnels	Corrugated cardboard
S10-0 FLT				●							
S10-0 NTP				●							
S10-0 FRT1				●							
S10-22 FLT				●							
S10-36 FLT				●							
S11-45 GRT	●			●			●		●		
S11-45 GRT HD	●			●			●		●		
S11-33 FRT2				●							
S11 Combo			●					●			
S14-0 FLT	●	●					●				
S14-0 CUT			●							●	
S15-47 GRT										●	
S15-47 RSA										●	
S17-0 FLT	●	●			●		●	●	●		●
S18-44 GRT 2.2				●			●		●		
S18-44 GRT 2.2 G				●			●		●		
S18-44 HDK 2.2				●			●		●		
S18-44 GRT 1.7				●			●		●		





# 2 MATERIALS

2.1 Plastic materials (Properties)

2.2 Other materials

## 2.1 PLASTIC MATERIALS (PROPERTIES)

### **PA (Polyamide)**

- good wear resistance in dry applications
- good fatigue resistance
- temperature range –40 to +120 °C (–40 to 248 °F)
- short-term temperature resistance up to 135 °C (275 °F)
- FDA/EU approved for direct food contact
- flame retardant according to UL94-V2

### **PA-HT (PA high temperature resistant)**

- material reinforced with fiberglass
- absorbs little water in humid environments
- very stiff and durable
- temperature range –30 to +155 °C (–22 to 311 °F)
- very high short-term temperature resistance up to 180 °C (356 °F)
- FDA/EU approved for direct food contact (only color BL)

### **PBT (Polybutylene terephthalate)**

- good wear resistance
- very good abrasive resistance
- good strength and stiffness
- temperature range –40 to +120 °C (–40 to 248 °F)
- not recommended for use in hot water > 50 °C (122 °F)
- FDA/EU approved for direct food contact

### **PE (Polyethylene)**

- very good chemical resistance to acids and alkalis
- very good release properties due to low surface tension
- good friction and abrasion behavior
- highly impact resistant
- low specific weight
- limited strength
- temperature range –70 to +65 °C (–94 °F to 149 °F)
- FDA/EU approved for direct food contact
- good UV-A/UV-B/UV-C resistance\*

### **PE-I (PE impact resistant)**

- modified PE
- impact resistant
- FDA/EU approved for direct food contact

### **PE-MD (PE metal detectable)**

- modified PE
- material easily detected in metal detectors
- FDA/EU approved for direct food contact

### **PLX (Wear and impact improved polymer)**

- good wear resistance
- very good abrasive resistance
- good fatigue resistance
- suitable for dry, wet and submerged usage (less hygroscopic)
- highly impact resistant
- very good chemical resistance to acids and alkalis
- temperature range –45 to +120 °C (–49 to 248 °F)
- short-term temperature resistance up to 150 °C (302 °F)
- FDA/EU approved for direct food contact

### **POM (Polyoxymethylene/Polyacetal)**

- very dimensionally stable
- very strong and stiff
- high chemical resistance to organic solvents
- lower coefficient of friction
- very durable material
- hard, incision-resistant surface
- temperature range –45 to +90 °C (–49 to 194 °F)
- FDA/EU approved for direct food contact
- good UV-A/UV-B/UV-C resistance\*

### **POM-CR (POM cut resistant)**

- modified POM
- impact resistant, highly resistant to incisions
- minimal ridge formation
- low risk of material delamination
- FDA/EU approved for direct food contact
- good UV-A/UV-B/UV-C resistance\*

**HW (POM highly wear resistant)**

- modified POM
- highly wear resistant

**POM-HC (POM highly conductive)**

- modified POM
- highly conductive material
- surface resistivity  $< 10^6 \Omega$  (according to ISO 21178)
- very good friction and abrasion properties

**POM-MD (POM metal detectable)**

- modified POM
- material easily detected in metal detectors
- FDA/EU approved for direct food contact

**PP (Polypropylene)**

- standard material for normal conveying applications
- quite strong and stiff
- highly resistant to acids, alkalis, salts, alcohols
- low specific weight
- no risk of stress cracks forming
- temperature range  $+5$  to  $+100^\circ\text{C}$  ( $41$  to  $212^\circ\text{F}$ )
- FDA/EU approved for direct food contact
- good UV-A/UV-B/UV-C resistance\*

**PP-MD (PP metal detectable)**

- modified PP
- material easily detected in metal detectors
- FDA/EU approved for direct food contact

**PP-SW (steam and hot water resistant)**

- modified PP
- improved resistance against oxidation and embrittlement
- FDA/EU approved for direct food contact

**PXX-HC (PXX self-extinguishing, highly conductive)**

- flame retardant in line with DIN EN 13501-1 C<sub>fl</sub>-s1 and DIN 4102 (B1)
- surface resistivity  $< 10^6 \Omega$  according to ISO 21178)
- especially for use in automotive industries
- temperature range  $+5$  to  $+100^\circ\text{C}$  ( $41$  to  $212^\circ\text{F}$ )
- flame retardant according to UL94-V1

**TPC1 (Thermoplastic Copolyester)**

- material for sprockets and belts exposed to high impacts
- abrasion resistant
- wear resistant
- extremely impact resistant
- light or medium load
- low brittleness, highly ductile
- hardness 60 shore D
- temperature range  $-25$  to  $+80^\circ\text{C}$  ( $-13$  to  $176^\circ\text{F}$ )
- FDA/EU approved for direct food contact

\* **UV resistant materials:** The Prolink materials listed as UV resistant are formulated to prevent mechanical degradation of the polymer. Tests simulating 5 years UV-C exposure (300 working days/year, one shift) show no reduction of tensile strength of the Prolink materials listed as UV resistant. The color of polymers exposed to UV radiation (sunlight, UV-C lamps etc.) will fade over time.

# 2.1 PLASTIC MATERIALS (PROPERTIES)

## Belt material orientation chart

Every material has a unique combination of strengths. The following table provides an overview of all Siegling Prolink materials and their properties rated from 1 (bad) to 10 (good).

	Belt pull capacity	Impact strength	Wear resistance (high value = low dusting)	High temperature	Low temperature	Price	Direct food contact	Submerged in water	Metal detectable	Antistatic	Flame retardant	Suitable for microwave applications
PE	2	8	2	3	9	9	Yes	Yes	No	No	No	Yes
PE-I	2	9	2	3	9	9	Yes	Yes	No	No	No	No
PP	4	3	3	7	3	9	Yes	Yes	No	No	No	Yes
POM	8	4	7	6	7	7	Yes	Yes	No	No	No	No
POM-CR	8	6	7	6	7	7	Yes	Yes	No	No	No	No
PA	8	4	8	8	6	7	Yes	No	No	No	Yes	No
PA-HT	7	6	9	9	5	6	Yes**	No	No	No	No	No
PE-MD	2	7	2	3	9	6	Yes	Yes	Yes	No	No	No
PP-MD	4	2	3	7	3	8	Yes	Yes	Yes	No	No	No
PP-SW	3	4	3	8	3	8	Yes	Yes	No	No	No	No
POM-MD	7	3	7	6	7	2	Yes	Yes	Yes	No	No	No
POM-HC	7	3	7	6	7	4	No	Yes	No	Yes	No	No
PXX-HC	4	3	3	7	3	4	No	Yes	No	Yes	Yes	No
TPC1	2	10	10*	5	5	2	Yes	Yes	No	No	No	No
PLX	5	9	9	8	7	3	Yes	Yes	No	No	No	No

\* for applications in abrasive particles, \*\* only in BL (blue)


## Use of materials

Application environment		Belt modules	Pins
General conveying	General conveyor (> 10 °C / > 50 °F)	PP	PP
	Aggressive chemicals (strong acid etc.)	PP	PP
	Impact and/or low temperature (<10 °C / <50 °F)	PE (PE-I)	PE
	High load	POM	PBT
Abrasive	Deboning and trimming	POM-CR	PBT
	Dip tank conveyor (PAA)	PLX	PLX
	Wet, light load (Temperature <50 °C (122 °F))	PP	PBT
	Wet, high load (Temperature <50 °C (122 °F))	POM	PBT
	Dry	POM	PBT
Increased temperature	Boiling and steaming, up to 100 °C (212 °F)	PP-SW	PP-SW
	Dry, high load up to 90 °C (194 °F)	POM	PBT
	Wet, high load up to 90 °C (194 °F)	POM	POM
	Dry up to 120 °C (248 °F), FDA/EU	PA	PBT
	Dry up to 155 °C (311 °F), not FDA/EU	PA-HT	PA-HT



# 2.1 PLASTIC MATERIALS (PROPERTIES)

## Temperature ranges

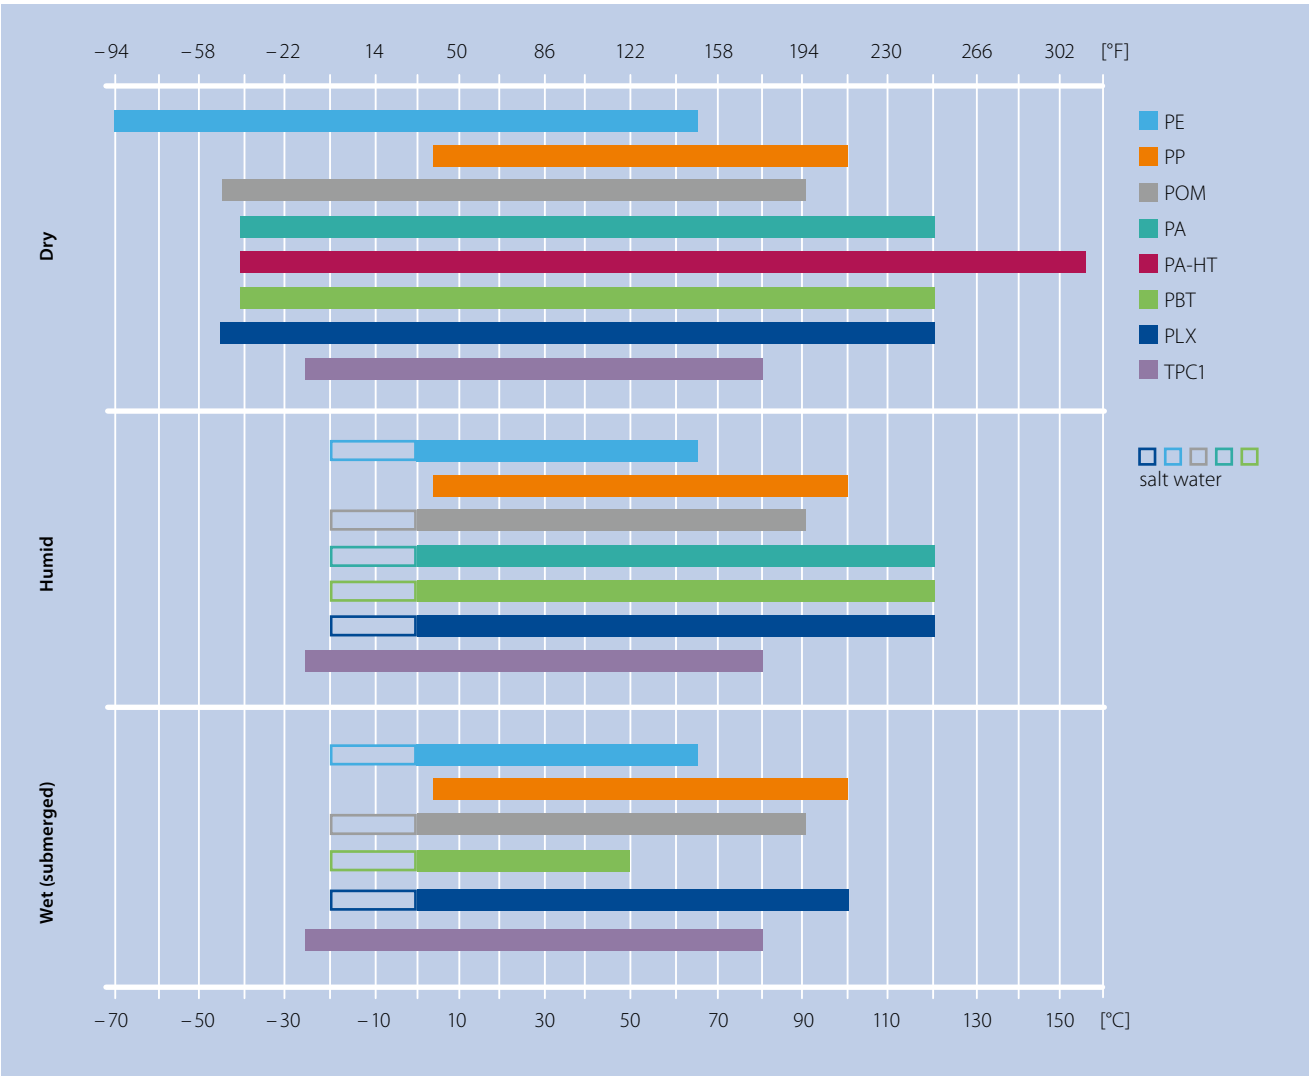


For the effect of temperature on belt measurement see chapter 3.




The following charts show the  $c_T$  factor for standard materials. This shows how the belt strength is affected by temperature.


**PE (PE-I, PE-MD)**

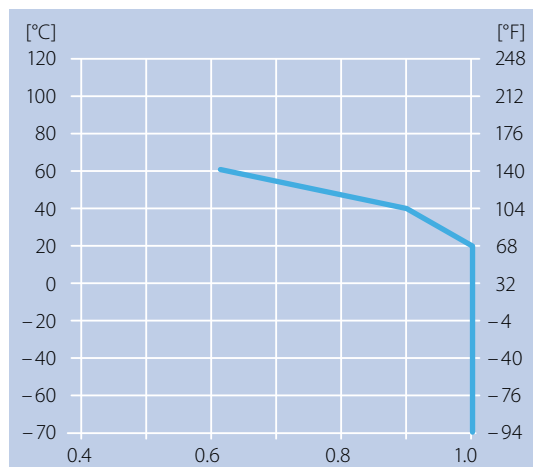


**PP (PP-MD, PP-SW)**

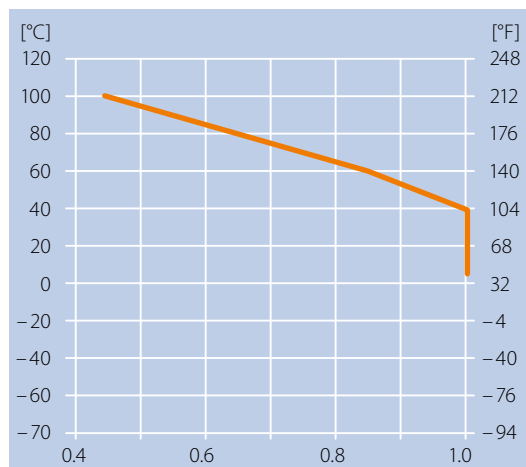


**POM (POM-CR, POM-MD, POM-HC, POM-HW)**

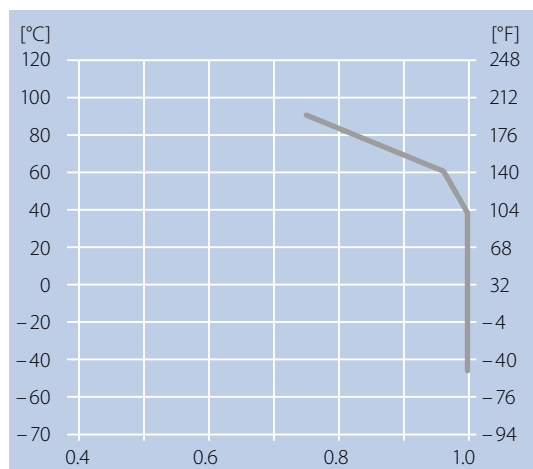


**PA and PLX**

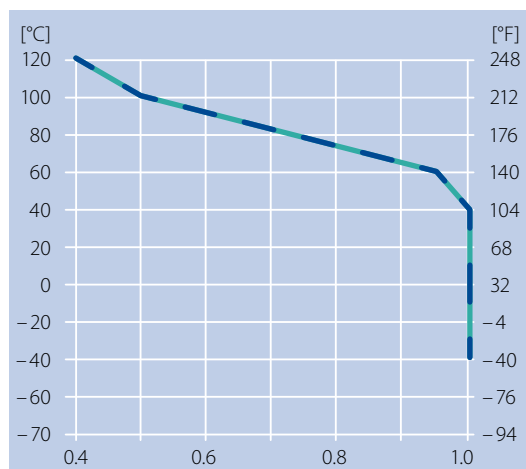

**PA-HT**

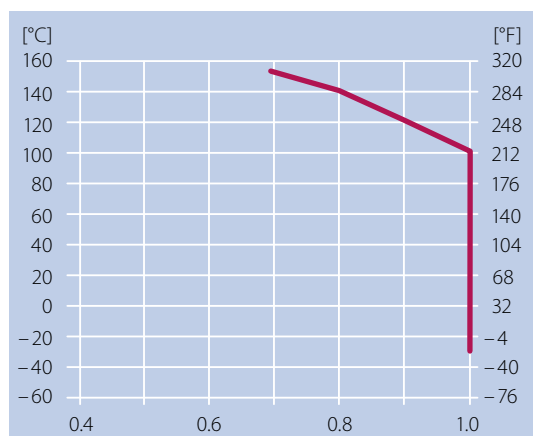

**TPC1**

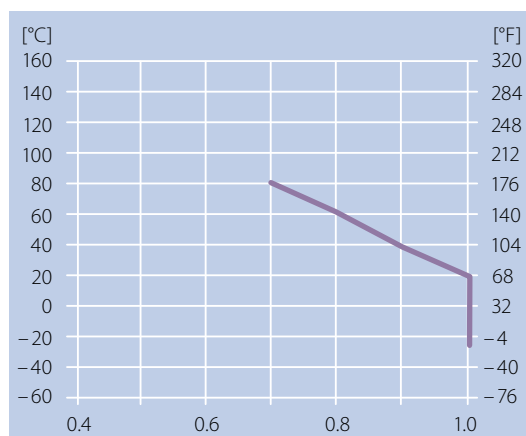

## 2.1 PLASTIC MATERIALS (PROPERTIES)

### Color codes

Siegling Prolink materials come in a variety of colors. The table shows all available colors with the approx. RAL code. Please note that Siegling Prolink modules are not produced in every color listed. For standard material/color combinations see the Siegling Prolink series datasheet.

Color sample	Code	Name	Approx. RAL
	AT	anthracite	7021
	BL	blue	5015
	BG	beige	1015
	BK	black	9011
	DB	dark blue	5010
	GN	green	6035
	LB	light blue	5012
	LG	light gray	7001
	OR	orange	2004
	RE	red	3020
	TQ	turquoise	5018
	UC	uncolored	–
	WT	white	9010
	YL	yellow	1026

## Friction factors

The dynamic coefficients of friction  $\mu_s$  between belt and wearstrip are shown below.

The figures stated have been established under ideal conditions. When operating under other conditions we recommend assuming higher friction coefficients. ("—" = combination not recommended, empty cell = combination not tested)

Wearstrip material	Operating conditions	Belt material																				
		PE & PE-MD			PP, PP-MD & PXX-HC			POM incl. CR, HC & MD			PA-HT			PA			TPC1			PLX		
		clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled
Hardwood	dry	0.16	0.16	0.24	0.22	0.39	0.59	0.16	0.22	0.32	0.18	0.19	0.29	0.14	0.14	0.14						
	wet	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–						
PE-HMW	dry	–	–	–	0.14	0.19	0.29	0.08	0.19	0.29	0.15	0.23	0.34	0.12	0.2	0.31						
	wet	–	–	–	0.12	0.17	0.26	0.08	0.12	0.25	–	–	–	–	–	–						
Lubricated PA	dry	0.18	0.28	0.45	0.13	0.24	0.35	0.12	0.20	0.30	0.16	0.24	0.36	0.14	0.22	0.32						
	wet	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–						
Steel	dry	0.14	0.23	0.38	0.25	0.31	0.47	0.18	0.23	0.35	0.20	0.31	0.45	0.19	0.25	0.38	0.40	0.46	0.61	0.24	0.28	0.32
	wet	0.13	0.21	0.33	0.24	0.29	0.44	0.14	0.17	0.26	–	–	–	–	–	–	0.38	0.44	0.59	0.21	0.26	0.30
UHMW PE	dry	0.30	0.31	0.47	0.13	0.22	0.35	0.13	0.17	0.32	0.18	0.24	0.38	0.15	0.19	0.35	0.43	0.49	0.65	0.21	0.25	0.29
	wet	0.27	0.28	0.45	0.11	0.20	0.32	0.11	0.15	0.28	–	–	–	–	–	–	0.39	0.46	0.62	0.10	0.18	0.23

Dynamic coefficients of friction  $\mu_{acc}$  between belt and conveyed product.

("—" = combination not recommended, empty cell = combination not tested)

Wearstrip material	Operating conditions	Belt material																	
		PE & PE-MD			PP, PP-MD & PXX-HC			POM incl. CR, HC & MD			PA-HT			PA			TPC1		
		clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled	clean	regular	soiled
Cardboard	dry	0.15	0.19	0.34	0.22	0.31	0.55	0.20	0.30	0.50	0.20	0.30	0.50	0.14	0.30	0.5			
	wet	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Glass	dry	0.10	0.15	0.25	0.16	0.24	0.41	0.13	0.20	0.35	0.13	0.20	0.33	0.13	0.20	0.33			
	wet	0.09	0.13	0.22	0.17	0.21	0.37	0.13	0.18	0.33	—	—	—	—	—	—			
Metal	dry	0.13	0.2	0.33	0.32	0.48	0.6	0.17	0.27	0.45	0.20	0.30	0.50	0.18	0.28	0.46	0.42	0.48	0.63
	wet	0.11	0.17	0.28	0.29	0.45	0.58	0.16	0.25	0.42	—	—	—	—	—	—	0.40	0.46	0.61
Plastic	dry	0.10	0.13	0.25	0.15	0.21	0.37	0.15	0.25	0.41	0.13	0.20	0.33	0.13	0.20	0.31	0.45	0.51	0.67
	wet	0.08	0.11	0.22	0.14	0.19	0.34	0.14	0.21	0.36	—	—	—	—	—	—	0.41	0.47	0.63

## 2.1 PLASTIC MATERIALS (PROPERTIES)

### Declaration of compliance

#### FDA/EU

Siegling Prolink modular belts made of the following materials are proven to comply with FDA 21 CFR as well as the (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds:

	WT	LG	BK	LB	BL	DB	UC	BG	OR
PA		●			●				
PA-HT					●				
PBT				●	●		●		
PE	●	●	●	●	●	●	●		●
PE-I							●		
PE-MD					●				
PLX					●		●		
POM	●	●		●	●	●	●		●
POM-CR	●	●		●	●	●	●		●
POM-MD					●				
PP	●	●		●	●	●	●		●
PP-MD					●				
PP-SW	●			●	●				
TPC1	●			●			●		
TPE R7			●		●			●	
TPE R8								●	

#### MHLW

Siegling Prolink modular belts made of the following materials comply with Japanese Food Regulation (Ministry of Health and Welfare #370).

	WT	LG	BK	LB	BL	DB	UC	BG	OR
PA		●			●				
PA-HT					●				
PBT				●	●		●		
PE	●	●	●	●	●	●	●		
PE-I							●		
PE-MD					●				
PLX					●		●		
POM	●	●		●	●	●	●		
POM-CR	●	●		●	●	●	●		
POM-MD					●				
PP	●	●		●	●	●	●		
PP-MD					●				
PP-SW	●			●	●				
TPC1	●	●		●			●		

#### Halal

All Siegling POM Prolink modular belts are certified as being compliant with Halal regulations by IFRC Asia (member of the World Halal Council).

## Siegling Prolink material identification test

The following tests are useful in identifying the type of plastic used for a plastic modular belt.

The easiest and safest way to identify a material is to perform a “water test”. Place a module in water and check whether the module sinks or floats.

Furthermore, you can perform a “burning test”. Ignite a small piece of the plastic you want to identify and carefully observe the behavior of the flame. Check the flame color, the smoke development and the dripping characteristics of the melting plastic. Blow out the flame and check the odor.

Check the results of the tests with the table:

Plastic	Water test	Burning	Odor after extinguishing the flame
PP	Floats	Blue flame Yellow top Swells and drips	Sweet and like burning oil
PE	Floats	Blue flame Yellow top Drippings may burn	Paraffin (like a blown out candle)
POM	Sinks	Invisible (light blue) flame No smoke Drippings may burn	Formaldehyde!
PBT	Sinks	Yellow flame Smoke Drips	Sweet Characteristically*
PA	Sinks	Blue flame Yellow top Melts and drips	Burnt wool, horn or hair
PLX	Sinks	Blue flame Yellow top Drippings may burn	Unique smell

\* Odors are difficult to describe, but are recognizable – use controls (known samples)

Always test only a single small module. Never ignite a whole belt! When performing a burning test, always have a bucket of water to hand. Immerse the module in water after the test to extinguish the flame (POM burns with an almost invisible flame).



## FIRE WARNING for Siegling Prolink plastic modular belts

Siegling Prolink belts are made of various high-quality plastic materials that can burn. If ignited, products made from POM material will emit toxic fumes. During operation, storage and installation NEVER expose Siegling Prolink belts to an ignition source, such as flames, sparks, burning or very hot objects, or excessive heat. Special care should be taken when undertaking repair work, particularly when welding on or near a conveyor if the conveyor is equipped with a Siegling Prolink plastic modular belt.

Hazards from burning Siegling Prolink belts vary depending on material composition and environmental conditions such as temperature and oxygen availability. Hazards may include dense smoke, toxic gases or fumes, a flame that is difficult to detect, and fire spreading due to movement of the burning belt and/or dripping, burning, molten plastic.

Suitable fire extinguishing media include: water spray, foam, and dry chemical.



## 2.1 PLASTIC MATERIALS (PROPERTIES)

### Cleaning agent compatibility

To check the chemical compatibility of a given cleaning solution, contact your supplier. It is important to mention the belt material(s) that will be in contact with the cleaning solution.

Please note the cleaning instructions in section 5.6.

### Chemical resistance

Chemical resistance information is based on details provided by our raw material producers and suppliers.

We recommend that each customer check the resistances to account for the actual on-site conditions and the media that affects the belt. The properties of our rubber topped modules can be different from those in the body of the module.

If requested, we can supply appropriate samples.

The chemical compatibility charts below uses standard terms and generally known names.

#### Substance categories

	Polypropylene (PP)	Polyethylene (PE)	Polyacetal (POM)	Polyamide (PA)	Polybutylene terephthalate (PBT)	PLX
Acids weak	●	●	○	–	○	●
Acids strong	●	○	–	–	–	–
Aldehydes	●	○	○	○		●
Aliphatic HCs	●	●	●	●	●	●
Alcohols	●	●	●	●	●	●
Amines	●	●	○	●	–	–
Aromatic HCs	○	○	○	●	○	●
Chlorinated HCs	–	○	●	○	○	●
Ether	–	○	●	●	●	●
Ester	○	●	–	●	○	●
Fuels	○	○	●	●	●	○
Greases, oils	●	●	●	●	●	●
Hydrofluoric acid	○	○	–	–	●	–
Halogens dry	○	–	–	–		
Inorganic salt solutions	●	●	●	●	●	○
Ketones	○	●	○	●	–	●
Lyes weak	●	●	●	●	●	●
Lyes strong	●	●	●	○	●	○
Organic acids	○	●	●	○	○	○
Oxidizing acids	–	–	–	–	○	○
Petroleum	●	●	●	●	●	○
Turpentine	–	–	●	○	○	
Unsaturated chlorinated HCs	–	–	●	○	○	○
Water cold	●	●	●	●	●	●
Water hot	●	●	●	○	–	●

● = Good resistance | ○ = Limited resistance | – = No resistance | Empty cells = No test data available

## Individual substances/chemicals

	Polypropylene (PP)		Polyethylene (PE)		Polyacetal (POM)		Polyamide (PA)	
	20 °C 70 °F	60 °C 140 °F	20 °C 70 °F	60 °C 140 °F	20 °C 70 °F	60 °C 140 °F	20 °C 70 °F	60 °C 140 °F
Acetic Acid > 5 %	●	●	●	○	○	–	–	–
Acetic Acid (5 %)	●	●	●	●	●		○	–
Acetone	●	●	●	●	○	○	●	●
Alcohol (all types)	●	●	●	●	●	○	●	●
Aluminum Comp.	●	●	●	●			●	●
Ammonia	●	●	●	●	●	●	●	●
Ammonium Comp.	●	●	●	●			●	●
Aniline	●	●	●	–		○		
Aqua Regia	–	–	○	–			–	–
Arsenic Acid	●	●	●	●				
Barium Comp.	●	●	●	●			●	●
Base (10 %)	●	●	●	●	●	●		
Beer	●	●	●	●	●			
Benzene	○	–	○	–	○	○	●	●
Benzenesulfonic Acid (10 %)	●	●	●	●				
Benzoic Acid	●	●	●	●			○	○
Beverages (soft drinks)	●	●	●	●	●	●	●	●
Borax	●	●	●	●				
Boric Acid	●	●	●	●			●	●
Butyl Acrylate	–	–	●	○				
Butyric Acid	●		●	○			●	●
Carbon Dioxide	●	●	●	●			●	●
Carbon Disulfide	○	–	○	–			●	●
Carbon Tetrachloride	○	–	○	–	●	○	●	●
Chloracetic Acid	●	●					–	–
Chlorine (Gas)	–	–	○	–	–	–	–	–
Chlorine (Liquid)	–	–	–	–	–	–	–	–
Chlorine Water (0.4 % Cl)	○	○	○	○	–	–	–	–
Chlorobenzene	–	–	○	–	○	○	●	●
Chloroform	–	–	–	–	–	–	○	
Chromic Acid (50 %)	●	●	●	○	–	–	○	
Chromic Acid (3 %)	●	●	●	●	○	○		
Citric Acid (40 %)	●	●	●	●	●		●	●
Citric Acid (10 %)	●	●	●	●	●	●	●	
Citrus Juices	●	●	●	●			○	
Coconut Oil	●	●	●	●	●	●	●	
Copper Comp.	●	●	●	●	●	●	●	
Corn Oil	●	●	●	○			–	–
Cottonseed Oil	●	○	–	–			●	
Cresol	●	○	○	–			●	
Cyclohexane	●	○	–	–			●	
Cyclohexanol	●	●	●	●	●	●	●	
Cyclohexanone	●	●	●	●				

● = Good resistance | ○ = Limited resistance | – = No resistance | Empty cells = No test data available

## 2.1 PLASTIC MATERIALS (PROPERTIES)

	Polypropylene (PP)		Polyethylene (PE)		Polyacetal (POM)		Polyamide (PA)	
	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Detergents	●	○					●	●
Dextrin	–	–	–	–	○	○	●	●
Dibutyl Phthalate	●	●		–				
Diethyl Ether	●	●	●	●				
Diethylamine	●	●						
Diglycolic Acid (30 %)	●	●						
Diisooctyl Phthalate	●						●	●
Dimethyl Phthalate	●	○					●	●
Dimethylamine	●	●	○	○	○	–	●	●
Dioctyl Phthalate	○	○						
Ethyl Acetate	●	●						
Ethyl Ether	●	●	●	●	●	○	●	○
Ethylamine	●	●	●	●	○	–		
Ethylene Glycol (50 %)	●	●	●	○	●	●		
FerricFerrous Comp.	●	○	●	●			○	–
Formaldehyde (37 %)			●	●	○	○		
Formic Acid (85 %)	●	○	●	–	○	○	●	●
Freon	●	●	●	●	●		●	
Fuel (Oil)	○	○	○	–			●	
Fruit Juices	○	–	●	–	●	●	●	●
Furfural	●	●	●	●	●	●		
Gasoline	●	●					●	●
Glucose	–	–	○	–	●	●	●	●
Glycerol	●	○	–	–	●		●	●
Heptane	●	●	●	●			–	–
Hexane	●	●	●	●	●		●	●
Hydrobromic Acid (50 %)	●	●	●	●	●	●	●	
Hydrochloric Acid (35 %)	●	●	●	●	–	–	–	–
Hydrochloric Acid (10 %)	●	●	●	●	–	–	–	–
Hydrofluoric Acid (35 %)	●	●	●	●	–	–	–	–
Hydrogen Peroxide (3 %)	●	●	●	●	●	●	○	○
Hydrogen Peroxide (90 %)	○	○	●	○	○	–	–	–
Hydrogen Sulfide	●	●	●	●			●	●
Igepal (50 %)	●	●			●	○		
Iodine (Crystals)	●	●	○	○	–	–	–	–
Isooctane	–	–	●				●	●
Isopropyl Alcohol	●	●	●	●	●	●	●	●
Jet Fuel	○	–	○	○	●	●	●	●
Kerosene	○	–	○	○	●	●		
Lactic Acid	●	●	●	●			○	–
Lanolin	●	○	●	●				
Lauric Acid	●	●	●	●				
Lead Acetate	●	●	●	●			●	●
Linseed Oil	●	●	●	●	●	●	●	●
Lubricating Oil	●	○			●	●	●	○

● = Good resistance | ○ = Limited resistance | – = No resistance | Empty cells = No test data available



	Polypropylene (PP)		Polyethylene (PE)		Polyacetal (POM)		Polyamide (PA)	
	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Magnesium Comp.	●	●	●	●			●	
Malic Acid (50%)	●	●	●	●			●	●
Manganese Sulfate	●		●	●			○	○
Margarine	●	●	●	●				
Mercury	●	●	●	●			●	
Methyl Chloride	○	○					●	●
Methyl Ethyl Ketone	●	○	–	–	○	○	●	
Methyl Isobut. Ketone	●	○						
Methylsulfuric Acid	●	●	●	●				
Methylene Chloride	○	–	–	–			○	○
Milk	●	●	●	●	●	●	●	●
Mineral Oil	○	–	●	○	●	●	●	
Mineral Spirit (White Spirit)	○	–						
Molasses	●	●	●	●			●	●
Motor Oil	●	○			●	●	●	●
Naphtha	●	○	○	–			●	●
Nitric Acid (30%)	●	○	●	●	–	–	–	–
Nitric Acid (50%)	○	–	●	○	–	–	–	–
Nitrobenzene	●	○	–	–			○	
Nitrous Acid	●							
Nitrous Oxide	●							
Oleic Acid	●	–			●	●	●	●
Olive Oil	●	●	●	●				
Oxalic Acid	●	●	●	●				
Ozone	○	○	○	–	–	–	○	○
Palmitic Acid (70%)	●	●	●	●			●	
Paraffin	●	●	●	●	●	●	●	●
Peanut Oil	●	●					●	
Perchloric Acid (20%)	●	●	●	●				
Perchloroethylene	–	–	–	–			○	–
Phthalic Acid (50%)	●	●	●	●				
Phenol	●	●	●	●	–	–	–	–
Phenol (5%)	●	●	●	●	–	–	–	–
Phosphoric Acid (30%)	●	●	●	●	○	–	–	–
Phosphoric Acid (85%)	●	●	●	●	–	–	–	–
Photographic Solutions	●	●	●	●			●	
Plating Solutions	●	●	●	●				
Potassium Comp.	●	●	●	●	●	●	○	
Potassium Hydroxide	●	●	●	●	●	●	○	
Potassium Iodide (3% Iodine)	●	●	●	●				
Potassium Permanganate	●	○	●	●			–	–

● = Good resistance | ○ = Limited resistance | – = No resistance | Empty cells = No test data available

## 2.1 PLASTIC MATERIALS (PROPERTIES)

	Polypropylene (PP)		Polyethylene (PE)		Polyacetal (POM)		Polyamide (PA)	
	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Silver Cyanide	●	●						
Silver Nitrate	●	●	●	●				
Sodium Comp.	●	●	●	●				
Sodium Chloride	●	○	●	●			–	–
Sodium Hydroxide	●	●	●	●	●	●	–	–
Sodium Hydroxide (60%)	●	●	●	●	●	●	–	–
Sodium Hypochlorite (5% Cl)	●	○	●	○	–	–	○	
Stearic Acid	●	○	●	●	○		●	●
Sulfamic Acid (20%)	●	●			–	–		
Sulfate Liquors	●	●						
Sulfur	●	●	●	●			●	●
Sulfur Chloride	●							
Sulfur Dioxide	●	●	●	●	–	–	○	○
Sulfuric Acid (10%)	●	●	●	●	●	–	–	–
Sulfuric Acid (50%)	●	●	●	●	–	–	–	–
Sulfuric Acid (70%)	●	○	●	○	–	–	–	–
Sulfurous Acid	●		●	●			○	○
Tannic Acid (10%)	●	●	●	●				
Tartaric Acid	●	●	●	●			●	○
Tetrahydrofuran	○	–			○	○	●	
Toluene	–	–	–	–	○	–	●	●
Transformer Oil	●	○	●	○			●	●
Tributyl Phosphate	●	○						
Trichloroacetic Acid	●	●	○				–	–
Trichloroethylene	–	–	–	–	○	○	○	–
Tricresyl Phosphate	●	○						
Trisodium Phosphate	●	●	●	●				
Turpentine	○	–	●	–	●		●	●
Urea	●	●	●	●			●	●
Vinegar	●	●	●	●	●	●	●	●
Wine	●	●	●	●	●	●	●	●
Xylene	–	–	–	–	●	●	●	●

● = Good resistance | ○ = Limited resistance | – = No resistance | Empty cells = No test data available

## 2.2 OTHER MATERIALS

### High-grip materials


Following materials are used for our friction top modules

Material		Color	Hardness	Temp. range		Approved for food contact*		Bonding
Code	Type			°C	°F	FDA	EU 1935	
R2	EPDM	BK	80 Shore A	−70/100	−94/212	No	No	Mechanical
R3	TPE	BL, TQ	70 Shore A	−45/65	−49/149	Yes	Yes	Mechanically on POM
R4	TPE	BG	86 Shore A	+5/100	+41/212	Yes	Yes	Chemically on PP
R5	TPE	UC	52 Shore A	+5/100	+41/212	Yes	Yes	Chemically on PP
R6	TPE	BK, BL	63 Shore A	−45/60	−49/194	No	No	Chemically on POM**
R7	TPE	BK, BG, BL	50 Shore A	+5/100	+41/212	Yes	Yes	Chemically on PP
R8	TPE	BG	55 Shore A	−70/65	−94/149	Yes	Yes	Chemically on PE

\* Raw material comply with FDA 21 CFR as well as the EU 10/2011 and EC 1935/2004 regulations. Do not use in direct contact with fatty foods

\*\* Bonding to POM base module is not as strong as to PP

### Shore hardness scale for High-grip materials

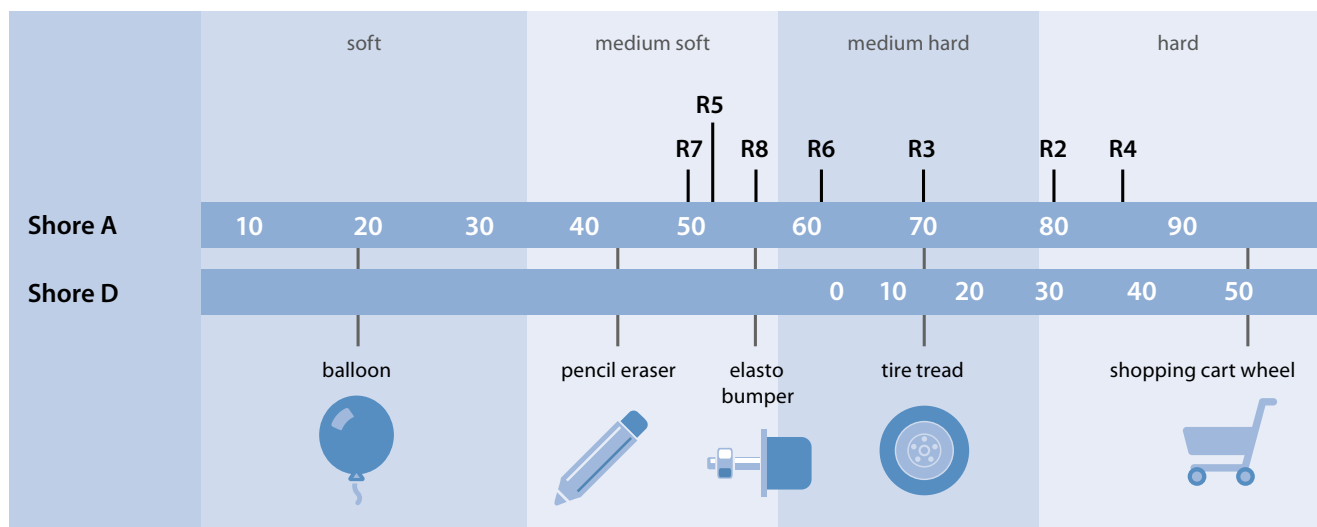

### Metals

Material		AISI	Alloy type	Acid resistant	Temp. range		Approved for food contact		Magnetic
Code	No.				°C	°F	FDA	EU 1935	
CS	1.0570	ST52-3	carbon steel	−	−70/500	−95/930	No	No	Yes
ZN	1.0570	ST52-3	zinc-plated carbon steel	+	−70/500	−95/930	No	No	Yes
SS	1.4301	304	austenitic Cr-Ni stainless steel	++	−70/420	−95/790	Yes	Yes	No*
SSS	1.4404	316	austenitic Cr-Ni-Mo SS "Acid resistance"	+++	−70/420	−95/790	Yes	Yes	No*

\* Processing/machining of these can result in a minor magnetic field.




# 3 ENGINEERING GUIDELINES

- 3.1 Basics
- 3.2 Conveyor design
- 3.3 Conveyor layouts

## 3.1 BASICS

### Factors affecting belt life

The following figure show the qualitative effects on the lifetime of a modular belt.

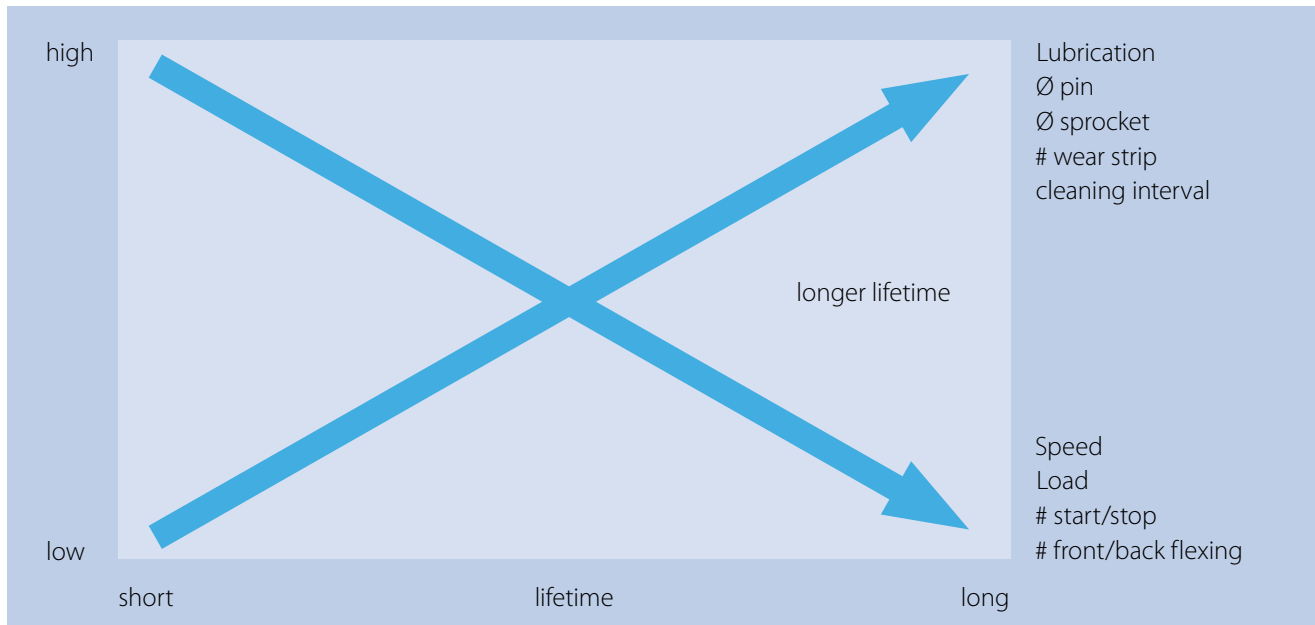

### General conveyor considerations

#### Clearance

Always leave enough space between the belt, wearstrip, guiding, and other conveyor components to avoid excessive wear. Keep fabrication and temperature variation in mind when determining the dimensions.

#### (Wearstrip) Alignment

For long and worry-free operation, the alignment between the belt support and belt must be accurate. This will avoid unnecessary resistance, pinch points and excessive premature wear.

#### Speed

We recommend soft motor starts and stops from speeds faster than 20 m/min or utilizations of more than 70%. Keep in mind that temperature increases with higher speed and ensure the wearstrips don't overheat under load at high speeds. Furthermore it is recommended to make use of soft motor starts if product stability is an important criterion.

#### Length

The maximum conveyor length is generally limited by the maximum belt strength, but it can also be limited by the effects of elastic pulsation. This effect may occur if the belt stretches under load and the stored spring force in the belt is strong enough to accelerate a part of the belt. This does not depend on belt width, but on the spring force constant of the belt and belt material. This is especially important to avoid where product stability or continuous movement (for worker belts) is key.

Among other things, the main factors are conveyor length, belt speed and product weight. Generally, the risk of pulsation decreases with higher speed and shorter conveyors, and increases the other way around. Other ways to maximize the allowable conveyor length are to reduce the friction between the belt and wearstrips or choose a rigid belt design with stiff material (e.g. POM).

### Sprockets


We recommend an odd number of sprockets to always have a center sprocket. Only fix the center sprocket and allow the other sprockets to move laterally to cover the expansion of belt width with temperature.

For the Siegling Prolink Series 11 belt, please see our Series 11 guidelines for the recommended sprocket quantities, locations and sprocket locking system.

### Expansion/Contraction with temperature

Plastics can expand or contract significantly when temperatures fluctuate. The construction or design engineer must make allowances for changes in belt lengths and widths if the operating temperature differs from the ambient temperature. This affects the belt sag on the returnway and the lateral clearance on the conveyor frame. Calculation formulas are given in chapter 4.4.

## Basic terms and dimension definitions

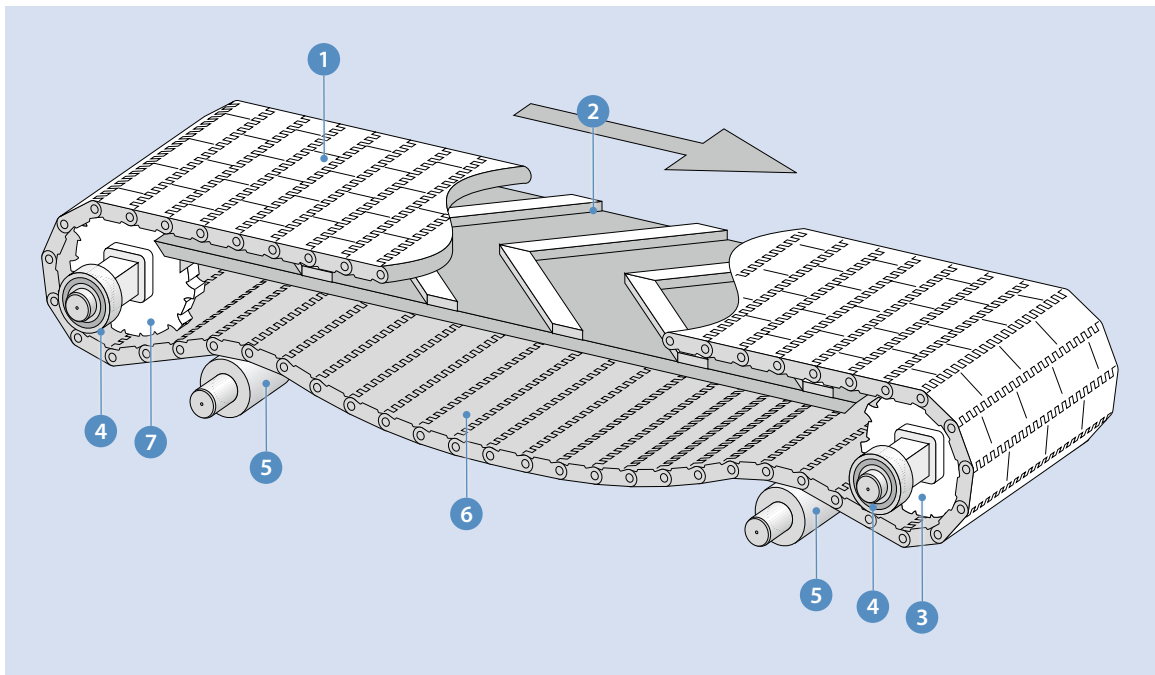

- ① Siegling Prolink Modular Belt
- ② Carryway with wearstrips
- ③ Drive sprocket/drive shaft
- ④ Bearing
- ⑤ Returnway roller
- ⑥ Catenary sag
- ⑦ Idle sprocket/idle shaft

## 3.2 CONVEYOR DESIGN

### Shaft ③ ⑦

#### Shaft profile

In general, we recommend a square shaft. The main advantage of this design is that positive drive and tracking are possible without keys and keyways. This can save on manufacturing costs. In addition, this form facilitates the lateral movement of the sprockets in the event of temperature variations.


Occasionally round shafts with feather keys are also used for low-loaded, narrow belts. Specially designed sprockets with bore and keyway are available.

#### Alignment of shafts

Conveyor frame and shafts must be level. Furthermore the shafts need to be correctly placed in respect to each other, meaning a parallel alignment for straight conveyors and a perpendicular alignment for 90° side flexing conveyors. For straight conveyors, the shaft alignment can be checked with an easy procedure described as follows.

Measure the distance between the ends of the shafts diagonally according to the figure. If the distances are equal, the shafts are aligned. Ensure that the axis to axis distance has the correct value after the shafts are aligned.

If the distance between shafts is too long or the direct beeline is blocked you can measure the distance from shaft ends to a point A on an imaginary line drawn between the center of both axes of the shafts.

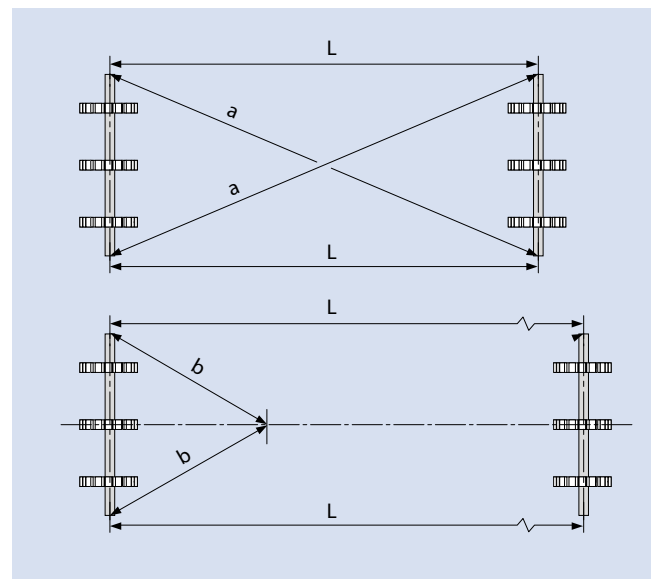


#### Shaft deflection

The drive shaft deflects because of the belt pull force acting on it. This effect increases with a greater bearing distance and smaller shafts.

The shaft deflection is to be kept down to minimize fatigue and to have a small and uniform transfer gap. We recommend keeping the deflection below 2 mm. If the belt pull force leads to a deflection of over 2 mm, choose a thicker shaft or, especially with conveyors with a wide belt width, install an intermediate bearing or split the shaft into sections.

The calculation formulas for deflection can be found in chapter 4.3. You can also use our Engineering program.

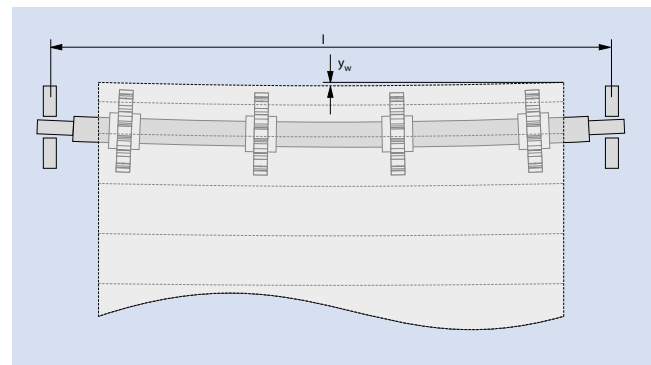




### Shaft torsion

As a result of belt pull, the shaft will twist as a result of the torque from drive end to last sprocket. Therefore the torsion will increase with longer and thinner shafts, higher belt pull and bigger sprockets. If the twist is too high, the belt might come off the track or sprocket engagement will fail. We recommend not exceeding the torsion angle  $\phi$  (phi)  $< 0.5\%$  per meter of shaft length.


Calculation formulas for shaft torsion can be found in chapter 4.3.

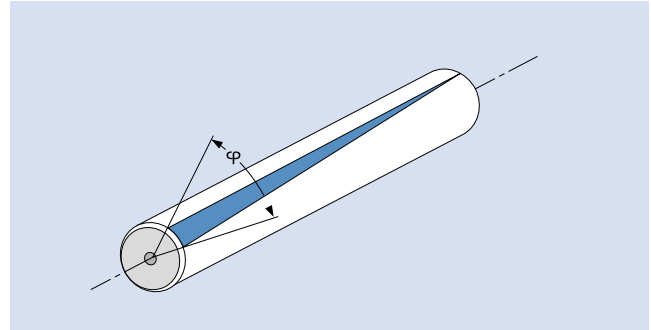

## Drive configurations


### Head drive

This configuration includes one motor on the conveyor head pulling the belt. We recommend having a contact arc of  $180^\circ$  to ensure proper engagement.

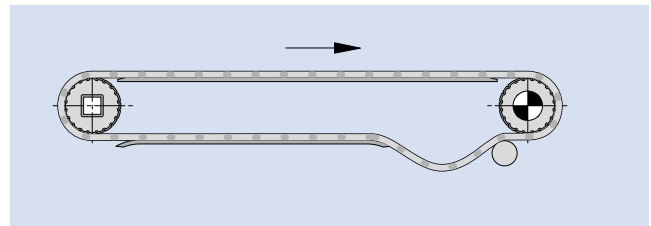

### Lower head drive

This is a variant of the head drive where the drive shaft is moved down which allows for a small roller or nose bar to reduce the transfer gap to a minimum.

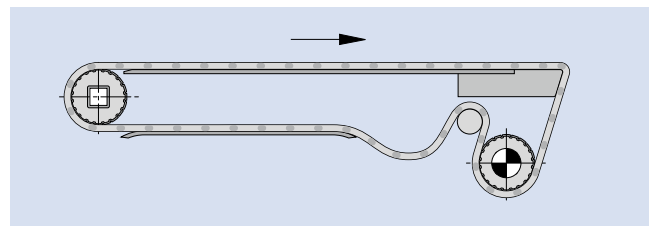

## 3.2 CONVEYOR DESIGN


### Tail drive (Pusher configuration) and alternating tail-head drive configuration

Head-driven conveyors are considered the conventional configuration. It is only when the conveying direction is reversed that the conveyor become tail-driven and the drive unit has to push the belt and its load. If the tension on the returnway is not greater than on the upper side, the belt will jump sprockets.

An approximate value for the tension on the returnway is  $1.2 \cdot F_U$ . This automatically leads to a greater shaft load.

$$F_s = 2.2 \cdot F_U$$


When tensioning the belt, never exceed a belt elongation of more than 2 %. If the belt is tensioned correctly this drive configuration can work well, but keep in mind that due to higher tension the belt life will be reduced.

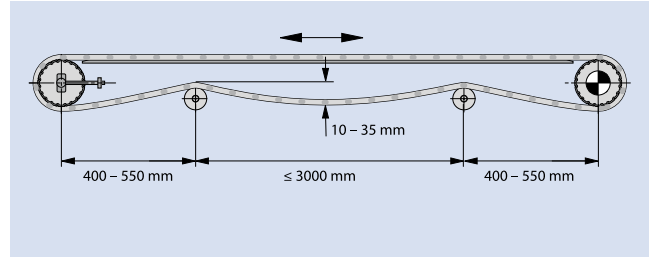

### Two-motor design

Advantages: Low tension on the returnway, making smaller shaft loads possible and a longer belt life than a one-motor design for bi-directional conveyors.

Disadvantage: Increased costs due to additional motor and electronic control. For larger conveyors with relatively heavy loads, however, this system may still be the most reasonably priced.

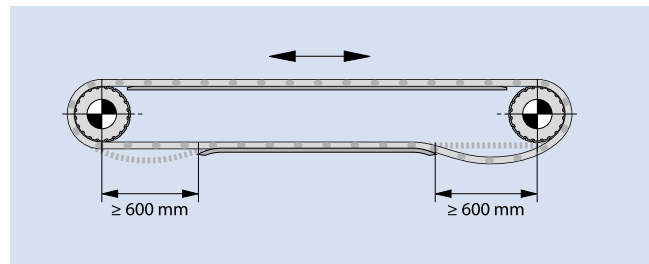


### Center drive

For reversing operation, the drive shaft must be located as close to the middle as possible. To the right and the left of the drive unit, areas with belt sag must be provided, since these are necessary for the required belt tension the belt length between the load bearing rollers needs to be smaller than the distance from load bearing roller to next support roller. Otherwise there are weighted rollers necessary.

The 180° arc of contact on the drive shaft means belt and sprocket engage well which allows for ideal power transmission in both operational directions.

The location of the drive unit causes more stress on the shafts at the ends of the conveyor as there is effective pull on both the upper and returnway in the form of belt tension.

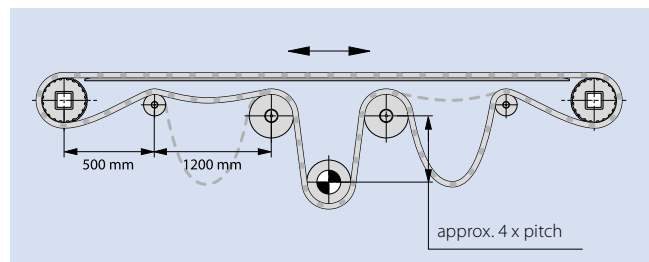

### Catenary sag/control of belt length ⑥

There are various causes for changes in the belt length, e.g.

- elongation or contraction of the belt due to temperature variation
- wear of the connecting rods as well as enlargement of the connecting rod holes in the modules after a certain “break-in time” (enlargement of holes, 0.5 mm or larger holes in a 50 mm module results in an elongation of 1 %)

Therefore we recommend not supporting one (or several) sections on the returnway and using the resulting belt sag to compensate for the increase in length. It is important that perfect engagement between belt and sprocket is ensured. Please see the following examples:

a) Short conveyor (1)

b) Medium length conveyors, up to a center distance of approx. 4000 mm (2)

c) Long conveyors:

center distance > 20000 mm and low speeds

center distance < 15000 mm and high speeds (3)

Recommendation: Distance of support rollers not equidistant, to reduce a frequently stimulation.

Another effective method for compensating for belt elongation is a load-dependent take-up system (e.g. weighted roller).


This should be located as close to the drive shaft as possible since the take-up system will ensure even tension on the returnway and therefore perfect engagement between sprocket and belt (4).

It is recommended that the roller be guided sideways. Keep in mind that a weighted roller cannot be used when Hold Down Tabs or guided side modules are used.


The choice of weights for the take-up system depends on many factors.

In general, the take-up system should form the “excess” belt at “one” point of the returnway. The weight must therefore be selected accordingly. (If you have any questions, please contact our customer service)


Recommended diameters and weights for conveyor with a center distance up to 10 m (see chart):

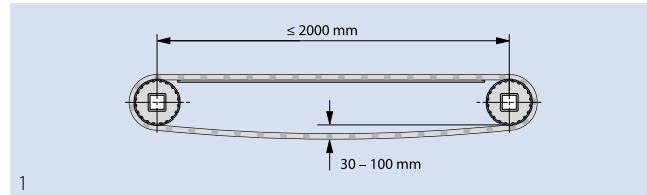


1

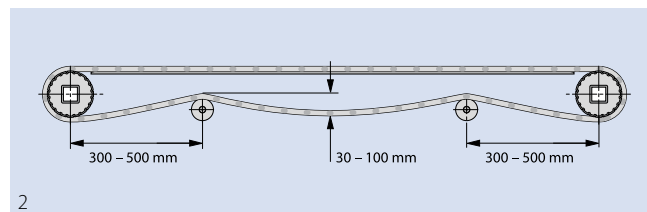

2

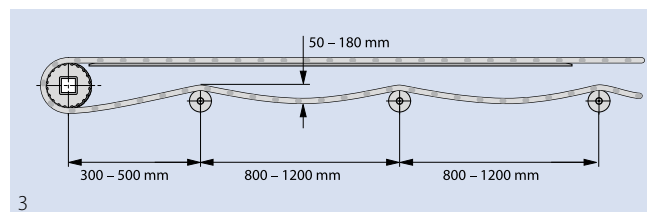

3

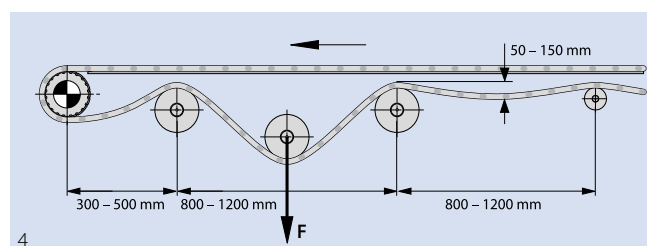

4

Series	Diameter [mm]	approx. weight per meter belt width [kg/m]
1, 3, 7	150	30
2, 4.1, 14, 15	100	15
6.1, 9	100	60
5, 8, 10, 11, 17, 18	100	30
13	50	10

## 3.2 CONVEYOR DESIGN

### Sprockets

#### Chordal action/Size of sprockets

What is known as chordal action is typical for all sprocket-driven belts, chains etc. The rise and fall of a module during the slewing motion cause changes in the linear speed of the belt. The number of teeth on the sprocket is the decisive factor for these periodic fluctuations in speed. See figure.

As the number of teeth increases, the percentage change in speed decreases. In practice this means that the largest number of teeth possible must be used if the goods are not to tip or if for other reasons a more consistent belt speed is required.

To determine the right number of teeth, keep in mind that with bigger sprockets the transmissible torque and shaft torsion increases. If the torsion is too great, the sprocket teeth and belt cannot engage properly, resulting in higher wear or damage to sprockets and belt. Furthermore it might lead to thicker shafts and more powerful motors, meaning higher costs.




Choose a sprocket size big enough to reduce the chordal action effect to the required degree, and small enough to reduce torsion and the motor power required to a reasonable level.

For correct shaft dimensioning see the calculations in chapter 4.3.

#### Snub Roller 5


Use a snub roller on the returnway to ensure an arc of contact of around 180°.

(This does not apply to conveyors with a center-to-center distance smaller than 2 m. Rollers on the returnway are not necessary here.)

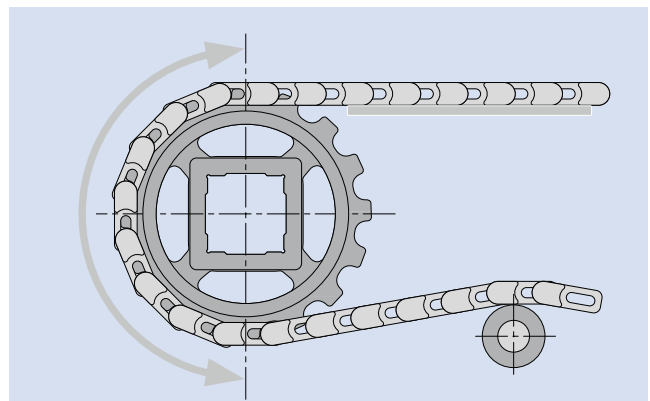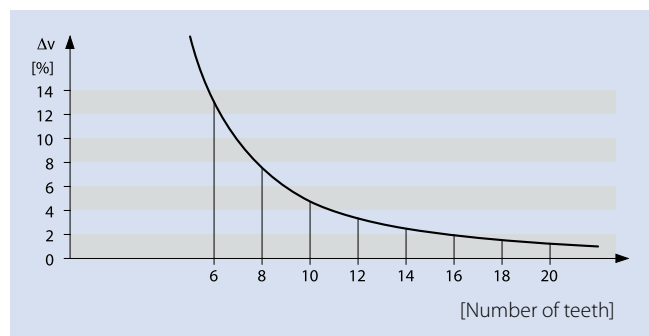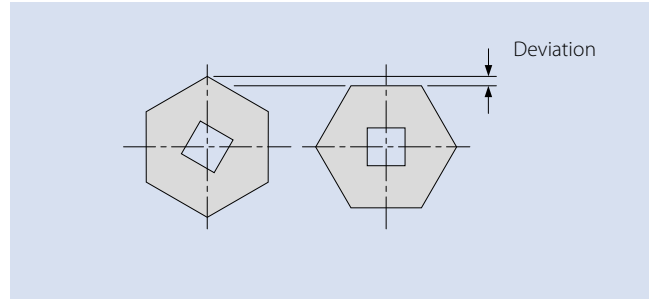


**Sprocket position relative to wearstrips**

If parallel wearstrips are used, we recommend placing them between the sprockets to ensure support until the sprocket takes over and minimize gap.

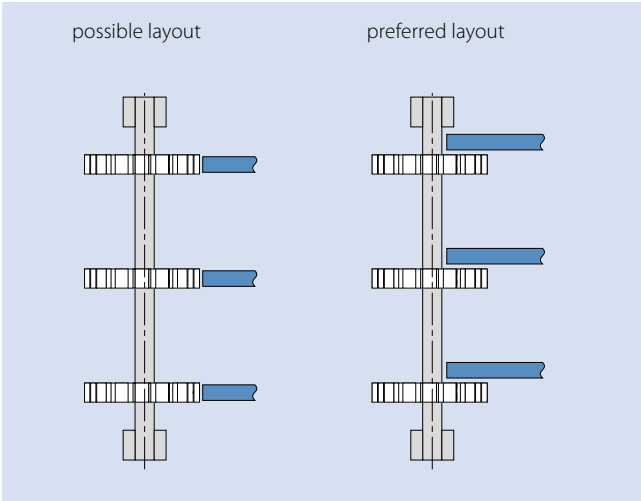

If wearstrips end at the sprocket edge, ensure a distance of  $X \leq 1.5 \text{ Pitch}$ .

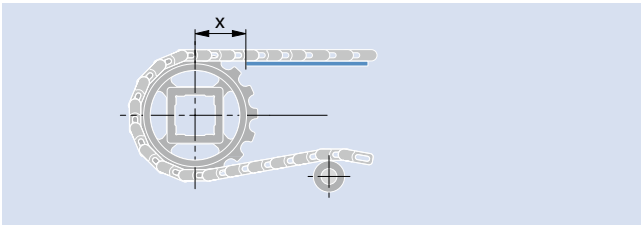

**Number of sprockets**

As a rule of thumb, sprocket spacing should not exceed 160 mm. By dividing the belt width by 150 mm, rounding the result up and adding 1 you get the minimum number of sprockets needed.

If you end up with an even number, we recommend adding another sprocket to achieve an odd number in order to have a true center sprocket. An exception can be made for narrow belts < 300 mm. Here only two sprockets are sufficient, but never install a belt with only a single sprocket.

The number of sprockets might need to be increased depending on the load: The number of drive sprockets required is calculated by the ratio between the adjusted and admissible belt pull. See Chapter 4 Calculations. Alternatively the Siegling Prolink Calculation Program calculates the number of sprockets required.

Ratio $\left[ \frac{F_{adj}}{F_{adm}} \right]$	Maximum distance between*	
	drive sprockets	drive split sprockets/ S17
≤ 20 %	160 mm (6.3 in)	135 mm (5.3 in)
≤ 40 %	100 mm (3.9 in)	80 mm (3.2 in)
≤ 60 %	80 mm (3.1 in)	65 mm (2.5 in)
≤ 80 %	60 mm (2.4 in)	50 mm (2 in)
> 80 %	please inquire	please inquire

\* For Series 11 maximum distance should never exceed 75 mm.


## 3.2 CONVEYOR DESIGN

### Sprocket fastening


Typically only one sprocket (as close to the center as possible) must be fastened axially on each idle or drive shaft. The design of this sprocket enables positive tracking of the belt. All other sprockets must be allowed to move laterally on the shaft to move with the belt as its dimensions will change with temperature.

Examples of possible methods for fastening a sprocket are shown below:


For wide belts with retainer rings can also be installed at the bore ends to prevent sprockets from slipping off of the bore, but always leave enough space for sprockets to move on the bore with the belt due to temperature expansion.

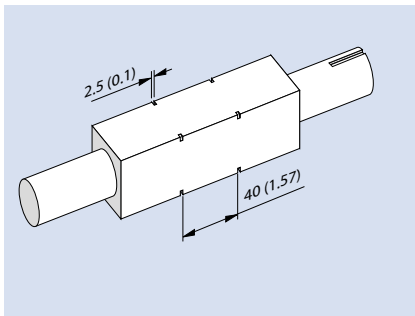

Shaft 40 x 40 mm. Fastening the sprocket with a retainer ring in accordance with DIN 471 (Seeger circlip ring),  $d = 56$  mm. Detailed dimensions are to be found in appendix on page VI-13.

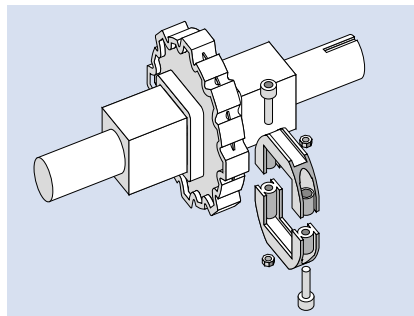

Siegling Prolink Retainer Rings provides a quick, easy and reliable solution for fixing the sprocket (see page I-220 for details).

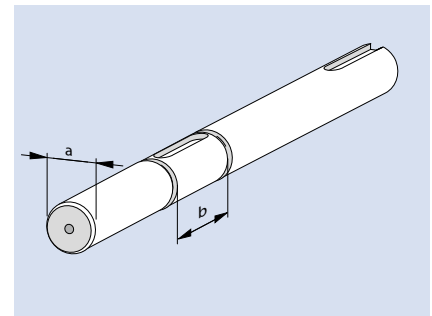

Fixation of the sprocket with retainer rings in accordance with DIN 471 (Seeger circlip ring).

### Rollers as idle shaft

The idle shaft is usually equipped in the same fashion as the drive shaft. This allows lateral tracking on both ends of the conveyor. In special cases it might be necessary to replace the idle shaft with a roller, e.g. wide belts with high loads to

avoid installation of intermediate bearings. If you take that approach, pay special attention to the lateral guiding. For example, edge wearstrips can be installed to guide the belt.

# Carryway with wearstrip ②

Standard plastic wearstrips are available from many plastic suppliers. The width should be approx. 30 – 40 mm, whereby the thickness depends on the height of the screw heads. We recommend using UHMW-PE or PE 1000 materials for the wearstrips. Alternatively, in some cases hardwood or steel can be used. For the optimal choice of wearstrip material, see the table below.

Running conditions	Wearstrip material	Temperature	
		min	max
Low load and low speed	HMW-PE (PEHD500) Not recommended for any side-flexing conveyor where wearstrips are exposed to radial forces	– 70 °C (– 94 °F)	+ 65 °C (+ 149 °F)
High load and low speed	UHMW-PE (PEHD1000)	– 70 °C (– 94 °F)	+ 65 °C (+ 149 °F)
High load and high speed, dry	Nylatron NSM or comparable cast nylon 6 formulation containing solid lubricant additives (the use of oil impregnated wearstrips can result in unwanted clustering of dust on belt and wearstrip)	– 40 °C (– 40 °F)	+ 120 °C (+ 248 °F)
Wet, very abrasive or high temperature	Stainless steel (cold-rolled austenitic) (Softer annealed austenitic grades are <b>not</b> recommended)	– 70 °C (– 94 °F)	+ 155 °C (+ 311 °F)

If you are unsure please contact customer service.

## Wearstrip arrangement


Continuous plate support made of steel or plastic.  
We recommend this for conveyors with heavy loads.

Straight parallel wearstrips (1). This is an inexpensive solution for applications with minimal loads. The belt wear is limited to the areas where the wearstrips support the belt. We recommend a distance of approx. 100 – 150 mm between the wearstrips.

The belt is supported over the entire width by a V-shaped arrangement of the wearstrips (2). This spreads the wear and tear evenly and means heavy loads can be applied. Choose the angle and distance such that the Vs are overlapping and a support across the belt width with a distance of not more than 100 – 150 mm is maintained.

On the returnway, parallel wearstrips with a distance of approx. 200 mm are recommended. Alternatively, snub rollers can be used. Support is always provided in areas where no profiles, rollers, Friction Top Pattern etc. are fitted.

Rollers are not generally used to support the belt on the upper face. Unavoidable belt sag between the rollers as well as the chordal action of the drive unit (see page III-9) mean the goods are tipped which can cause problems. Sometimes rollers are used for conveying bulk goods.

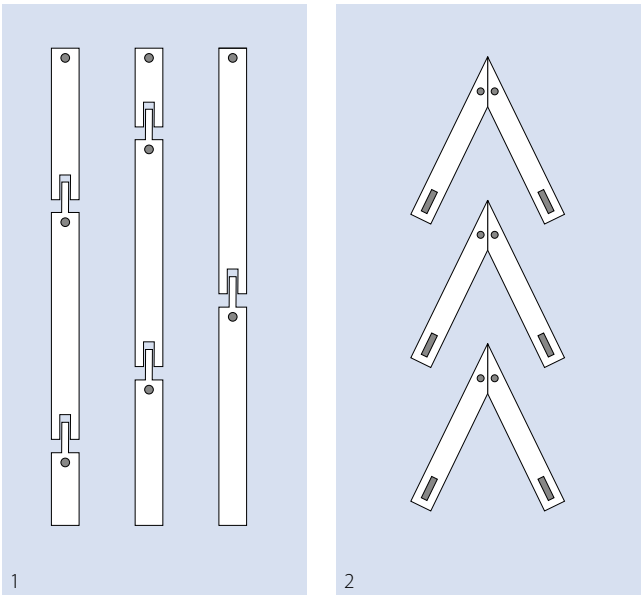


## 3.2 CONVEYOR DESIGN


Thermal expansion and contraction must be taken into consideration when mounting the support. These effects can be absorbed by slots and appropriate distancing between the wearstrips (see calculation in “Effect of temperature” in chapter 4.4). The admissible temperature ranges, as given by the manufacturer, must also correspond to the expected operating conditions.

If the belt is supported sideways, ensure that a minimum space of 0.2 % of the belt width but at least 2 mm is maintained at the highest operating temperature.

### Carryway

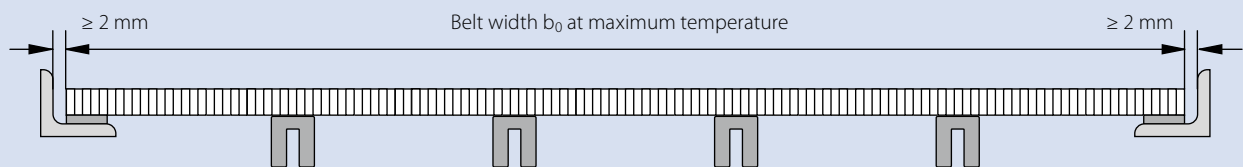

### Returnway


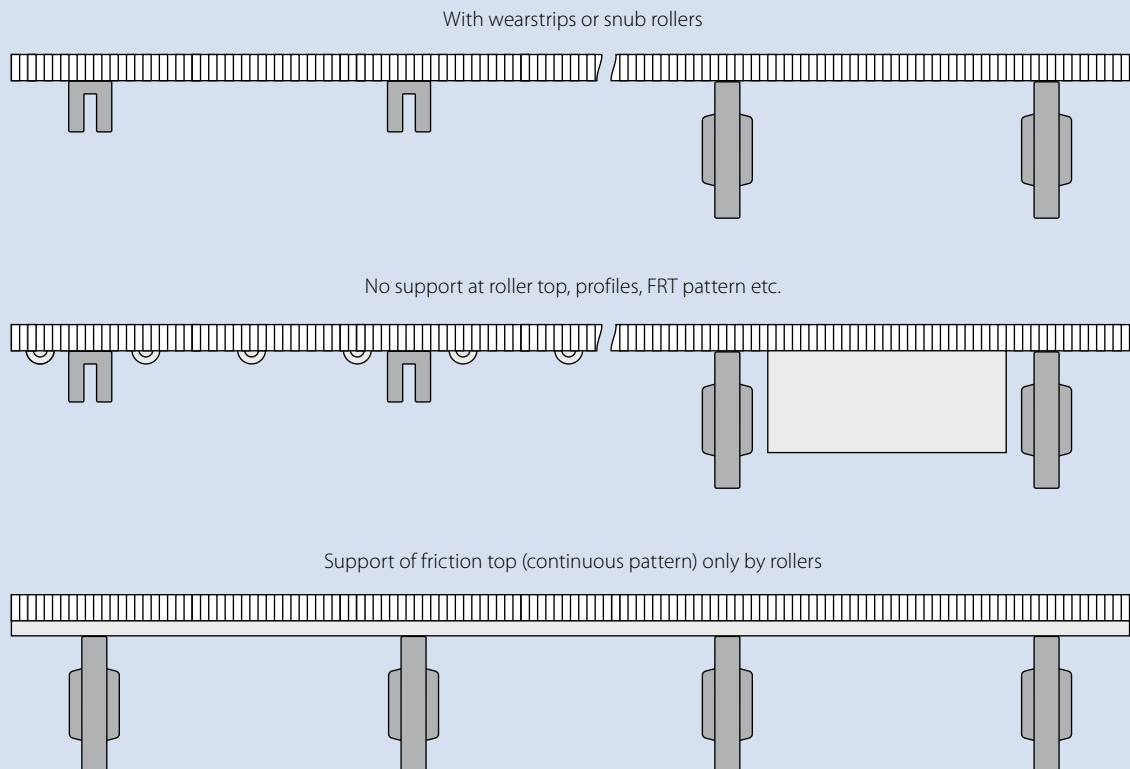




## Height positioning of wearstrips

Chordal action makes it impossible for the wearstrips to always be at the optimal height relative to the sprocket. If you level the top surface of the wearstrip to the down point  $A_{min}$ , the belt will lift up on the upper point causing periodic noises when falling down again on the wearstrip. If you level the wearstrip to the upper point  $A_{max}$ , you will create forces on the wearstrip edge causing excessive wear and/or bending the wearstrip down.


On the sprocket data sheets you find a calculated value for  $A$ . The real value will differ slightly due to manufacturing tolerances and temperature-related expansion/contraction, therefore a slight adaption of this value might be necessary to fit your specific needs.

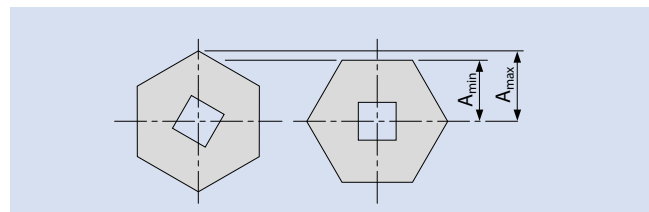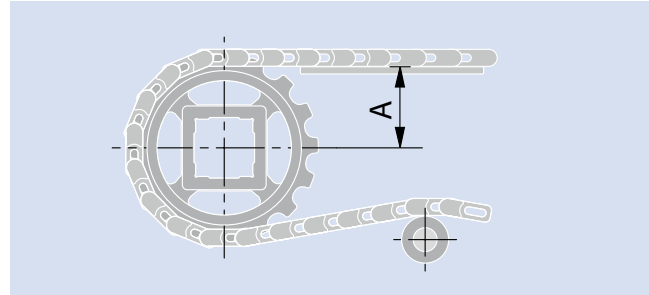


Attributes effects application	$A_{max}$		$A_{min}$	
	Advantage	Disadvantage	Advantage	Disadvantage
High belt speed		Higher heat generation especially with full width slider beds	Lower heat generation	Creates more noise and vibration
High load	Uniform belt motion at the discharge section	Generates heat especially with full width slider beds. A large radii at this edge is required.	Increases the wearstrips life Decreases the potential for static charges to form Belt is less bent/stressed at the transition between carryway and sprockets	Belt continuously lifts off of sliding support; not recommended for applications where product positioning and orientation is critical; not recommended for very light goods
Sprocket wrap		Is reduced which allows for higher force distribution per engaged tooth	Is increased which allows for lower force distribution per engaged tooth	
Tooth engagement		Is reduced. Thereby worse force distribution over teeth flank	Is raised. Thereby better force distribution over teeth flank	
Curved conveyors	Reduces belt lift-off from carryway			Creates more belt lift-off from carryway
Abrasion behaviour		Higher	Lower	
Impact load	Lower			Higher
Applications with heavy goods	Less additional load on sprockets and shafts at transition to neighboring conveyors			Higher additional load on sprockets and shafts at transition to neighboring conveyors
Ground integrated conveyor	Belt protrudes less			Belt protrudes more
Noise sensitive applications	Lower noise level			Higher noise level due to belt lift-off and set down
Prevent tipping/movement of products	Better since there is no belt lift-off and set down on the sliding support			Worse due to the belt lift-off and set down on the sliding support

# 3.2 CONVEYOR DESIGN


## Wearstrip dimensions

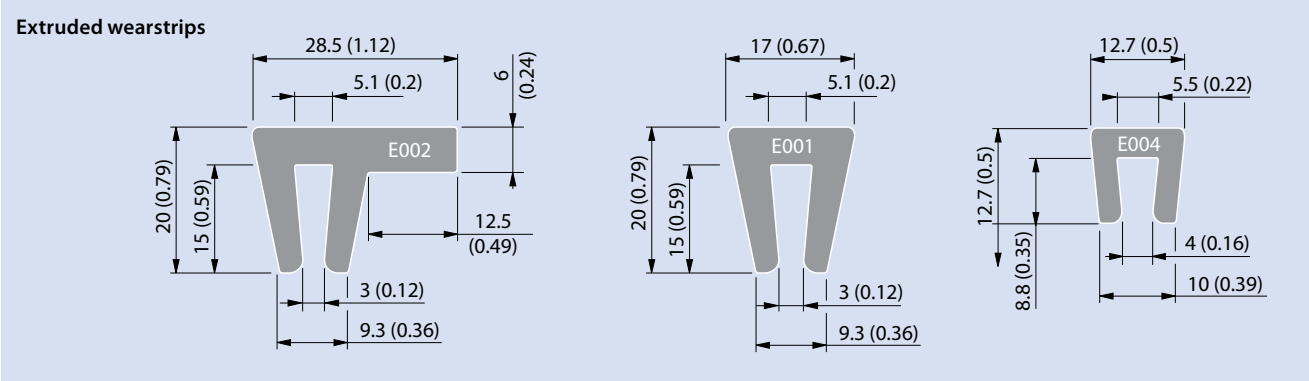

## Wearstrip dimensions Series 11 with caps

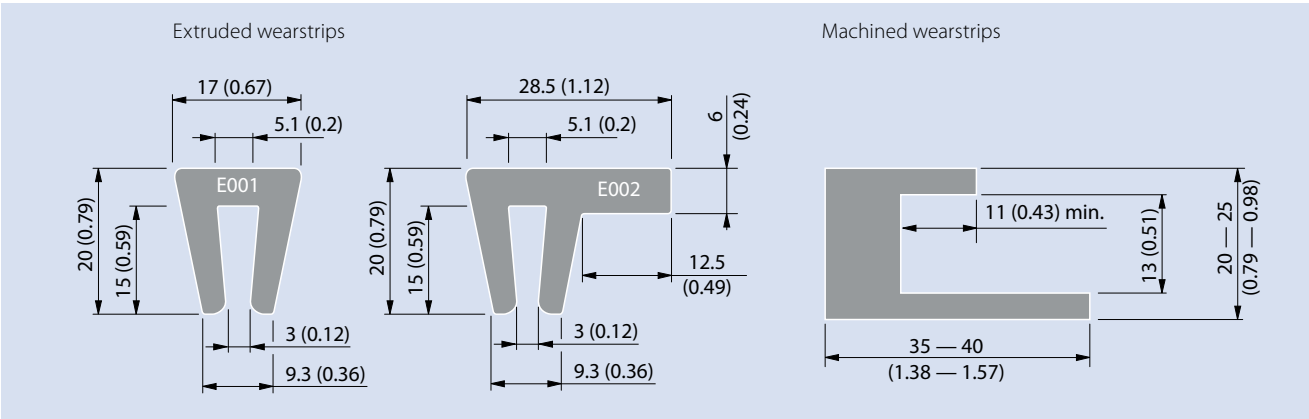

## Wearstrip dimensions Series 11 with Hold Down caps

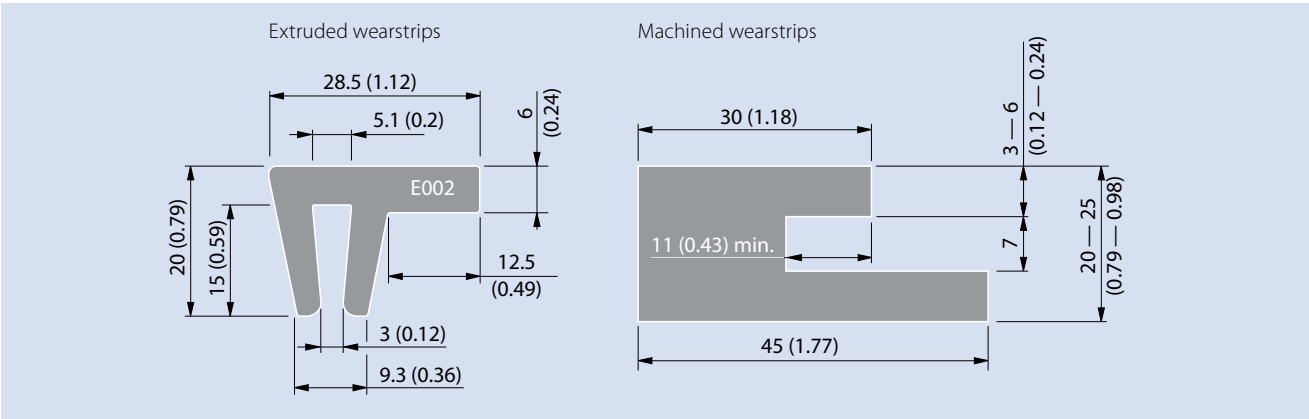


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.

Nose bar configuration


Free rotating nose bars are preferred, because the belt tension, wear and noise level will be increase by using a stationary nose bar (knife edge).

Series	Open	Surface	Pitch		Knife edge Radius minimum r2		Ts		minimum Distance				W	
			[mm]	[in]	[mm]	[in]	[mm]	[in]	L1		L2		[mm]	[in]
13	0	FLT	8	0.31	3	0.12	3	0.12	16	0.63	8	0.31	22	0.87
13	0	NPY	8	0.31	3	0.12	3	0.12	16	0.63	8	0.31	22	0.87
13	0	CTP	8	0.31	3	0.12	3	0.12	16	0.63	8	0.31	22	0.87
13	34	FLT	8	0.31	3	0.12	3	0.12	16	0.63	8	0.31	22	0.87
14	0	FLT	12.7	0.50	9.5	0.38	3	0.12	25.4	1.00	16	0.63	40	1.57
14	25	FLT	12.7	0.50	9.5	0.38	3	0.12	25.4	1.00	16	0.63	40	1.57
15	47	GRT	12.7	0.50	6.35	0.25	3	0.12	25.4	1.00	12	0.47	31	1.22
15	47	RSA	12.7	0.50	6.35	0.25	3	0.12	25.4	1.00	14	0.55	34	1.34

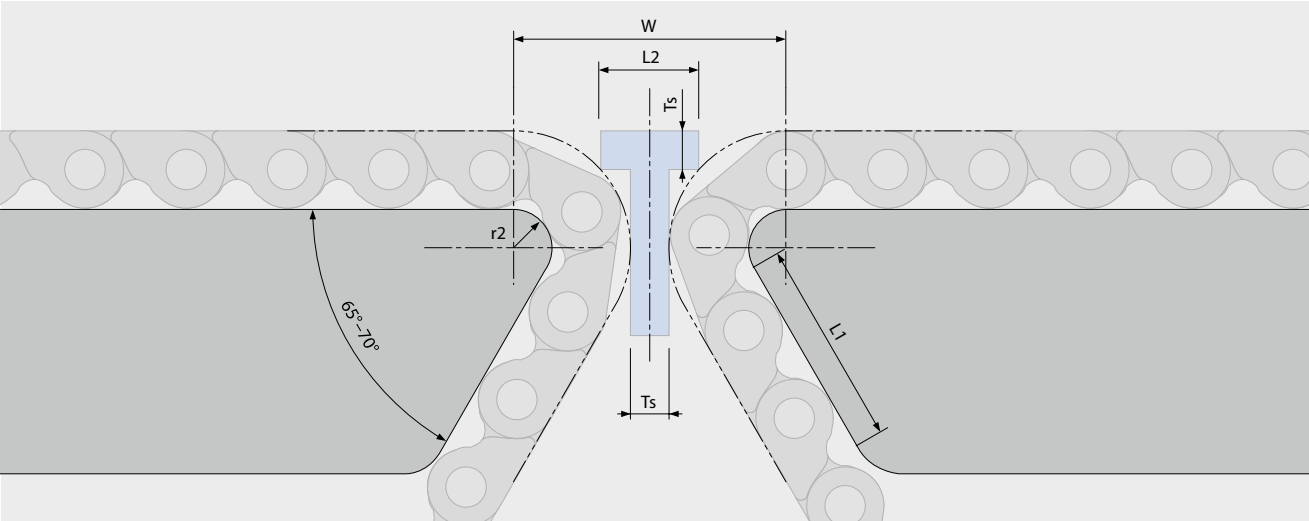


## 3.3 CONVEYOR LAYOUTS


**Straight horizontal**

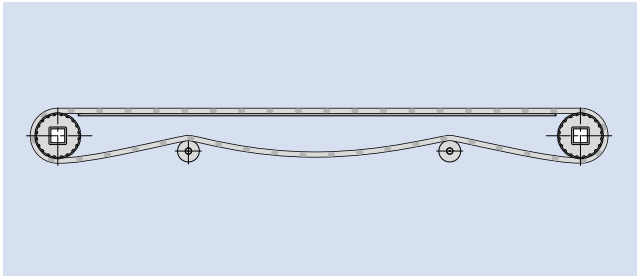


**Straight inclining**

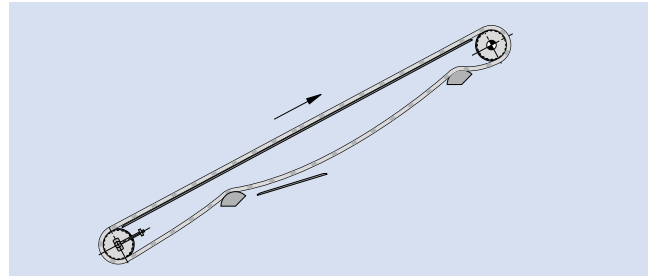


**Straight inclining swan neck**

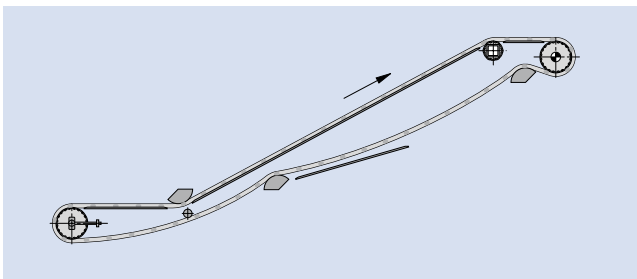


**Straight declining**

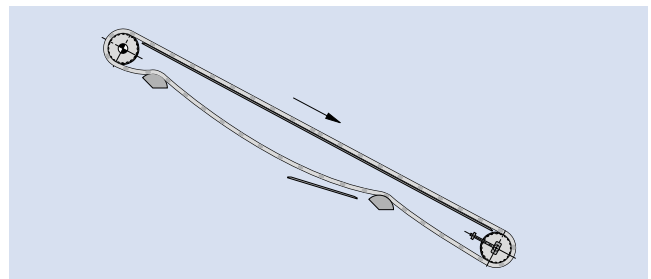


**Side flexing L**

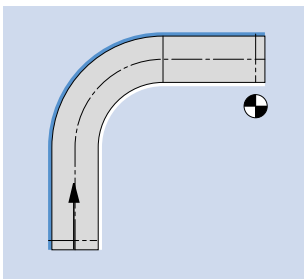


**Side flexing U**

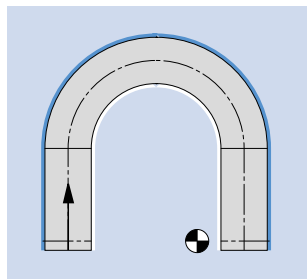





**Side flexing C**

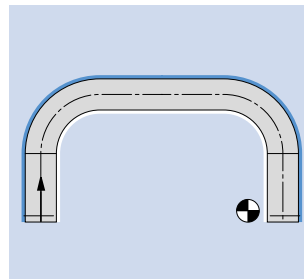


**Side flexing S**

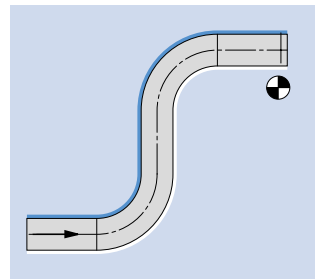

**Spirals**

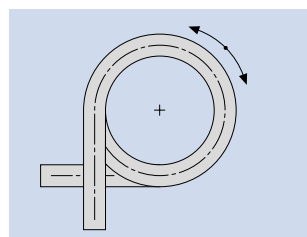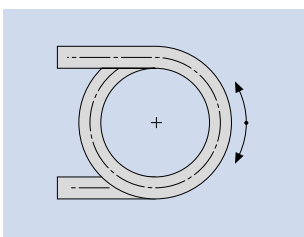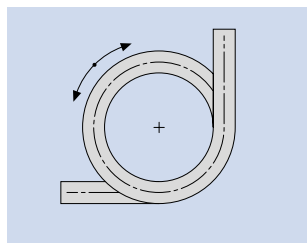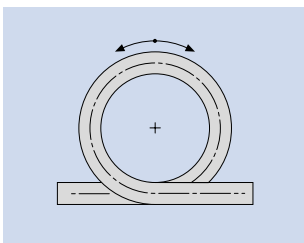

**Double spirals**

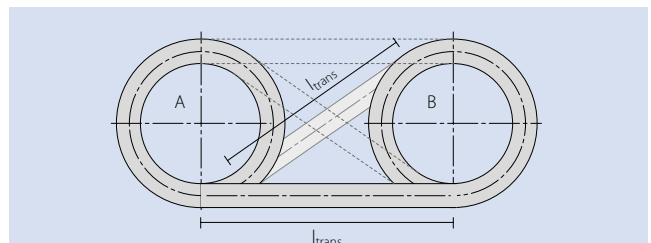

## Incline/Decline




We always recommend the following:

- Only operate with a head drive, i.e. use the upper shaft as the drive shaft.
- Ensure there is always a screw-operated take-up system or a load-dependent tension take-up on the returnway since tension decreases with increasing inclination (caused by the belt sag).
- If sprockets are used at upper intermediate points, the center sprockets may not be fastened axially.
- If rollers are used at upper intermediate points, a minimum radius of approx. 80 mm is required.
- When shoe or wearstrips are used, the radius should be as large as possible in order to keep wear to a minimum. We recommend a minimum radius of approx. 150 mm. The width of the shoe should not be smaller than 30 mm.
- If the belt is more than 600 mm wide, we recommend providing additional support on the belt surface or on the profiles on the returnway.

Rough guideline for achievable inclines:


- Flat top surface (FLT) 3 – 5°
- Friction top surface (FRT) 20 – 40°
- straight profiles < 60°
- bent profiles < 90°

Testing is always recommended to determine the actual possible incline angle for a particular product/use.

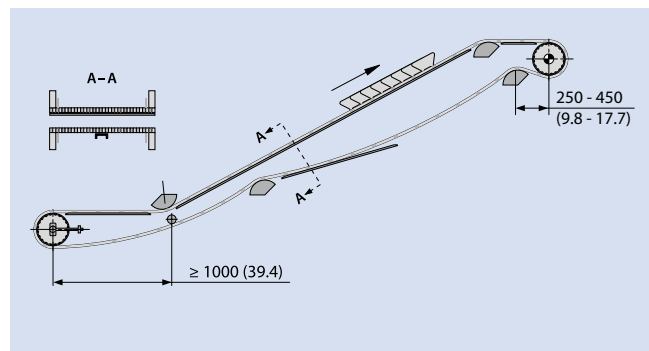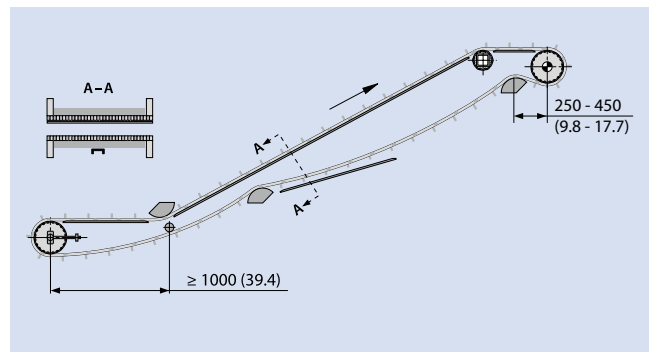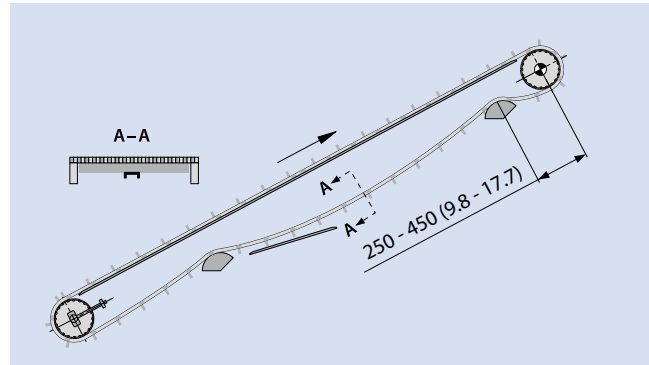


## Decline conveying

For this conveyor design, a tail drive unit is possible if there is an active load-dependent tension take-up at the lower idle shaft (e.g. gravity, spring or pneumatic). Otherwise the general recommendations given above apply here.

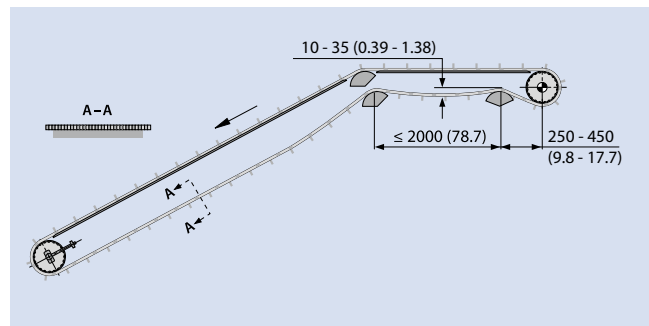

# 3.3 CONVEYOR LAYOUTS


## Hold Down Tabs

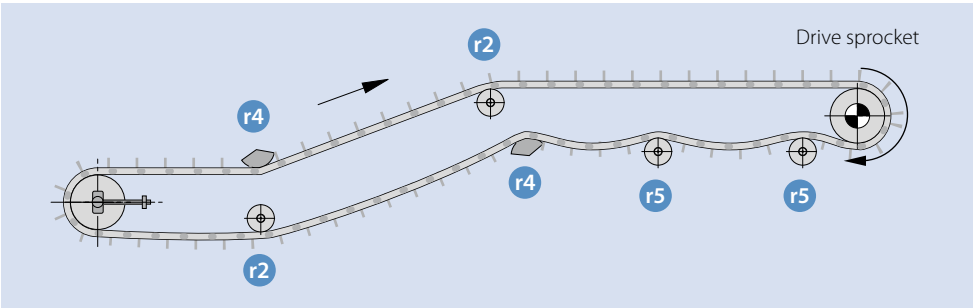


For Z – conveyors (Swan neck) with a belt width above 600–800 mm (24–32 inch) an additional guiding/Hold Down system is necessary. When the belt change direction from vertical to incline/decline for wider belts typically above 600 mm (24 inch) it will not be sufficient to hold down the belt on the (indented) side of the belt. In these cases, Hold Down Tabs on the bottom side of the belt are used to guide it through the back-flexing curve. For minimum back flex radius (r4) for the various series, please refer to our data sheets for recommendations.

It is very important that the wearstrips/guide rails supporting the Hold Down Tabs are very smooth and have sufficient radius at the entrance (red circle beside) to avoid them snagging on the frame entering into the guides. The outer radius of the guiding wearstrips, R6, is defined by the back flex radius r4 adding the C-measure of the Hold Down Tab (see table) and the belt thickness  $h_m$  (see data sheet).

- Please make sure that it will not be possible for the sprocket to engage the belt at the position of the Hold Down Tabs.
- Using Hold Down Tabs results in constraints with regards to sprocket and shaft size to ensure sufficient clearance to the shaft. For the minimum sprocket size and the equivalent maximum bore size when using Hold Down Tabs please consult the data sheet of the Hold Down Tab.
- By default, Hold Down Tabs are placed on every other row. It is not recommended to have a Hold Down Tab directly under a row of profiles.

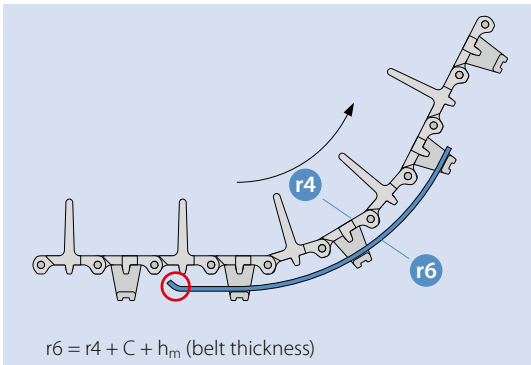

Series	C-Value
S6.1	17 mm (0.67 in)
S8	10 mm (0.39 in)
S10	10 mm (0.39 in)

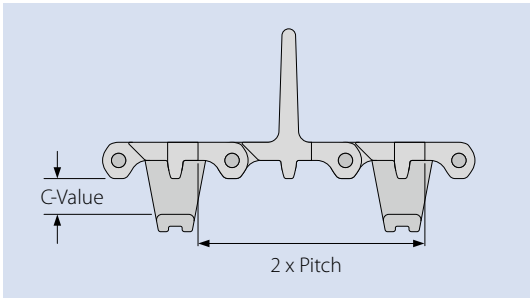

### Correct position for the guiding wearstrips when using hold down tabs


Please note that the hold down tabs cannot always be installed on the center line of the belt. This is dependent on the belt width or the number of width increments. If the number of increments is an odd number, the HDT will be on the center line. If the number of increments is an even number, the HDT will be offset from the center line by half an increment. (To avoid rounding errors, we recommend calculating in the unit of measurement (metric, imperial) of the respective series)

#### S6.1 HDT

##### HDT offset half an increment

Belt width (metric) = 1000 mm (39.37 in)  
Width increment (metric) = 20 mm (0.79 in)  
 $1000 \text{ mm} / 20 \text{ mm} = 50$  = even HDT offset 10 mm  
( $\frac{1}{2}$  an increment)

Example:

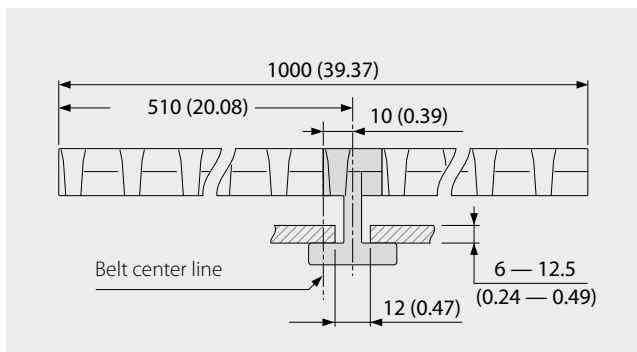


#### S10 HDT

##### HDT in the center line

Belt width (imperial) = 1009.7 mm (39.75 in)  
Width increment (imperial) = 19.1 mm (0.75 in)  
 $39.75 \text{ in} / 0.75 \text{ in} = 53$  = odd = HDT in the center line


Example:

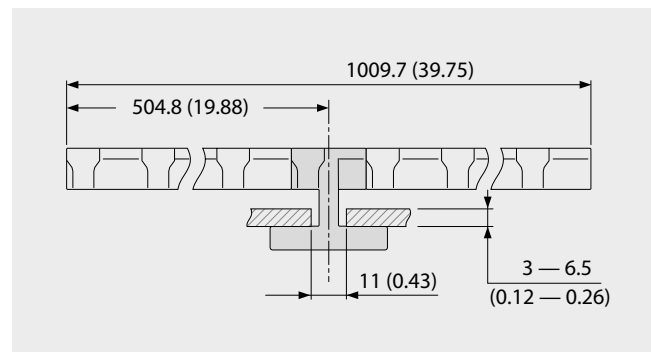


# 3.3 CONVEYOR LAYOUTS

## Belt travel direction


The belts contact to the side wearstrip will cause friction and potential catch points between belt edge and wear stripe or conveyor parts. Our recommendation is, to choose the belt travel direction to press the outside belt edge to the inner belt side (support by inside edge).

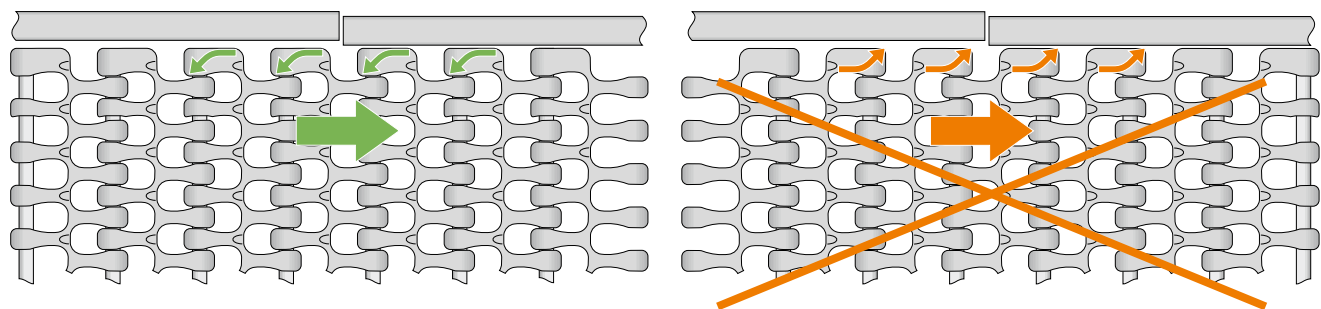

Some of our Prolink belts have a side edge design for a preferred travel direction. The outside belt edge is in one direction (both hands down). Preferred travel direction will press the outside belt edge to the inner belt side. This will reduce the risk of belt edge breakage while touching the frame.

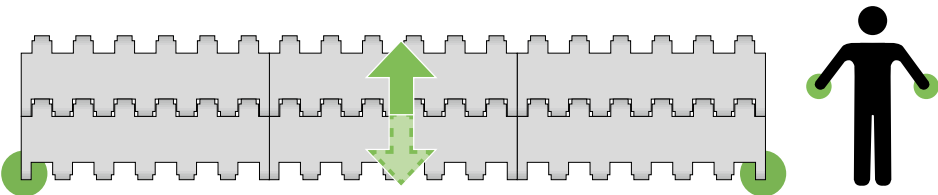

Prolink belts with outside edge in both directions – one side up, one side down – have no preferred travel direction.

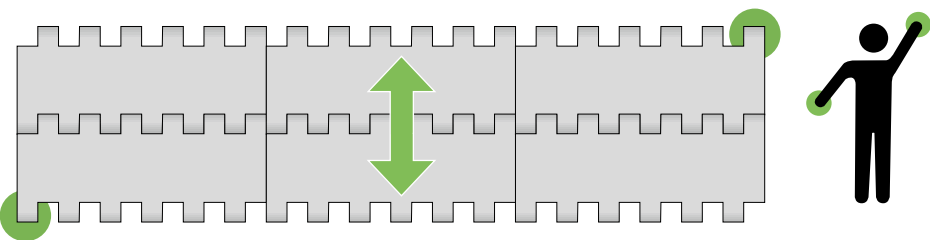

Series	bidirectional	preferred direction
S1	●	
S2		●
S3	●	
S4.1	●	
S5*		●
S6.1	●	
S7	●	
S8	●	
S9*		●
S9.1*		●
S10	●	
S11*		●
S13	●	
S14		●
S15	●	
S17	●	
S18*		●

\* Curve belts (use as straight running belt also possible)



## Side-flexing belts

Siegling Prolink side flexing belts are designed to be able to run in curves. The picture illustrates the possible layouts for curve conveying. The modules of Series 5, 9, 9.1, 11 and 18 create a mesh that allows the belt to collapse on the inner radius of the curve and thereby bend into the curve direction.

The belt pull which is spread over the complete belt width in straight running sections is concentrated in the outer module in curve sections. Therefore always check that  $F_{adj} < F_{nom,curve}$  given in the data sheets is ensured.



Three standard tensioning methods can be used to achieve the correct belt tension:

- Screw-operated take-up system
- Gravity take-up system
- Catenary sag on the returnway near the drive

The following special conditions apply for side-flexing belts. Please ensure that they are met.

### Special recommendations for side flexing belts


These belts must be supported by plastic guides at the sides around the curved section. Some plastics that can be used are PE 1000 or a plastic with lubricating properties on the inner radius.

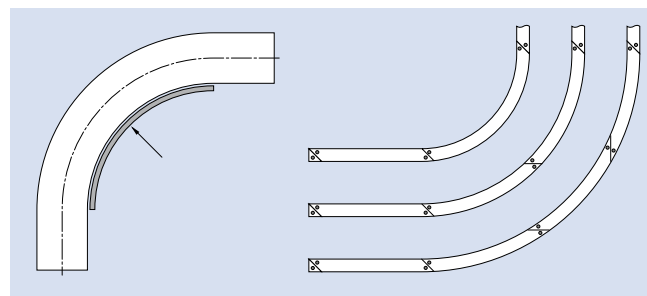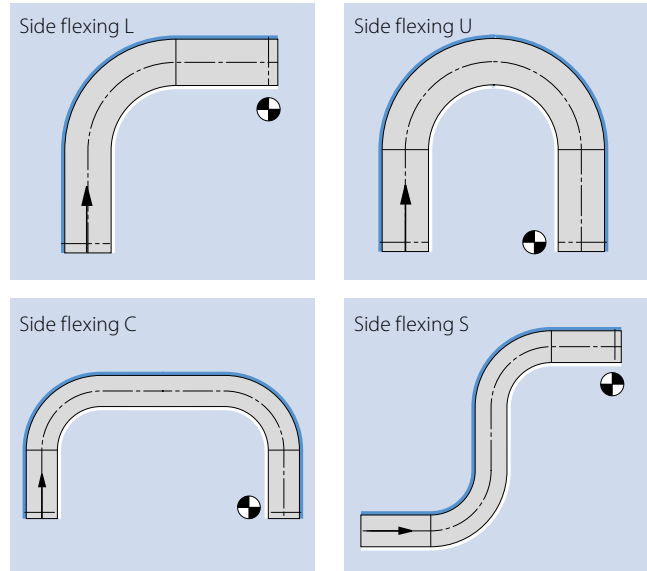

## 3.3 CONVEYOR LAYOUTS


### Geometries of curves

We recommend designing a curved conveyor with the longer straight section on side of the motor (1).

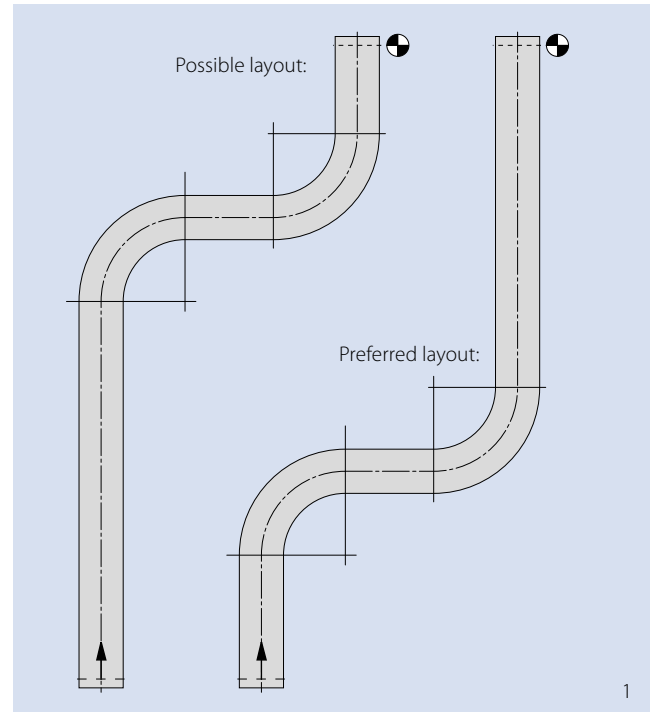

Be aware of a minimum straight section with a distance of one time the belt width before the curve and two times the belt width after and in between curves. This distance in between curves can be reduced if a curve is followed by another one in same direction (2).


Please contact customer service if space is restricted and you cannot construct the conveyor according to these recommendations.

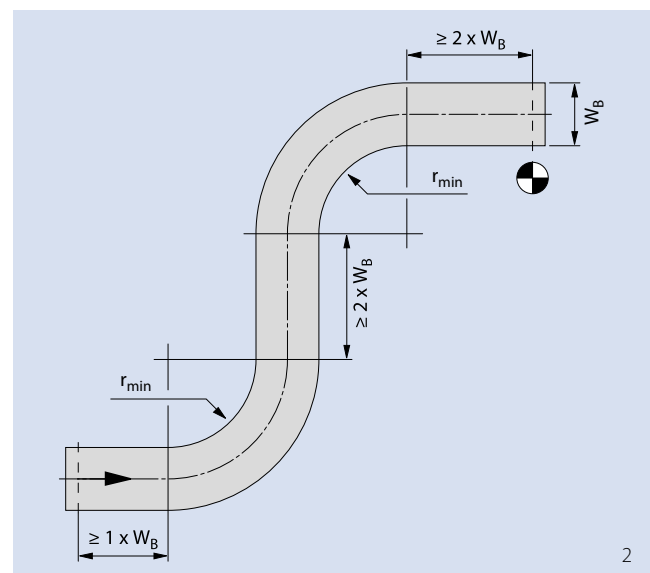

**Belt travel direction**


The belts contact to the inside wearstrip will cause friction and potential catch points between belt edge and wear stripe or conveyor parts. Our recommendation is, to choose the belt travel direction to press the outside belt edge to the inner belt side (support by inside edge).

The belt design will influence the preferred belt travel direction in a curve conveyor.

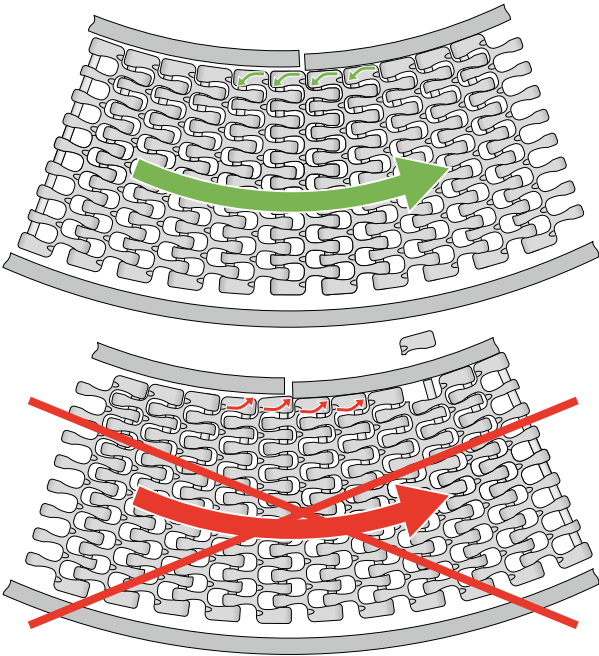


S18-44 GRT

Prolink curve belts can be used in **ClockWise (CW)** and **Counter ClockWise (CCW)** applications. Also dedicated belts for **CW** or **CCW** are available. If there is a combination of both travel directions (S-Conveyor), the last curve before the drive considers the belt travel direction and correct choice of belt.

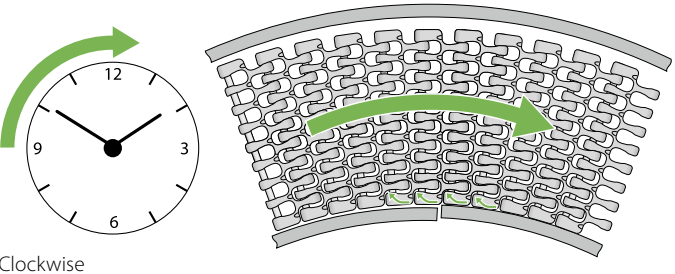

Clockwise

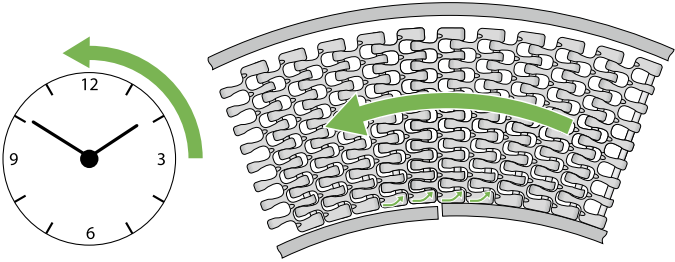


Counterclockwise

Overview of cure belt series with dedicated and non-dedicated travel direction.  
(Non dedicated travel direction is not explicit mention in the belt nomenclature)


	Belt travel direction:		
	CW	CCW	CW and CCW
	Belt nomenclature:		
	CW	CCW	
S5			●
S5 ST/S11 Combo	●		
S9			●
S9.1	●	●	
S11	●	●	
S11/S5 ST Combo		●	
S18	●	●	

# 3.3 CONVEYOR LAYOUTS

Series 5 and Series 9 belts can be used for ClockWise (CW) and Counter ClockWise (CCW) travel direction without any restrictions.

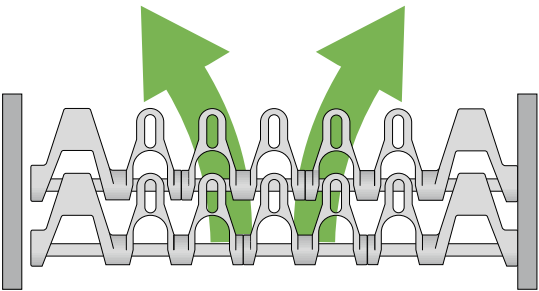


Series 5

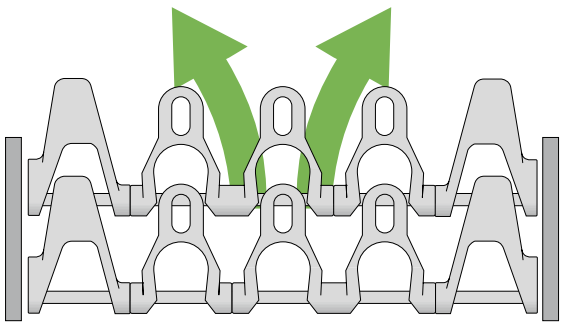


Series 9


A combination of different collapse factor modules in one belt is possible. A dedicated belt running direction CC or CCW should be considered. All our **COMBO belts of Series 5, S11 and S18** will give you this opportunity.

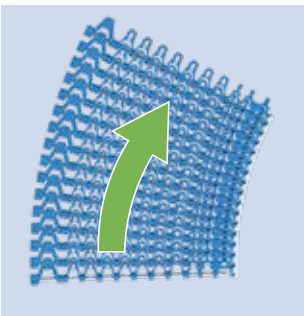


S5 ST/S11-45 GRT CW

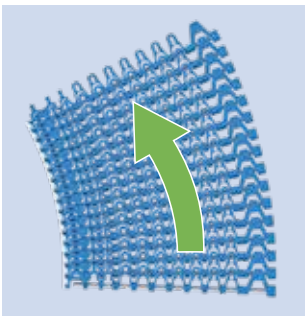

S11/S5 ST-45 GRT CCW

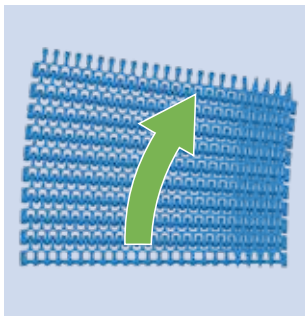


S18-44 GRT CW 2.2/1.7

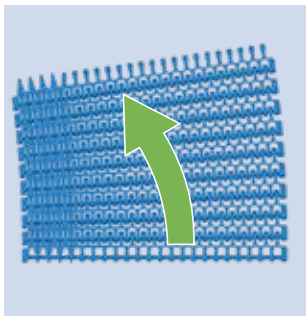


S18-44 GRT CCW 1.7/2.2

Also for **Series 9.1** the belt running direction CC or CCW is to consider:

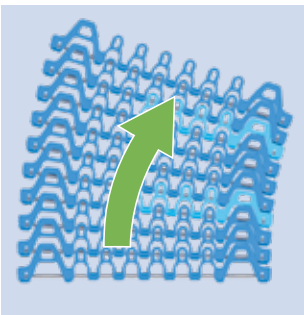


S9.1-57 GRT CW

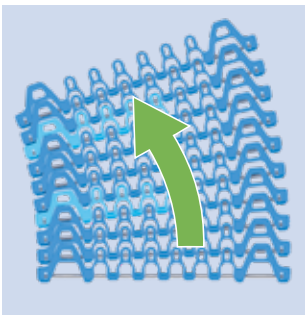


S9.1-57 GRT CCW

To optimize performance and ensure a consistent belt pull capacity, the Series 11 and Series 18 are using a headed hinge pin. This design will ensure the pins are always in contact with the outermost hinge. To benefit from this feature it is important that the pin head is located on the outer radius in the last curve. These belts should also be ordered as ClockWise (CW) or Counter ClockWise (CCW) belts.

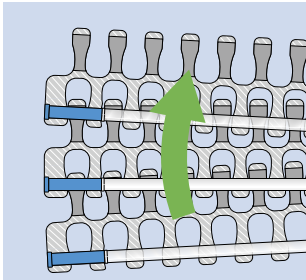

S18-44 GRT CW 2.2

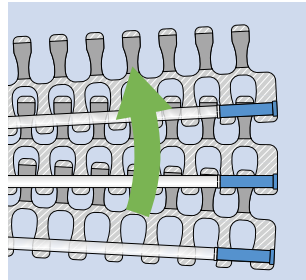


S18-44 GRT CCW 2.2



For Series 11 there is a unique color coding for the caps. The position of the pin head is marked by blue side caps/Hold Down caps (the opposite side is marked in white).

When fitting the belt it is important to remember this code – blue always on the outside (of the last curve).




For high speed applications the caps and Hold Down caps are made in a special robust resistant material (HW material). These can be identified by a darker shade, so that the outside in HW will be dark blue and the inside will be light grey.

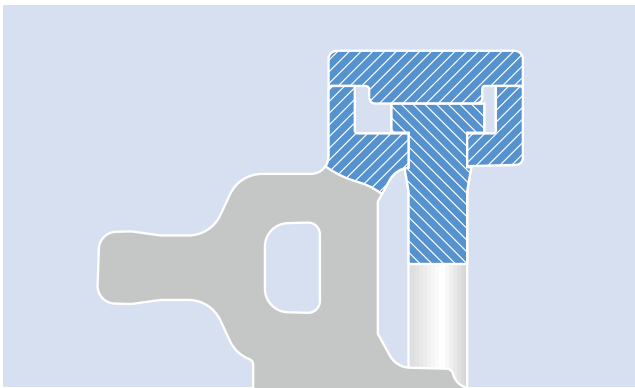

Series 11 pinhead with cap

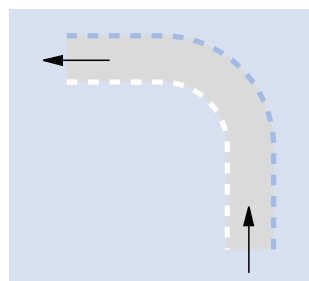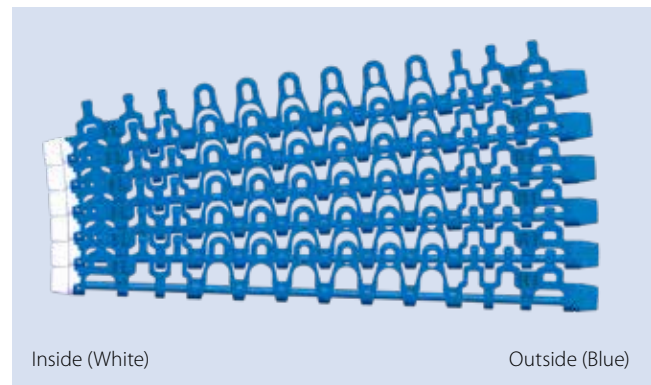

Belt with POM caps, blue outside, white inside

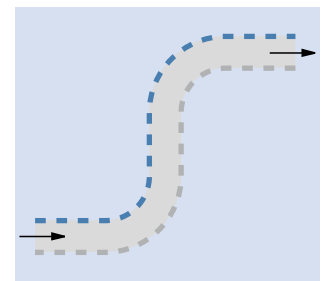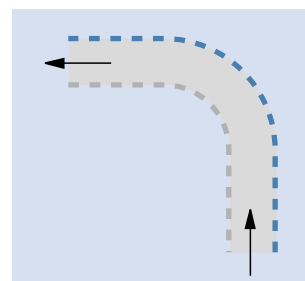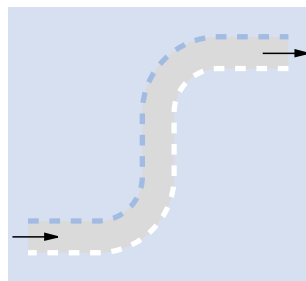

Belt with HW caps, dark blue on the outside, light grey on the inside



# 3.3 CONVEYOR LAYOUTS

## Belt nomenclature and ordering guidelines Series 11

When ordering it's important to consider the conveyor layout as the belt is built to fit. The pattern will depend on the direction of the last curve:

- If the last curve turns right, a clockwise belt needs to be ordered for the curve.
- If the last curve turns left, a counter-clockwise belt needs to be ordered for the curve.

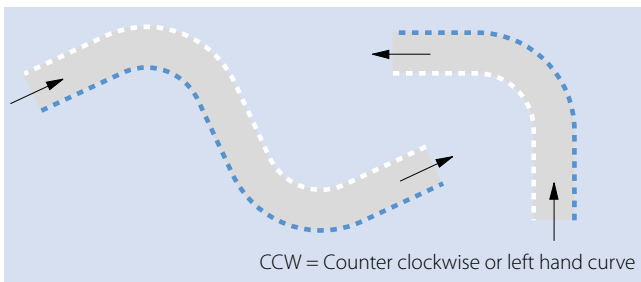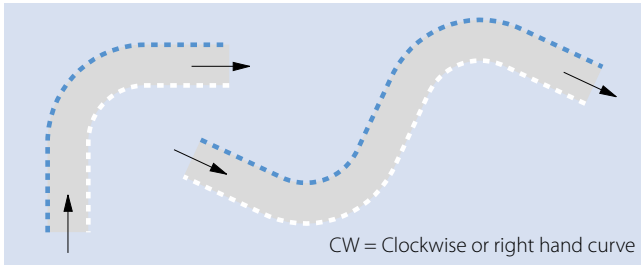


A CW or a CCW code in the belt description indicates whether the belt is to be used for a left hand or right hand curve.



## Series 11 with caps

Sketch			
Belt designations	<div>  S11-45 GRT CW POM-CR BL (POM BL/WT)         </div> <div>  S11-45 GRT CCW POM-CR BL (POM WT/BL)         </div>		
Description	CW = Clockwise (= Pin head is located on left-hand side/outer radius on the last curve) CCW = Counter clockwise (= Pin head is located on right-hand side/outer radius on the last curve) POM-CR = All side modules (blue) in POM-CR, center modules (white) in POM with flat cover caps on both sides (POM BL/WT) = Caps in POM BL on the left hand side and POM WT on the right hand side		
Components	S11 CAP POM BL (or WT for CCW) S11-45 GRT SML POM-CR BL W172 S11-45 GRT SML POM-CR BL W122	S5/S11-45 GRT CM POM BL W100 S4.1/S8/S11 PIN PBT BL D5	S11 CAP POM WT (or BL for CCW) S11-45 GRT SMR POM-CR BL W122 S11-45 GRT SMR POM-CR BL W172
Belt width	Minimum belt width: 175 mm (6.89 in) Width increment: 25 mm (0.98 in)		
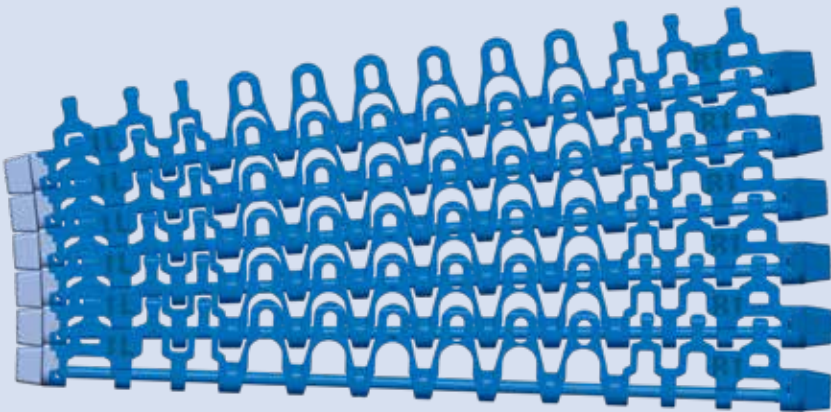
## Series 11 with Hold Down caps in HW

Sketch			
Belt designations	<div>  <b>S11-45 GRT CW HD POM-CR BL (HW DB/LG)</b> </div> <div>  <b>S11-45 GRT CCW HD POM-CR BL (HW LG/DB)</b> </div>		
Description	<div>CW = Clockwise (= Pin head is located on left-hand side/outer radius on the last curve)</div> <div>CCW = Counter clockwise (= Pin head is located on right-hand side/outer radius on the last curve)</div> <div>HD = Hold Down cap on both sides</div> <div>POM-CR = All side modules (blue) in POM-CR, center modules (white) in POM</div> <div>(HW DB/LG) = Hold Down caps in HW DB on the left hand side and HW LG on the right hand side</div>		
Components	<div>S11 CAP HDL HW DB (LG for CCW)      S5/S11-45 GRT CM POM BL W100      S11 CAP HDR HW LG (DB for CCW)</div> <div>S11-45 GRT SML POM-CR BL W172      S4.1/S8/S11 PIN PBT BL D5      S11-45 GRT SMR POM-CR BL W122</div> <div>S11-45 GRT SML POM-CR BL W122           S11-45 GRT SMR POM-CR BL W172</div>		
Belt width	<div>Minimum belt width: 175 mm (6.89 in)</div> <div>Width increment: 25 mm (0.98 in)</div> <div>Belt width excludes the extending caps of each 10 mm (0.39 in), overall belt width is width (Wxxx) + 20 mm (0.79 in).</div>		




# 3.3 CONVEYOR LAYOUTS

## Belt nomenclature and ordering guidelines for combo belts

S11 and S5 ST can be combined. Combos will always have pins in stainless steel (SS). A combo can ensure the strength of the S5 ST combined with the narrow radius of S11.

## Conveyor layout options for combo belts

Combo belts combining the tight radius feature of S11 with the high strength of S5 ST will normally only be used for uni-directional layouts (L, U and C) as the curve factor will depend on the direction of the turn.

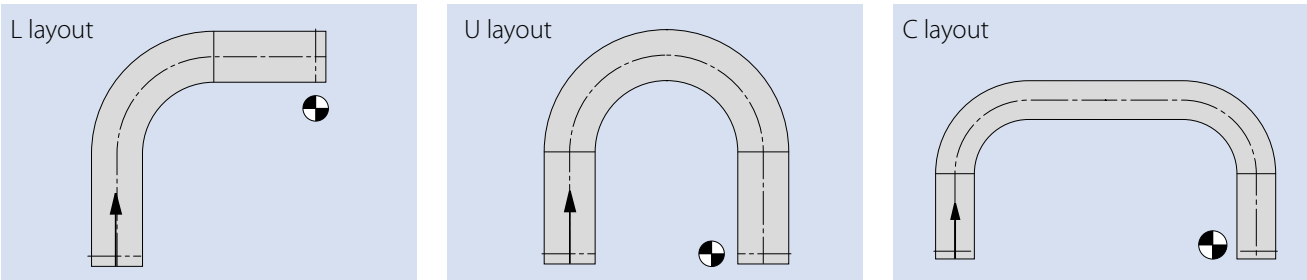

## S5 ST/S11 combo (clockwise)



Sketch			
Belt designation	S5 ST/S11-45 GRT CW POM-CR BL (POM WT)		
Description	<p>CW = Clockwise (= SS pin with groove locked in the S5 ST module with clips on left-hand side)  With flat cover caps on right hand side (inside radius on last curve) (in POM WT)</p> <p>POM-CR = All side modules (blue) in POM-CR, center modules (blue) in POM</p> <p>First listed name will be the left-hand side belt type (seen from above in travel direction)</p>		
Components	S5 CLP ST POM WT S5-45 GRT SML ST POM-CR DB W100 S5-45 GRT SML ST POM-CR DB W75	S5/S11-45 GRT CM POM BL W100 S5/S11-45 GRT CM POM BL W25 S5/S11 PIN ST SS D5	S11 CAP POM WT S11-45 GRT SMR POM-CR BL W122 S11-45 GRT SMR POM-CR BL W172
Belt width	Minimum belt width: 175 mm (6.89 in) Width increment: 25 mm (0.98 in)		



For combo belts the text description shows how the belt is combined:

- S5 ST/S11 = S5 ST on the left hand side and S11 on the right hand side = a clockwise belt
- S11/S5 ST = S11 on the left hand side and S5 ST on the right hand = a counter-clockwise belt

#### S11/S5 ST combo (counter-clockwise)
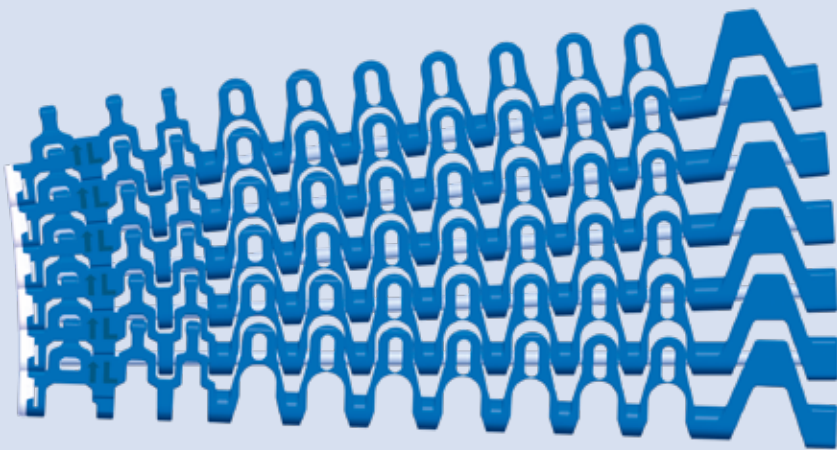
<b>Sketch</b>			
<b>Belt designations</b>	 <b>S11/S5 ST-45 GRT CCW POM-CR BL (POM WT)</b>		
<b>Description</b>	<p>CCW = Counter clockwise (= SS pin with groove locked in the S5 ST module with clips on right-hand side)          With flat cover caps on left hand side (inside radius on last curve) (in POM WT)</p> <p>POM-CR = All side modules (blue) in POM-CR, center modules (blue) in POM</p> <p>First listed name will be the left-hand side belt type (seen from above in travel direction)</p>		
<b>Components</b>	S11 CAP POM WT S11-45 GRT SML POM-CR BL W122 S11-45 GRT SML POM-CR BL W172	S5/S11-45 GRT CM POM BL W100 S5/S11-45 GRT CM POM BL W25 S5/S11 PIN ST SS D5	S5 CLP ST POM WT S5-45 GRT SMR ST POM-CR DB W100 S5-45 GRT SMR ST POM-CR DB W75
<b>Belt width</b>	Minimum belt width: 175 mm (6.89 in) Width increment: 25 mm (0.98 in)		

## 3.3 CONVEYOR LAYOUTS

### Minimum inner radius

The side-flexing radius  $r_1$  has to be equal or above the minimum inner radius, which depends on the series and belt width. The minimum inner radius is calculated with the collapse factor  $C_c$ . If the radius is significantly higher than the minimum radius, belt clattering on inside side modules may occur.

$$r_{1\min} = W_B \cdot C_c$$

with:

$r_{1\min}$  = inner radius

$W_B$  = belt width

$C_c$  = collapse factor

Series	Belt width		Factor $C_c$
	[mm]	[in]	
Series 5, Series 5 G, Series 5 ST, Series 5 BT	100* – 199	3.94* – 7.86	1.8
	200 – 299	7.87 – 11.80	1.9
	≥ 300	≥ 11.81	2.0
Series 5 RG	125 – 199	4.92 – 7.86	1.6
	200 – 299	7.87 – 11.80	1.7
	300 – 399	11.81 – 15.74	1.8
	400 – 499	15.75 – 19.68	1.9
	≥ 500	≥ 19.69	2.0
Combo S5 ST/S11	all	all	1.45
	≥ 1000	≥ 39.37	1.55
Series 9	all	all	1.8**
Series 9.1	all	all	1.3 (-2.9)***
Series 11	all	all	1.4
Series 18 2.2, Series 18 2.2 G, Series 18 HDK, Series 18 FRT1	≤ 607	≤ 23.88	2.1
	> 607	> 23.88	2.2
Series 18 1.7	≤ 797	≤ 31.38	1.7
	> 797	> 31.38	1.8

\* 175 mm (6.89 in) for S5 ST

\*\* Special options available

See chapter 3.3 paragraph spiral conveyors

\*\*\* Special options available

See chapter 3.3 Module layout with specified inner radii (series 9.1)

### F2 – F8 side modules (Series 9)

In spiral applications, drum radius and minimum radius of the belt should be aligned. the drum radius however may never be smaller than the belt radius – but should not be significantly larger than the minimum radius of the belt. A drum radius that is too high leaves space for the inside side modules to move, causing an unstable belt run and possibly product movement.

If you want to exceed the minimum radius we provide special F-side modules which reduce the space on the inside curve at higher radii.

$$p_{\text{inside}} = \frac{r_{\text{drum}}}{r_{\text{drum}} + W_B} \cdot p$$

$$C_c = \frac{r_{\text{drum}}}{W_B}$$

with:


$p$  = pitch

$p_{\text{inside}}$  = inside pitch

$r_{\text{drum}}$  = radius of spiral drum

$W_B$  = belt width

$C_c$  = collapse factor

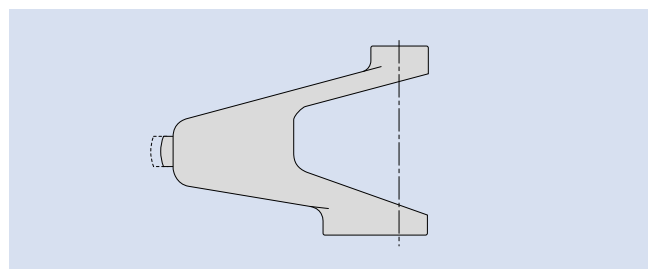

Module	$p_{\text{inside}}$	$C_c$
F2	34.05	2.12
F3	35.30	2.40
F4	36.30	2.65
F5	37.85	3.10
F6	39.35	3.68
F7	41.05	4.58
F8	42.35	5.50

# Module layout with specified inner radii (series 9.1)

## Series 9.1-57 GRT

By combining S9.1-57 GRT SMT on the outer radius and SMU modules on the inner radius, the belt's collapse factor is adjustable over a wide range. The greater the number of SMU modules on the inner radius, the lower the collapse factor and therefore the possible inner radius of the belt.

The following formula is used to calculate the smallest possible collapse factor for a specific inner radius:

$$C_c = \frac{r_{\text{Drum}}}{W_B}$$

$r_{\text{Drum}}$  = cage radius  
 $W_B$  = belt width  
 $C_c$  = collapse factor

### Example:

Cage radius ( $r_{\text{drum}}$ ) = 2080 mm, belt width ( $W_B$ ) = 850 mm


$$C_c = \frac{2080}{850} = 2.447$$

Cage radius ( $r_{\text{drum}}$ ) = 81.89 in, belt width ( $W_B$ ) = 33.46 in

$$C_c = \frac{81.89}{33.46} = 2.447$$

The next smaller value from the diagram below should be selected as the belt's collapse factor, i.e. 2.4.  
The appropriate line on the diagram shows the module order required on the inner radius.

S9.1 Collapse factor	Belt edge structure on the inner radius (row #)										% on the inner	
	1	2	3	4	5	6	7	8	9	10	% SMU	% SMT
1.3											0	100
1.4											10	90
1.5											20	80
1.6											25	75
1.7											33.33	66.67
1.8											40	60
1.9											50	50
2.1											60	40
2.2											66.66	33.34
2.4											75	25
2.5											80	20
2.7											90	10
2.9											100	0

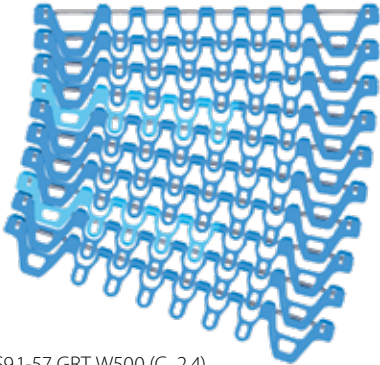

S9.1-57 GRT W500 ( $C_c$  2.4)

- S9.1 SMT (Side Module Tight)
- S9.1 SMU (Side Module Universal)

## 3.3 CONVEYOR LAYOUTS


### Spiral conveyors

Spiral conveyors are a special variant of side-flexing belts as they consist of basically one curve. Spirals are always ascending or descending along a rotating drum. One complete revolution around the drum is called a “tier”. Spirals can have up to 20 and more tiers. Please note that the collapse factors and minimum inner radius apply for spiral applications. Our side-flexing belt (S5, S5/S11 Combo, S9, S9.1, S18) can be used in spirals.

**If you are planning a spiral conveyor please contact customer service and send us the completed spiral checklist (see chapter 6.6 Questionnaires).**

The main drive system is the driven inner cage, which consists of vertical bars. The curved belt is supported on the inner radius by the cage and is moved by traction between the belt and the cage. The direction of rotation of the cage determines whether the conveying is inclined or declined. The drive and tensioning unit depicted in the sketch provides the necessary belt tension. The speed of the motor must be coordinated with the speed of the cage drive.


It should be possible to move the tensioning unit a distance corresponding to approx. 1 % of the belt length. The belt can be supported by wearstrips as described in chapter 3.2.

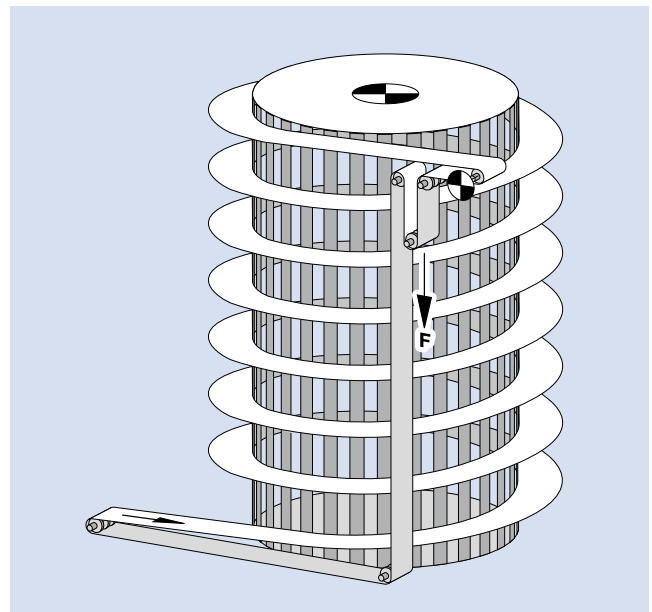


#### Belt travel direction (spiral applications)

For spiral application also the running direction of the belt should be considered.


The contact to the wear stripes will be at the drum – inside curve. But the drum will rotate faster than the belt. A belt travel direction with leg upfront is required.

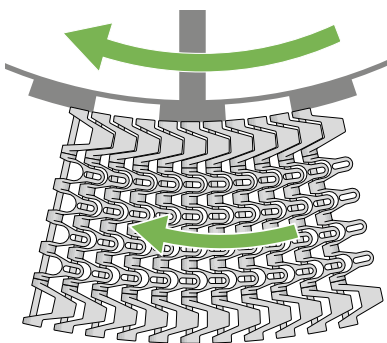

S5-45 GRT



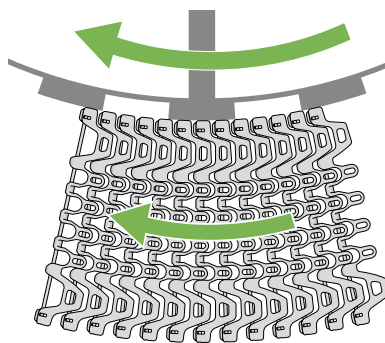


S9.1

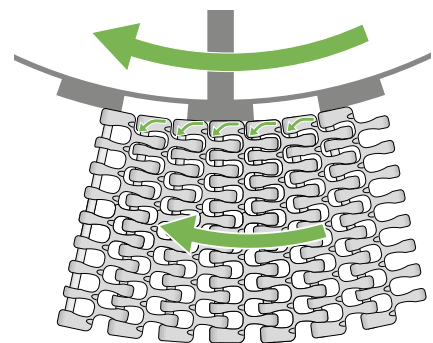


S18-44 GRT CCW

If curve belts with recommended travel direction like CW or CCW are used for a spiral application, please also consider the faster rotation of the drum. This means you have to use a CW belt for a CCW spiral and vis versa.

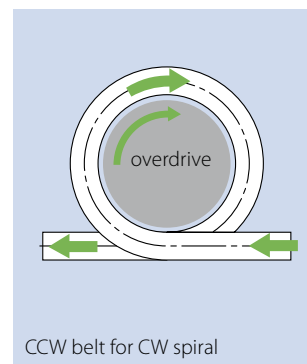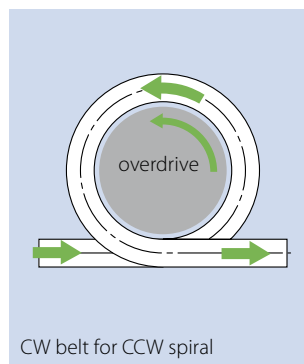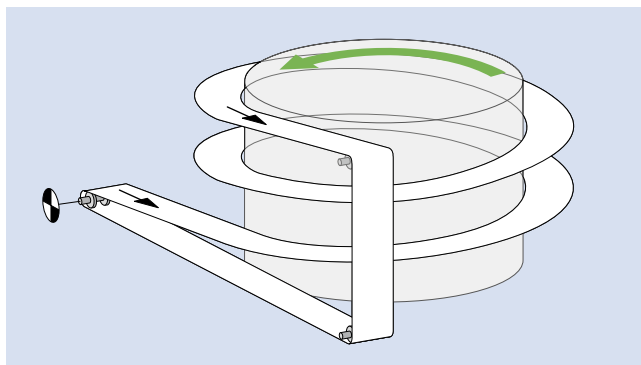


#### Preferred travel direction

Cage drive spiral CCW

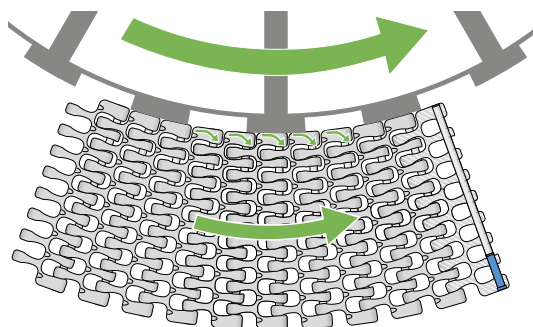

S18-44 GRT CW 2.2


Cage drive spiral CW

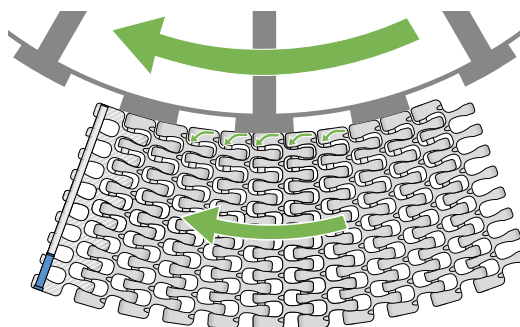

S18-44 GRT CCW 2.2

#### Layout options


Some possible layout options.

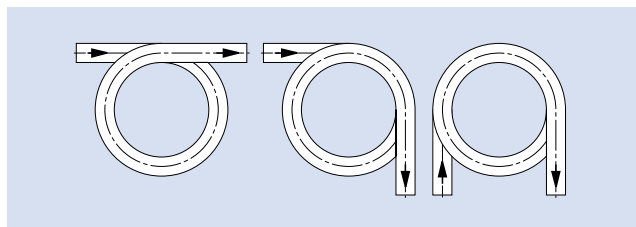

## 3.3 CONVEYOR LAYOUTS

### High Tension spiral/elevator


To join two production units with different heights, high tension spiral (without cage)/elevators can be used. This type of design (without driven inner cage) should not have more than 2 – 3 tiers. With S5 BT side modules, 4 – 5 tiers are possible.

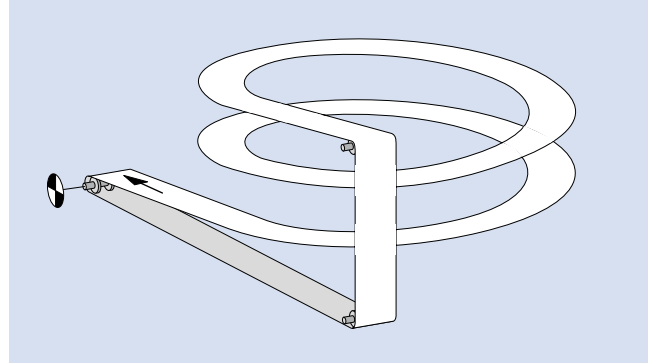


### Bearing tab (Series 5)

For high tension spiral (elevator) with not more than 5 tiers, instead of a rotating drum special bearing tab modules can be used.

The mounted roller bearings on the side modules run on a rigid drum. Friction forces are thereby reduced significantly.

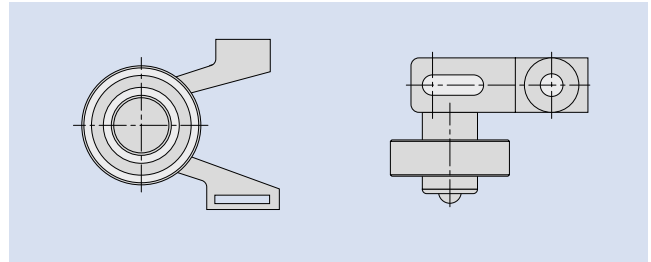



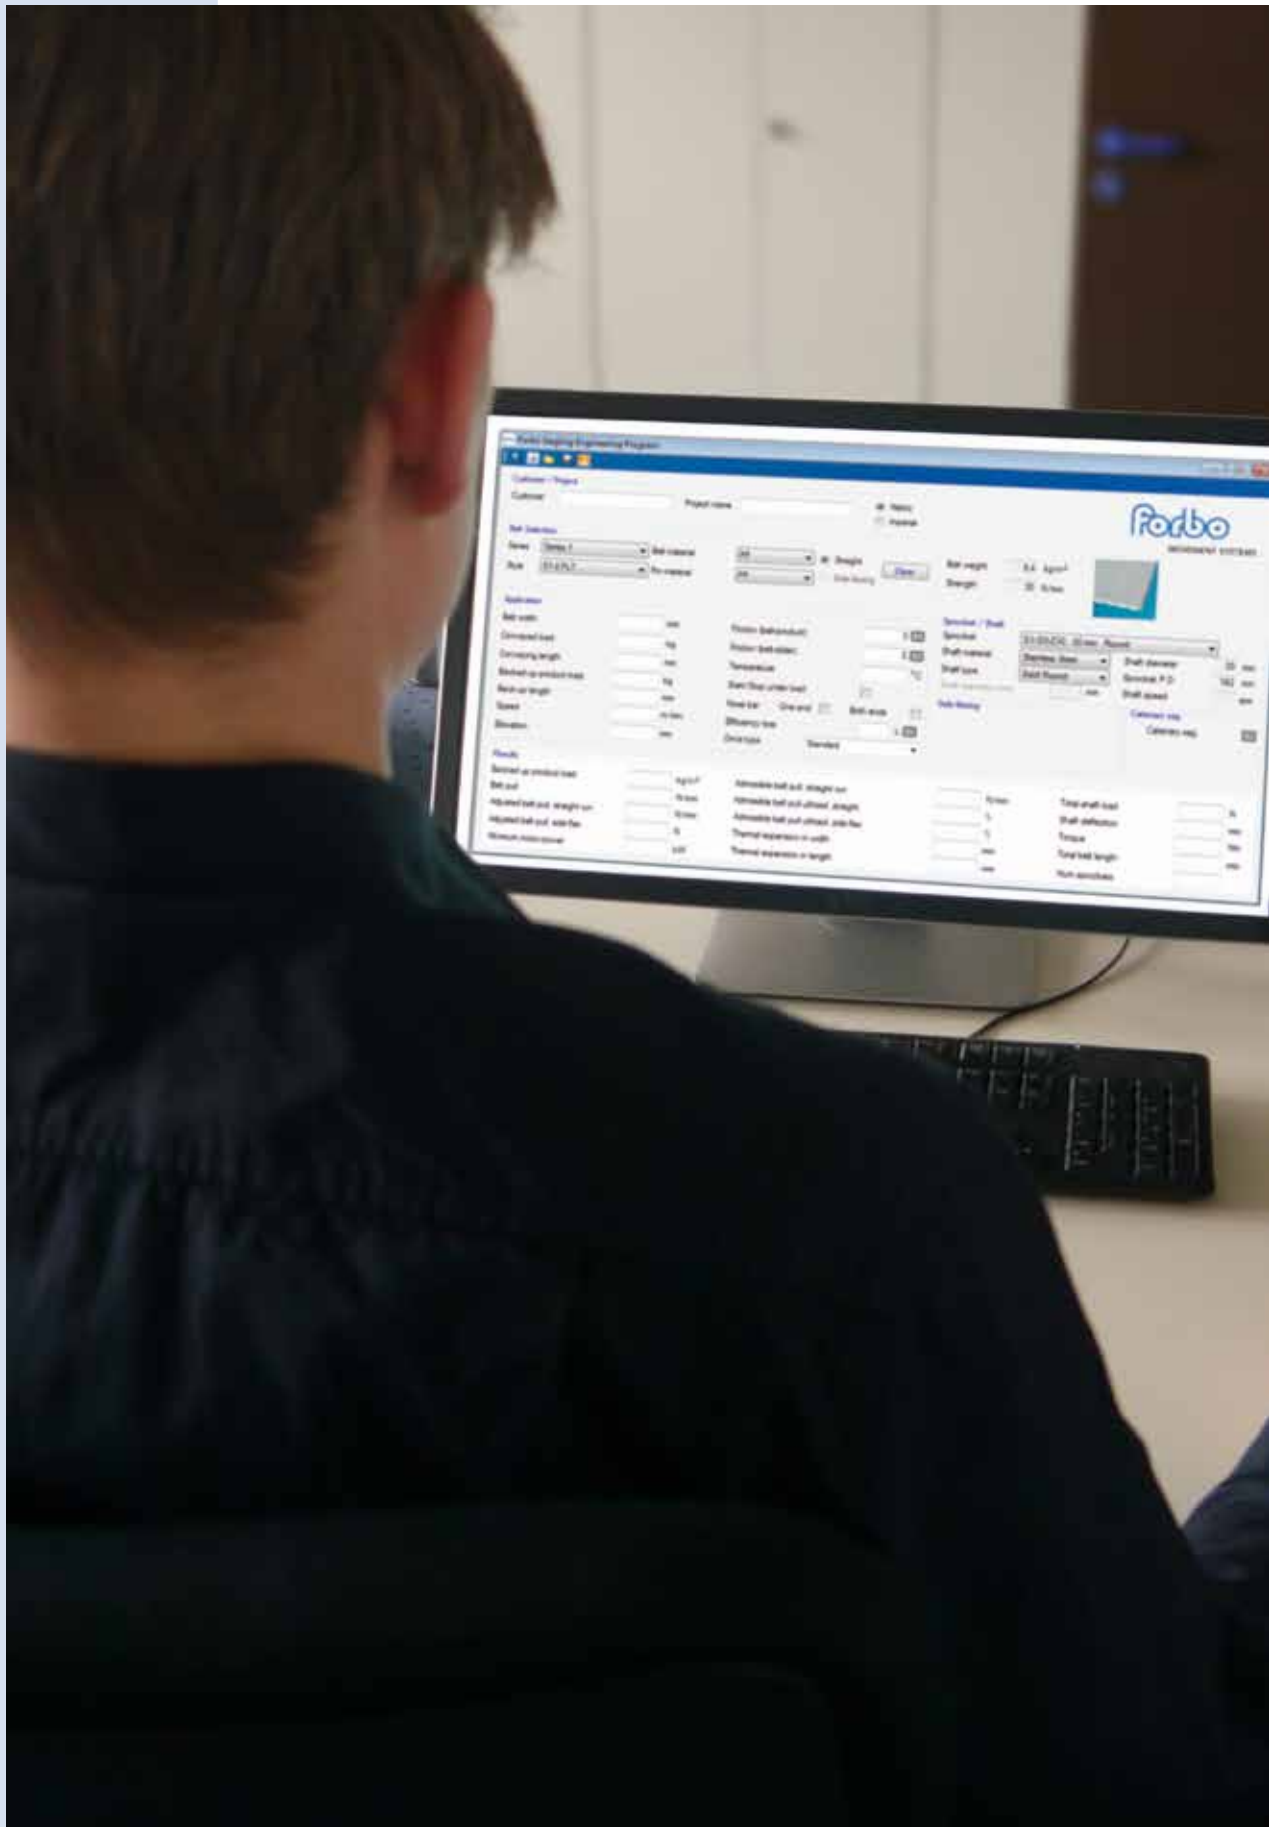



# 4 CALCULATIONS

- 4.1 Four step method
- 4.2 Calculation example
- 4.3 Shaft calculations
- 4.4 Temperature influence on belt dimensions

# 4.1 FOUR STEP METHOD


The following four steps will guide you through your belt design process. The symbols used are as follows:

	Designation	Symbols	Metric	Imperial
Forces	Effective belt pull	$F_U$	N	lb
	Adjusted belt pull	$F_{adj}$	N	lb
	Adjusted belt pull per mm/in belt width	$F'_{adj}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
	Admissible belt pull per mm/in belt width	$F'_{adm}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
	Nominal belt pull capacity per mm/in belt width	$F'_{nom}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
Factors & coefficients	Coefficient of friction belt to accumulated products	$\mu_{acc}$	–	–
	Coefficient of friction belt to slider	$\mu_s$	–	–
	Operational factor	$C_{Op}$	–	–
	Temperature factor	$C_T$	–	–
	Conversion factor	g	9,81	1
Conveyor dimensions	Conveyor length/Center to center distance	$l_{c-c}$	m	ft
	Elevation of conveyor	$h_e$	mm	in
	Angle of incline/decline	$\alpha_i$		
	Mass of conveyed product	$m_p$	kg	slug
	Mass of entire belt in conveyor	$m_B$	kg	slug
	Belt width	$W_B$	mm	in

A complete list of all the symbols used in this Engineering Manual can be found in the appendix in chapter 6.2.

# A


## Calculate effective belt pull $F_U$

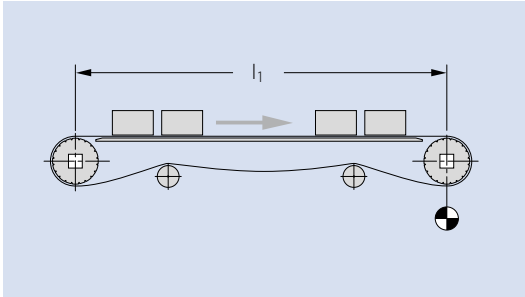

### Straight running

$$F_U = \mu_s \cdot g \cdot (m_p + m_B)$$

[N, lb]

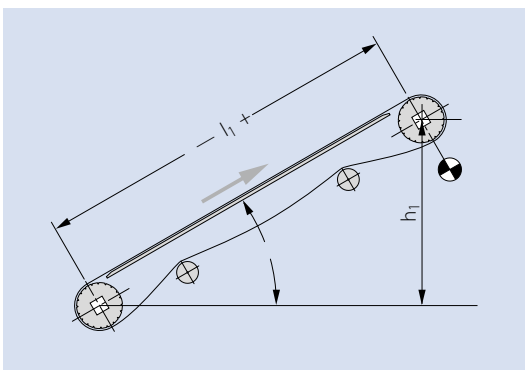


### Inclining

$$F_U = \mu_s \cdot g \cdot (m_p + m_B) \pm g \cdot m_p \cdot \sin \alpha$$

[N, lb]

(+ = inclined)

(- = declined)

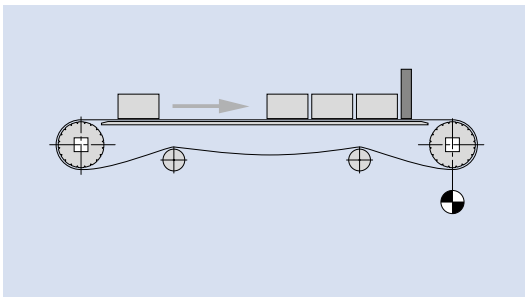

### Straight running with accumulation

$$F_U = \mu_s \cdot g \cdot (m_p + m_B) + \mu_{acc} \cdot g \cdot m_p$$

[N, lb]

**Note:** For side-flexing belts the belt tension within the curve is concentrated in the outer module only. Furthermore it has to be taken into account that the additional radial forces directed to the inside of the curve lead to higher friction loss.

$$F_{U_{radius}} = F_U$$

For  $\mu_s$  and  $\mu_{acc}$  see table friction factors 2.1.

## 4.1 FOUR STEP METHOD

### B

#### Calculate adjusted belt pull $F_{adj}$

The measurable belt pull is higher if the optimal operating conditions cannot be obtained.

To take the operating conditions into account, the effective belt pull  $F_u$  is adjusted by the operational factor  $C_{Op}$

$$F_{adj} = F_u \cdot C_{Op} \quad [N, lb]$$

with:

#### Operational factor $C_{Op}$

	$C_{Op}$
Smooth operating conditions (smooth start)	+ 0
Start-stop operation (start when loaded)	+ 0.2
Belt speed greater than 30 m/min (100 ft/min)	+ 0.2
Nose bar at one end	+ 0.4
Nose bar both ends	+ 0.8
Swan-neck inclined conveyor	+ 0.4
<b>Choose from drive configuration:</b>	
Standard	+ 0
Belt center drive (bi-directional)	+ 0.2
Lower head drive	+ 0.1
Tail drive (push configuration)	+ 0.4
$1 + \sum C_1$	

Then calculate the adjusted belt pull per millimeter of belt width:

$$F'_{adj} = \frac{F_{adj}}{W_B} \quad [N/mm, lb/ft]$$

## C

## Calculate admissible belt pull $F_{adm}$

Temperature can reduce the maximum belt pull capacity. To take this effect into account the admissible belt pull  $F'_{adm}$  is calculated with temperature factor

$$F'_{adm} = F'_{nom} \cdot C_T \quad [\text{N/mm, lb/ft}]$$

with:

### Temperature factor $C_T$

The tensile strength of the different materials increases at temperatures below 20 °C but at the same time other mechanical properties are reduced at low temperatures. Therefore the  $C_T$  factor is set to 1.0 at temperatures below 20 °C.

The temperatures relate to the actual belt temperature. Depending on the application and conveyor layout the temperature of the conveyed product may be different.

Celsius [°C] from	Fahrenheit [°F] from	Belt material					
		PE	PP	POM	PA	PA HT	TPC1
-60	-76	1.0	–	–	–	–	–
-40	-40	1.0	–	1.0	–	–	–
-20	-4	1.0	–	1.0	1.0	1.0	1.0
0	32	1.0	1.0*	1.0	1.0	1.0	1.0
+20	68	1.0	1.0	1.0	1.0	1.0	1.0
+40	104	0.90	1.0	1.0	1.0	1.0	0.87
+60	140	0.62	0.85	0.96	0.95	1.0	0.75
+80	176	–	0.65	0.75	0.72	1.0	0.67
+100	212	–	0.45	–	0.50	1.0	–
+120	248	–	–	–	0.40	0.9	–
+140	284	–	–	–	–	0.8	–
+155	311	–	–	–	–	0.7	–

\* below +10 °C avoid impact on belt and ensure smooth start; below +5 °C PP is not recommended

## D

## Validation of belt selection

Criteria for determining belt selection:

$$F'_{adj} < F'_{adm}$$

If this criteria is not fulfilled, change the material or belt series with a higher  $F'_{nom}$  value and repeat from Step A.

To calculate the utilization of belt strength use

$$\frac{F'_{adj}}{F'_{adm}} = \text{utilization} \quad [\%]$$

## 4.2 CALCULATION EXAMPLE

The example on the following pages shall illustrate the four step method.

The example on the left uses **metric** units. The example on the right uses **imperial** units

An easier and faster way of doing these calculations is to use our Siegling Prolink Calculation Program which you can download at [www.forbo.com/movement](http://www.forbo.com/movement) > E-Tools.



<b>Conveyor length</b>	$l_{c-c} =$	<b>4 m</b>	<b>13.12 ft</b>
<b>Straight, no incline</b>			
<b>Belt width</b>	$W_B =$	<b>1000 mm</b>	<b>3.28 ft</b>
<b>Product load per meter belt length</b>	$m_p =$	<b>700 kg/m</b>	<b>470 lb/ft</b>
<b>Start-stop operation, normal conditions</b>			
<b>Belt support material: hardwood</b>			
<b>Belt speed</b>	$v =$	<b>10 m/min</b>	<b>32.81 ft/min</b>

Calculate total product load:

$$m_p = 700 \text{ kg/m} \cdot 4 \text{ m} = 2800 \text{ kg}$$

$$m_p = 470 \text{ lb/ft} \cdot 13.12 \text{ ft} = 6172 \text{ lb}$$

Choose series: S8-FLT POM

Belt weight according to data sheet:  $m'_B = 11 \text{ kg/m}^2$

Belt weight according to data sheet:  $m'_B = 2.3 \text{ lb/ft}^2$

Calculate total belt weight:

$$m_B = 11 \text{ kg/m}^2 \cdot 8 \text{ m} \cdot 1 \text{ m} = 88 \text{ kg}$$

$$m_B = 2.3 \text{ lb/ft}^2 \cdot 26.24 \text{ ft} \cdot 3.28 \text{ ft} = 194 \text{ lb}$$

### Step A

Material pair hardwood.

POM under dry, regular conditions:  $\mu_s = 0.22$

S8 FLT POM:  $F'_{nom} = 40 \text{ N/mm}$

Material pair hardwood.

POM under dry, regular conditions:  $\mu_s = 0.22$

S8 FLT POM:  $F'_{nom} = 2740 \text{ lb/ft}$

Calculate effective belt pull:

$$F_U = 0.22 \cdot 9.81 \cdot (2800 \text{ kg} + 88 \text{ kg}) = 6232.88 \text{ N}$$

$$F_U = 0.22 \cdot 1 \cdot (6172 \text{ lb} + 194 \text{ lb}) = 1400.52 \text{ lb}$$

### Step B

Start-stop and normal operating conditions:  $C_{Op} = 1.2$

Start-stop and normal operating conditions:  $C_{Op} = 1.2$

Calculate adjusted belt pull:

$$F_{adj} = 1.2 \cdot 6232.88 \text{ N} = 7479.46 \text{ N}$$

$$F_{adj} = 1.2 \cdot 1400.52 \text{ lb} = 1680.62 \text{ lb}$$

$$F'_{adj} = \frac{7479.46 \text{ N}}{1000 \text{ mm}} = 7.48 \text{ N/mm}$$

$$F'_{adj} = \frac{1680.62 \text{ lb}}{3.28 \text{ ft}} = 512.38 \text{ lb/ft}$$

## 4.2 CALCULATION EXAMPLE

### Step C

Operating temperature 65 °C:  $C_T = 0.96$

Calculate admissible belt pull:

$$F'_{adm} = 40 \text{ N/mm} \cdot 0.96 = 38.4 \text{ N/mm}$$

Operating temperature 65 °C:  $C_T = 0.96$

$$F'_{adm} = 2740 \text{ lb/ft} \cdot 0.96 = 2630.4 \text{ lb/ft}$$

### Step D

Validate belt selection:

$$F'_{adj} = 7.48 \text{ N/mm} < 38.4 \text{ N/mm} = F'_{adm}$$

Utilization:

$$7.48 : 38.4 = 19.5\%$$

$$F'_{adj} = 512.38 \text{ lb/ft} < 2630.4 \text{ lb/ft} = F'_{adm}$$

$$512.38 : 2630.4 = 19.5\%$$

**The belt selection is fine. If you calculate a utilization of > 80 % you need to increase admissible belt pull by changing the material or series selection. Then restart the four step method.**



## 4.3 SHAFT CALCULATIONS

### Shaft load $F_s$

$$F_s = \sqrt{F_{adj}^2 + (m_s \cdot g)^2}$$

with:

$F_s$  = shaft load [N, lb]

$F_{adj}$  = adjusted belt pull [N, lb]

$m_s$  = mass of shaft [kg, lb]

$g$  = force conversion factor [9.81 m/s<sup>2</sup>, 1]

#### Example:

$$F_{adj} = 7479.46 \text{ N}$$

1 m x 60 mm square steel shaft:  $m_s = 28.26 \text{ kg}$

$$F_s = \sqrt{(7479.46 \text{ N})^2 + (28.26 \text{ kg} \cdot 9.81 \text{ m/s}^2)^2} = 7484.6 \text{ N}$$

$$F_{adj} = 1680.62 \text{ lb}$$

1 m x 60 mm square steel shaft:  $m_s = 18.99 \text{ lb}$

$$F_s = \sqrt{(1680.62 \text{ lb})^2 + (18.99 \text{ lb} \cdot 1)^2} = 1680.73 \text{ lb}$$

### Shaft torque

$$M = \frac{F_{adj} \cdot D_0}{2000}$$

with:

$M$  = torque [Nm, ftlb]

$F_{adj}$  = adjusted belt pull [N, lb]

$D_0$  = pitch diameter of sprocket [mm, in]

#### Example:

$$F_{adj} = 7479.46 \text{ N}$$

Sprocket S8 Z15:  $D_0 = 124 \text{ mm}$

$$M = \frac{7479.46 \text{ N} \cdot 124 \text{ mm}}{2000} = 463.73 \text{ Nm}$$

$$F_{adj} = 1680.62 \text{ lb}$$

Sprocket S8 Z15:  $D_0 = 0.41 \text{ ft}$

$$M = \frac{1680.62 \text{ lb} \cdot 0.41 \text{ ft}}{2000} = 341.73 \text{ lbft}$$

## 4.3 SHAFT CALCULATIONS

### Shaft deflection

The deflection can be calculated using the following formulas:

$$y_s = \frac{5 \cdot F_s \cdot l_b^3}{384 \cdot E \cdot I} \quad [\text{mm, in}]$$

with:

$y_s$  = shaft deflection [mm, in]

$F_s$  = shaft load [N, lb]

$l_b$  = bearing center distance [mm, in]

$E$  = modulus of elasticity [MPa, psi]

$I$  = area moment of inertia [mm<sup>4</sup>, in<sup>4</sup>]

$W_s$  = edge length of square shaft [mm, in]

$d_s, d_{in}, d_{out}$  = diameter of shaft [mm, in]

$t_s$  = wall thickness of shaft [mm, in]

Material	E in [MPa = $\frac{\text{N}}{\text{mm}^2}$ ]	E in [10 <sup>6</sup> psi]
Steel	200000	29.01
Stainless steel	180000	26.11
Aluminum	70000	10.15

Shaft type	I
Round	$\frac{\pi \cdot d_s^4}{64}$
Hollow round	$\pi \cdot \frac{d_{out}^4 - d_{in}^4}{64}$
Square	$\frac{W_s^4}{12}$
Hollow square	$\frac{W_s^4 - (W_s - 2 \cdot t_s)^4}{12}$

#### Example:

$$F_s = 7484.6 \text{ N}$$

$$l_b = 1200 \text{ mm}$$

$$E = \text{for Steel: } 200000 \text{ MPa}$$

Calculate area moment of inertia  $I$  for square shaft with edge length  $W_s = 60 \text{ mm}$ :

$$I = \frac{(60 \text{ mm})^4}{12} = 1080000 \text{ mm}^4$$

Calculate  $y_s$ :

$$y_s = \frac{5 \cdot 7484.6 \text{ N} \cdot (1200 \text{ mm})^3}{384 \cdot 200000 \text{ N/mm}^2 \cdot 1080000 \text{ mm}^4} = 0.78 \text{ mm}$$

$$F_s = 1680.73 \text{ lb}$$

$$l_b = 47.24 \text{ in}$$

$$E = \text{for Steel: } 29.01 \cdot 10^6 \text{ psi}$$

Calculate area moment of inertia  $I$  for square shaft with edge length  $W_s = 2.36 \text{ in}$ :

$$I = \frac{(2.36 \text{ in})^4}{12} = 2.59 \text{ in}^4$$

Calculate  $y_s$ :

$$y_s = \frac{5 \cdot 1680.73 \text{ lb} \cdot (47.24 \text{ in})^3}{384 \cdot 29007547 \text{ psi} \cdot 2.59 \text{ in}^4} = 0.031 \text{ in}$$

## Shaft torsion

$$\varphi = \frac{90 \cdot F_{\text{adj}} \cdot D_0 \cdot l_s}{\pi \cdot G \cdot I_T}$$

with:

$\varphi$  = torsion angle in drive shaft [°]

$F_{\text{adj}}$  = adjusted belt pull [N, lb]


$D_0$  = pitch diameter [mm, in]

$l_s$  = shaft length [mm, in]

$G$  = modulus in shear strength [MPa, psi]

$I_T$  = torsional inertial force [mm<sup>4</sup>, in<sup>4</sup>]

For proper engagement we recommend not exceeding  $\varphi$  by 0.5‰ of shaft length  $l_s$  in mm.

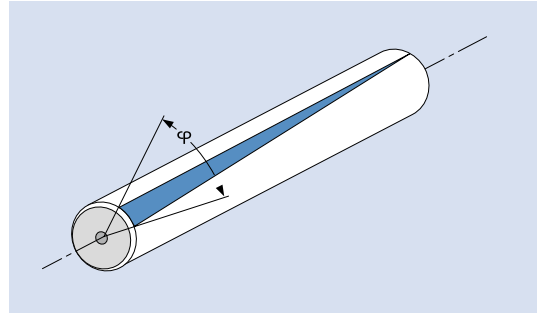

Material	G in [MPa = $\frac{N}{mm^2}$ ]	G in [10 <sup>6</sup> psi]
Carbon steel	80000	11.6
Stainless steel	75000	10.88
Aluminum	27000	3.92

Shaft type	$I_T$ [mm <sup>4</sup> ]
Round	$\pi \cdot \frac{d_s^4}{32}$
Hollow round	$\pi \cdot \frac{d_{\text{out}}^4 - d_{\text{in}}^4}{32}$
Square	$1/12 \cdot W_s^4$
Hollow square	$\frac{W_s^4 - (W_s - 2t_s)^4}{12}$

### Example:

$$F_{\text{adj}} = 7479.46 \text{ N}$$

$$\text{Sprocket S8 Z15: } D_0 = 122.7 \text{ mm}$$

$$l_s = 1300 \text{ mm}$$

$$G \text{ for carbon steel: } 80000 \text{ MPa}$$

Calculate torsional inertia force  $I_T$  for square shaft with edge length  $W_s = 60 \text{ mm}$

$$I_T = 1/12 \cdot (60 \text{ mm})^4 = 1080000 \text{ mm}^4$$

$$\varphi = \frac{90 \cdot 7479.46 \text{ N} \cdot 122.7 \text{ mm} \cdot 1300 \text{ mm}}{\pi \cdot 80000 \text{ MPa} \cdot 1080000 \text{ mm}^4} = 0.396^\circ$$

$$0.5 \text{ ‰ of } 1300 \text{ mm} = 0.65 > 0.396 = \varphi$$

$$F_{\text{adj}} = 1680.62 \text{ lb}$$

$$\text{Sprocket S8 Z15: } D_0 = 4.83 \text{ in}$$

$$l_s = 51.18 \text{ in}$$

$$G \text{ for carbon steel: } 11.6 \cdot 10^6 \text{ psi}$$

Calculate torsional inertia force  $I_T$  for square shaft with edge length  $W_s = 2.36 \text{ in}$ :

$$I_T = 1/12 \cdot (2.36 \text{ in})^4 = 2.585 \text{ in}^4$$

$$\varphi = \frac{90 \cdot 1680.62 \text{ lb} \cdot 4.83 \text{ in} \cdot 51.18 \text{ in}}{\pi \cdot 11.6 \cdot 10^6 \text{ psi} \cdot 2.585 \text{ in}^4} = 0.397^\circ$$

$$0.5 \text{ ‰ of } 1300 \text{ mm} = 0.65 > 0.397 = \varphi$$

## 4.3 SHAFT CALCULATIONS

### Power requirement at the drive drum

$$P_s = \frac{F_{adj} \cdot v}{60000}$$

with:

$P_s$  = power at drive end of shaft [kW, hp]

$F_{adj}$  = adjusted belt pull [N, lb]

$v$  = speed [m/min, ft/min]

#### Example:

$$P_s = \frac{7479.46 \text{ N} \cdot 10 \text{ m/min}}{60000} = 1.25 \text{ kW}$$

$$P_s = \frac{1680.62 \text{ lb} \cdot 32.81 \text{ ft/min}}{33000} = 341.73 \text{ hp}$$

Please note that the calculated power is the net power necessary at the drive drum and does not take efficiency losses of e.g. the motor or gearbox into account. Furthermore it is recommend to install a motor with a reasonable reserve capacity.

### Shaft revolutions

$$R_s = \frac{v \cdot 1000}{D_0 \cdot \pi}$$

$$R_s = \frac{v \cdot 12}{D_0 \cdot \pi}$$

with:

$R_s$  = shaft revolutions [1/min]

$v$  = belt speed [m/min, ft/min]

$D_0$  = pitch diameter [mm, in]

#### Example:

$$v = 10 \text{ m/min}$$

$$\text{Sprocket S8 Z15: } D_0 = 122.7 \text{ mm}$$

$$R_s = \frac{10 \text{ m/min} \cdot 1000}{122.7 \text{ mm} \cdot \pi} = 25.94 \frac{1}{\text{min}}$$

$$v = 32.81 \text{ ft/min}$$

$$\text{Sprocket S8 Z15: } D_0 = 4.83 \text{ in}$$

$$R_s = \frac{32.81 \text{ ft/min} \cdot 12}{4.83 \text{ mm} \cdot \pi} = 25.95 \frac{1}{\text{min}}$$

## 4.4 TEMPERATURE INFLUENCE ON BELT DIMENSIONS

Plastics can expand or contract significantly when temperatures fluctuate. To calculate dimension changes in width and length, the following formulas are used

$$\Delta L = L_B \cdot (T_2 - T_1) \cdot \alpha \quad [\text{mm, in}]$$

$$\Delta W = W_B \cdot (T_2 - T_1) \cdot \alpha \quad [\text{mm, in}]$$

$$\Delta L = \text{change in length} \quad [\text{mm, in}]$$

$$\Delta W = \text{change in width} \quad [\text{mm, in}]$$

+ = elongation

– = contraction

$$L_B = \text{belt length at initial temperature} \quad [\text{m, in}]$$

$$W_B = \text{belt width at initial temperature} \quad [\text{m, in}]$$

$$T_2 = \text{operating temperature} \quad [^{\circ}\text{C, } ^{\circ}\text{F}]$$

$$T_1 = \text{initial temperature (normally } 21^{\circ}\text{C}/70^{\circ}\text{F)} \quad [^{\circ}\text{C, } ^{\circ}\text{F}]$$

$$\alpha = \text{coefficient of thermal expansion (see table)} \quad [\text{mm/m } ^{\circ}\text{C, } 10^{-6} \text{ in/in } ^{\circ}\text{F}]$$

Material	$\alpha^*$ $\frac{\text{mm}}{\text{m} \cdot ^{\circ}\text{C}}$	$\alpha^*$ $\frac{10^{-6} \cdot \text{in}}{\text{in} \cdot ^{\circ}\text{F}}$
PA	0.12	66.6
PE	0.21	116.6
POM	0.12	66.6
PP	0.15	83.3
<b>Metals</b>		
CS	0.012	6.6
SS	0.017	9.4
SSS	0.016	8.9

\* Average values for the admissible temperature range

Complete list for expansion coefficient of all materials can be found on page VI-15.

$$\text{Conversion: } \frac{10^{-6} \text{ in}}{\text{in} \cdot ^{\circ}\text{F}} = 555.5 \frac{\text{mm}}{\text{m} \cdot ^{\circ}\text{C}}$$

### Example:

At an ambient temperature of 20.1 °C, the belt is used for conveying hot goods, resulting in an operating temperature of 90 °C. Belt length 30 m, belt width 1 m, belt material polypropylene.

$$\Delta L_B = 30 \text{ m} \cdot (90 - 21)^{\circ}\text{C} \cdot 0.15 \frac{\text{mm}}{\text{m} \cdot ^{\circ}\text{C}} = 310.5 \text{ mm}$$

$$\Delta W_B = 1 \text{ m} \cdot (90 - 21)^{\circ}\text{C} \cdot 0.15 \frac{\text{mm}}{\text{m} \cdot ^{\circ}\text{C}} = 10.35 \text{ mm}$$

At an ambient temperature of 70 °F, the belt is used for conveying hot goods, resulting in an operating temperature of 194 °F. Belt length 1181.1 in, belt width 39.37 in, belt material polypropylene.

$$\Delta L_B = 1181.1 \text{ in} \cdot (194 - 70)^{\circ}\text{F} \cdot 83.3 \frac{10^{-6} \text{ in}}{\text{in} \cdot ^{\circ}\text{F}} = 12.2 \text{ in}$$

$$\Delta W_B = 39.37 \text{ in} \cdot (194 - 70)^{\circ}\text{F} \cdot 83.3 \frac{10^{-6} \text{ in}}{\text{in} \cdot ^{\circ}\text{F}} = 0.41 \text{ in}$$

The increase in belt length of 315 mm is significant which means that the returnway must be able to absorb the additional belt sag. In order to accommodate the increase in width, the conveyor frame must have a wider design.

When operating at temperatures below 21 °C (70 °F), the length and width contract. Especially in freezer applications, the reduction in length and width can be significant and this must be accommodated in the conveyor design and during belt installation. The initial belt length needs to be considered in particular when belts are installed at ambient temperatures but are expected to subsequently operate below freezing point, resulting in a significantly shorter belt length.



# 5 OPERATING INSTRUCTIONS

- 5.1 Preparing for the installation
- 5.2 Sprocket installation
- 5.3 Joining belt sections – installing and removing hinge pins
- 5.4 Installing a modular belt
- 5.5 Maintenance and repair
- 5.6 Cleaning
- 5.7 Preventive maintenance and troubleshooting

# 5.1 PREPARING FOR THE INSTALLATION

## Steps prior to belt installation

- Inspect the condition and functionality of the conveyor and all relevant conveyor components, i.e. drives, drive chains or belts, shafts, sprockets, wearstrips, bearings, support shoes and rollers. Repair or replace any damaged or worn components.
- Pay particular attention to the condition of the wearstrips. Even if the wearstrips are new, make sure the surface is clean and smooth and has no particles such as sand, dust or weld splatter embedded. New wearstrips may have become dirty if work on the conveyor has taken place after the wearstrips were installed. Running a hand over the wearstrip surface will reveal embedded particles. If the surface is not smooth, the wearstrip must either be replaced or the embedded particles must be removed.
- Failure to ensure clean and smooth wearstrip surfaces prior to installing the belt may reduce the belt life significantly.
- Check wearstrip joints for alignment and smoothness. Verify correct height between wearstrips and drive and idler shafts to ensure correct sprocket engagement. If applicable, verify the distance between sprockets and snub rollers as well as the distance between returnway rollers.
- If necessary, clean the conveyor, including frame, carryway and returnway supports, shafts, support rollers and shoes and replace any damaged or worn components.
- If possible, do not unpack the belt until immediately before the installation. Unpack the belt at the installation site and avoid dragging or rolling the belt over rough or dirty floors.

## Additional inspection and checklist for radius conveyors utilizing Series 5, Series 9, Series 9.1, Series 11 and Series 18

- Using a section of the belt, ensure the belt can move freely on the wearstrips through the entire belt path on both carryway and returnway.
- Using a section of the belt, ensure the belt engages correctly with drive and idler sprockets without touching any obstructions such as transfer plates.
- Ensure the sidewall-mounted wearstrips in the curves are correctly positioned to prevent the outer edge of the belt from lifting as the belt goes through the curve(s) and is pushed against the wearstrips guiding the inside of the belt.
- After installing the entire belt, and prior to starting the drive motor, check that the belt can move freely on the wearstrips without constrictions on the carryway and the returnway.
- If possible, start the conveyor at low speed and verify that the belt is running smoothly, engages with all sprockets and that no belt lifting is occurring.




## 5.2 SPROCKET INSTALLATION

### Belt tracking

Correct belt tracking are realized by either guiding wear-strips or by one (1) of the sprockets on drive and idler shaft.


Forbo Movement Systems recommend guiding side-flexing belts using the wearstrip (see next page). For straight running belts, either tracking method can be used.

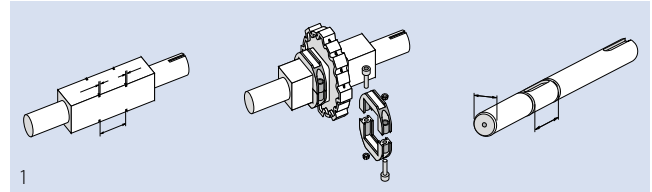

### Belt tracking by sprockets

When using sprockets for tracking the centermost sprocket must be securely locked to the shaft by retainer rings, Seeger circlip rings or similar (1).

Only lock and secure the center sprockets on the shafts. All other sprockets must be allowed to move freely on the shaft to accommodate variations in the belt width if changes in operating temperature occur (2).

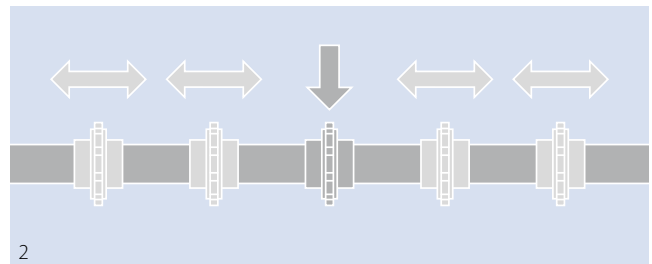


By locking the centermost sprocket equal distribution of belt width expansion and contraction is ensured.

When installing sprockets for belts with profiles and side guards, do not position sprockets directly underneath the side guards.

For the required number of sprockets please see chart in chapter 3.2.

### Sprocket alignment


Make sure all sprocket teeth are aligned when installing the sprockets (3). Failure to do so will prevent the sprockets from engaging correctly with the belt.

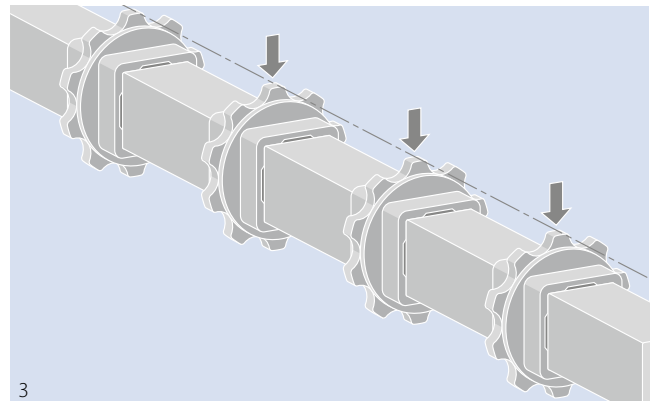

## 5.2 SPROCKET INSTALLATION

### Belt tracking by side wearstrips (side-flexing belts)

When belts are guided by wearstrips mounted on the conveyor sidewalls, all sprockets must be allowed to move freely on the shaft.


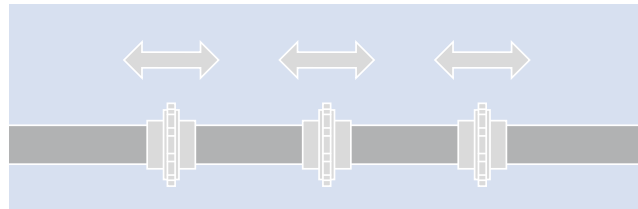


### Sprocket engagement Series 5, 11, Combo (S5 ST/S11)

The teeth of the sprocket must engage into the mesh of the belt at the areas marked by the arrows.

For Series 5, the single-row sprockets must not be installed with the sprocket teeth engaging in the gap between side modules and center modules. The first sprocket should be positioned 62.5 mm from belt edge (see picture below).

By using G or RG tab modules, the tab can limit the sprocket position. Please check always the proper sprocket engagement into the mesh of the belt.

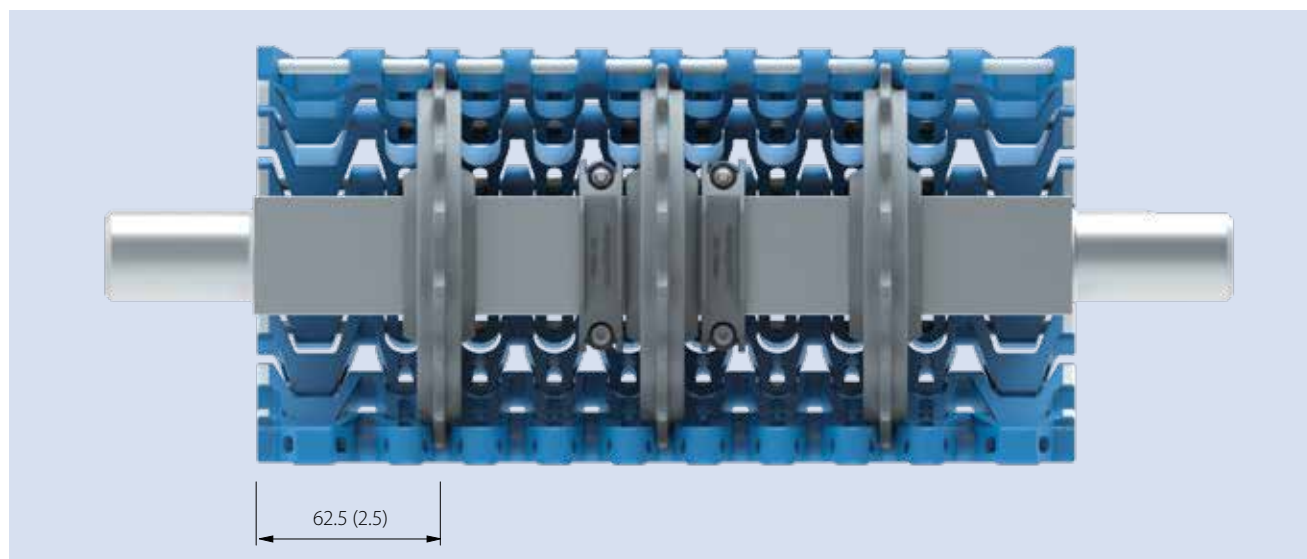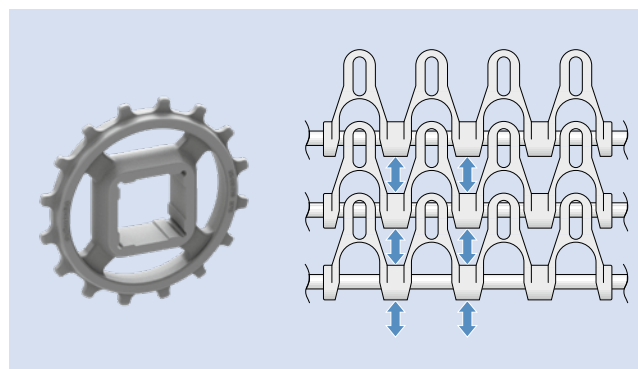


### Sprocket positions and installation Series 11

Series 11 features a special concept where the load is distributed over the outermost hinges by moving the outermost sprocket 75 mm (2.95 in) from the belt edge. At the outermost part of the belt it is supported by idlers (sprocket without teeth) preventing the belt from deflecting at the transfer point.

Forbo Movement Systems recommends fixing the outer idlers on the shaft and preventing them from moving sideways by using retainer rings or other methods. As the belt is guided by the wearstrips, the sprockets should not be fixed and should be free to move sideways on the shaft.


Maximum distance between sprockets is 75 mm (2.95 in).

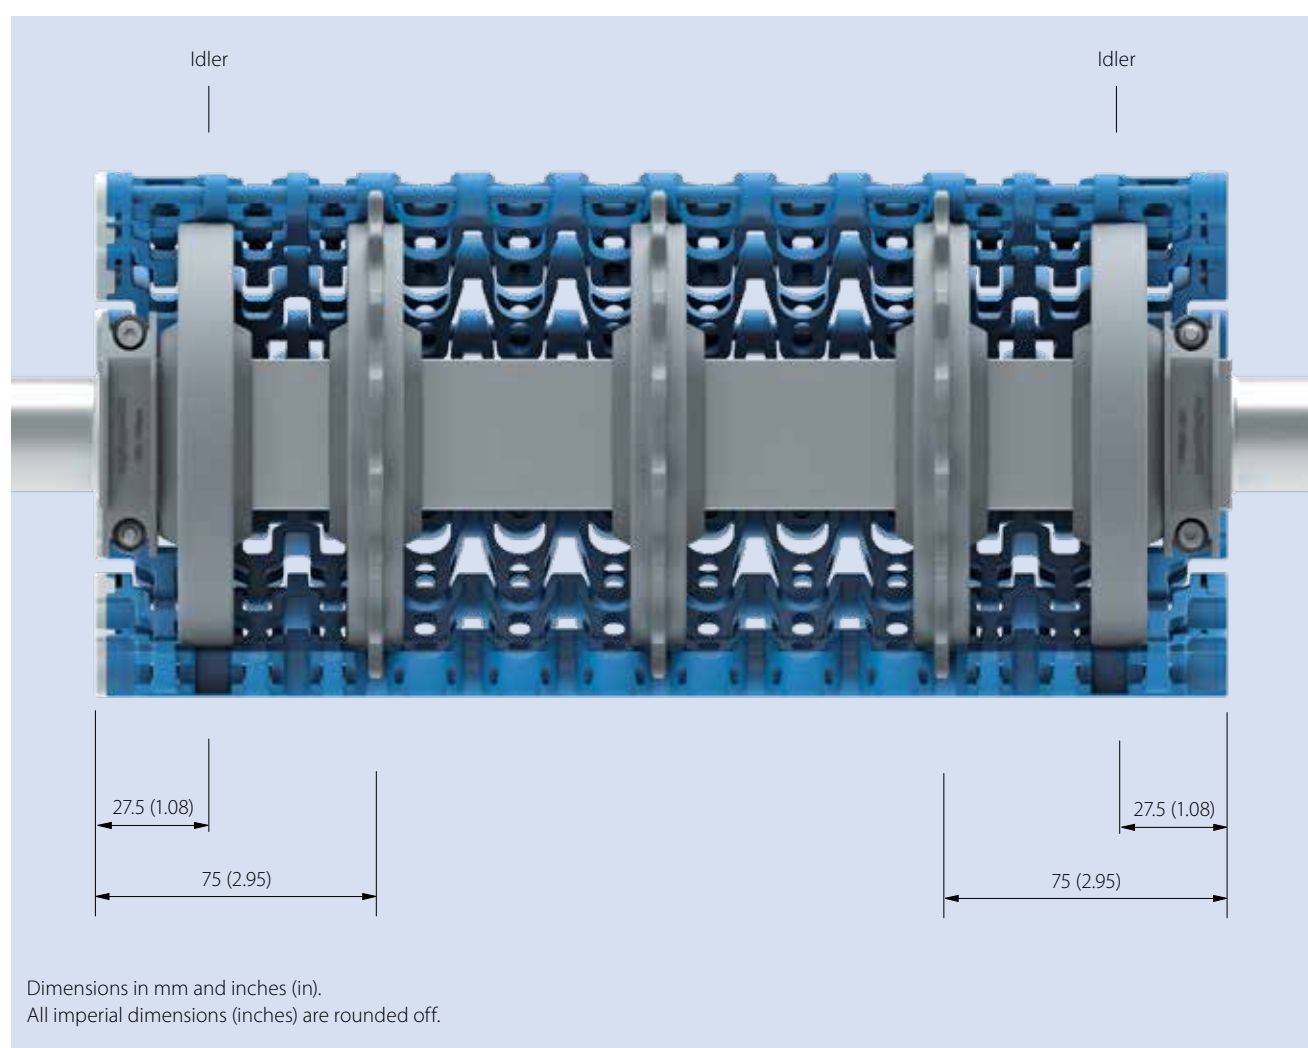


# 5.2 SPROCKET INSTALLATION

## Tooth engagement and sprocket usage series 9.1 – Sprocket S9-Z11 SPR DR

The teeth on the double-row sprocket need to engage with the belt's grid top at the sections marked with arrows.

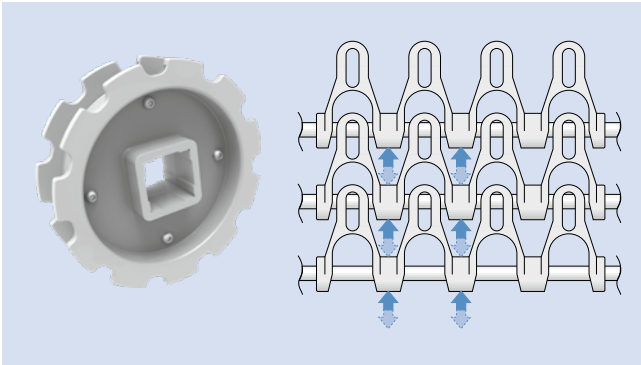

The S9-Z11 SPR DR sprocket was designed for use on straight and curved belts. The preferred drive direction must be complied with (see figure and table below). We don't recommend usage in spiral towers with cage drives. Distance of the first sprocket from the belt edge: 175 mm (6.9 in) – see figure.

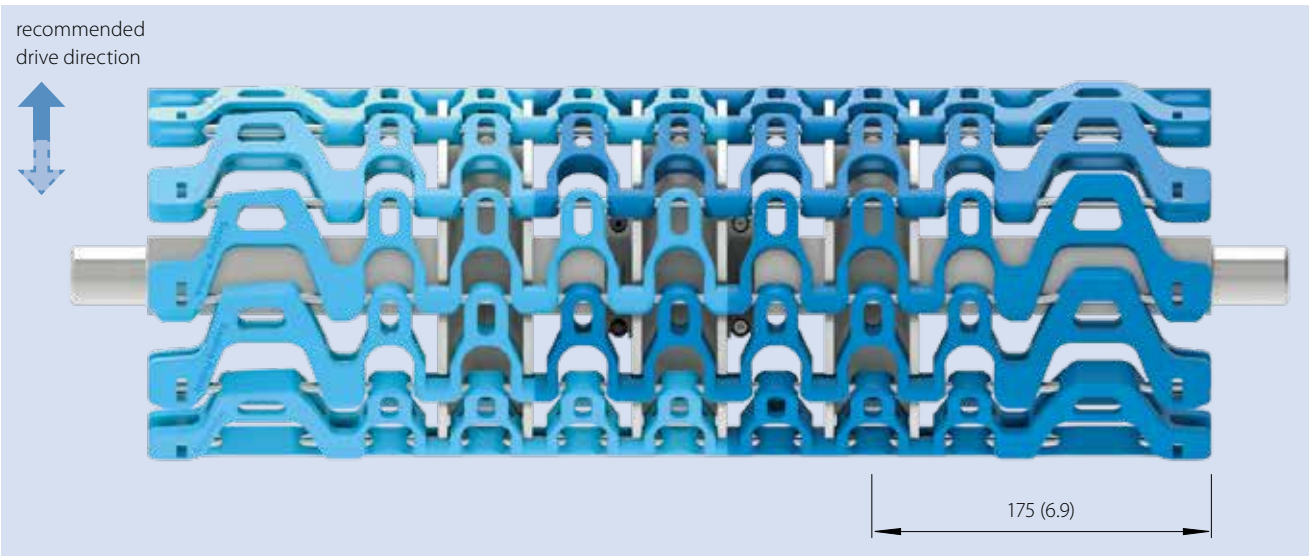


### Recommended usage


Belt	Application	Recommended usage
S9.1-57 GRT	Straight/curved	Use in main conveying direction, only for a short time in the opposite direction and not under load
S9.1-57 GRT	Spiral tower with cage drive	This sprocket is not recommended for series 9.1

### **Tooth engagement and sprocket usage series 9.1 – Sprocket S9-Z10 SPR**

The teeth on the single-row sprocket need to engage with the belt's grid top at the sections marked with arrows.

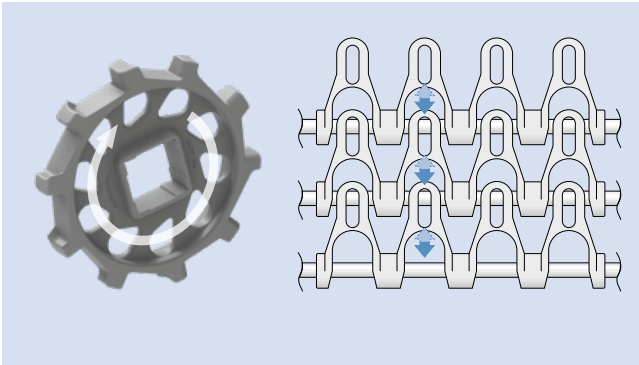

The S9-Z10 SPR sprocket was designed for use in spiral towers with cage drives. The preferred drive direction must be complied with (see figure and table below). We don't recommend using it on straight and curved sections. Distance of the first sprocket from the belt edge: 125 mm (4.9 in) – see figure.

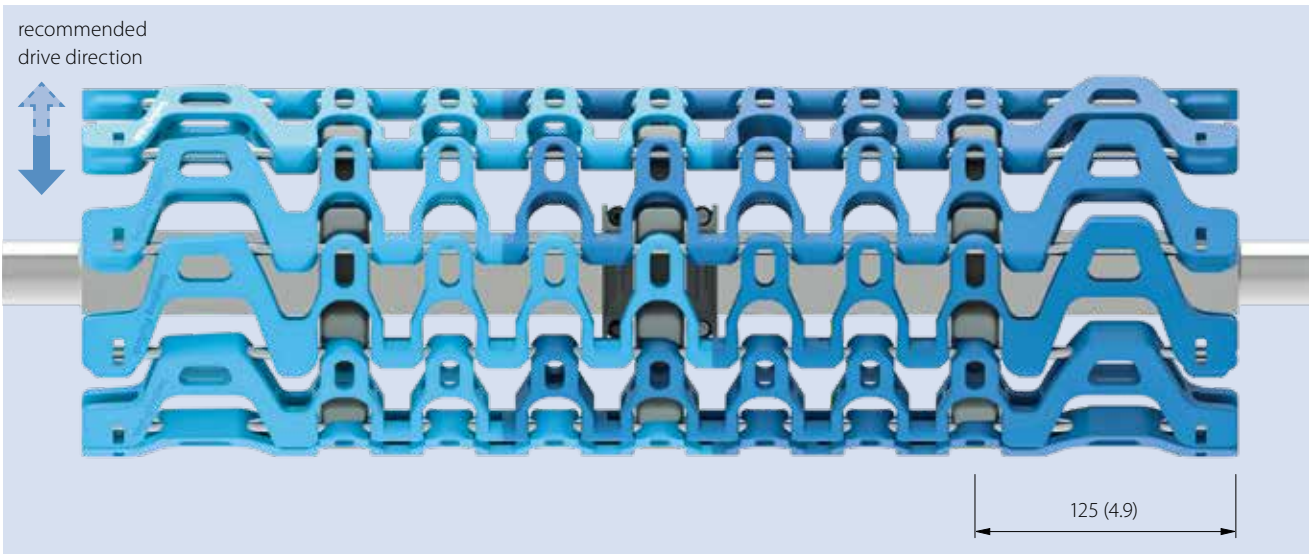

### **Recommended usage**

Belt	Application	Recommended usage
S9.1-57 GRT	Straight/curved	This sprocket is not recommended for series 9.1
S9.1-57 GRT	Spiral tower with cage drive	Use in main conveying direction, only for a short time in the opposite direction and not under load



## 5.2 SPROCKET INSTALLATION

### Sprocket engagement Series 18


Two row sprocket for bi-directional drive.

The sprocket should press to the eyelet for required drive direction.

By using G tab modules, the tab can limit the sprocket position. Please check always the proper sprocket engagement into the mesh of the belt.

Our recommendation is to place the first sprocket as close as possible to the belt edge. The below illustration shows the minimal sprocket distance in relation to the used outside modules (collapse factor 2.2 or 1.7).


S18 Combo belt is a combination of both types.

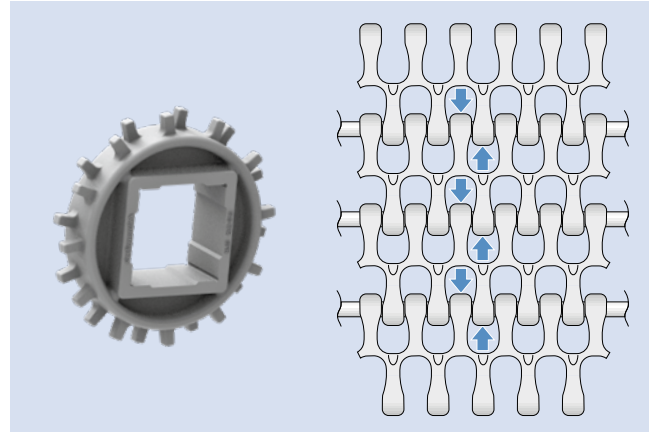

**S18-44 2.2**

SM B


SM A

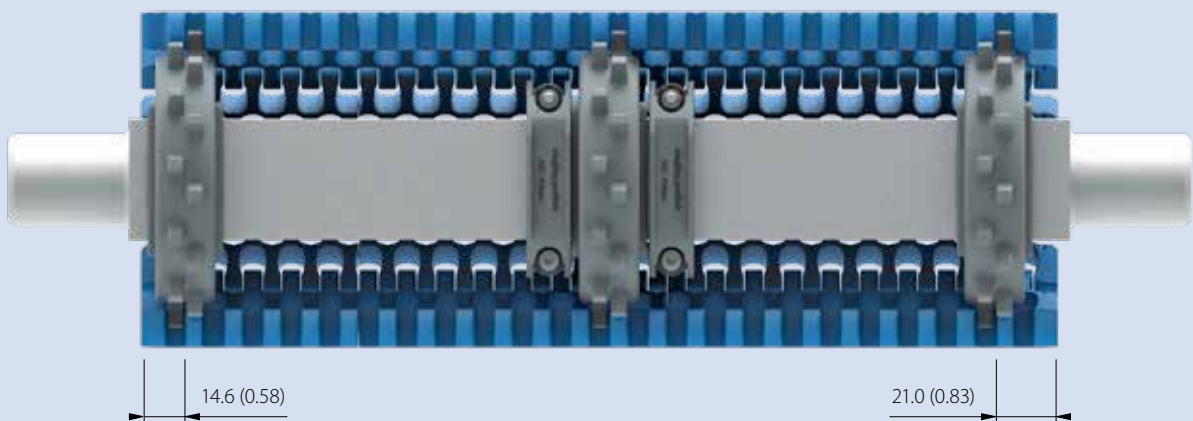

**S18-44 1.7**

SM B

SM A

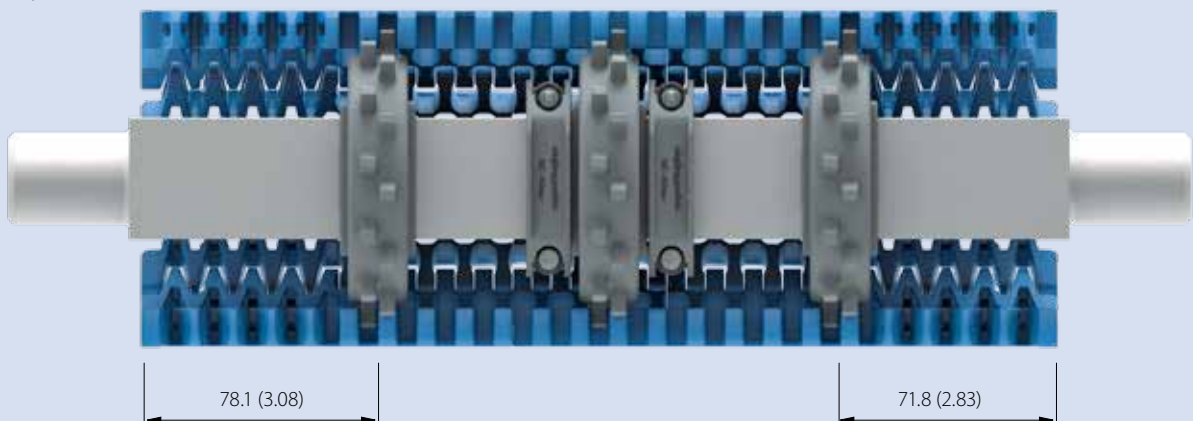



## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS

### Belt support, guiding, tracking

The belt is pressed onto the inner radius in curved sections. Lateral wearstrips need to be installed to cover the pressure. We recommend guiding the belt along the conveyor by lateral wearstrips, which means that the middle sprocket must not be fixed axially. All sprockets can float on the shaft. The belt is guided by the lateral wearstrips only.

The key criterion for a successful side-flex conveyor are to ensure and maintain the correct distances between the outer parallel wearstrips in curved and straight segments. The distance between the outer wearstrips is especially important. The wider the belts the greater the effort required to keep the exact distances through the whole running track of the belt (both on the carry and the return-way).

### Belt lift


In some cases the belt tends to lift up at the outer edge. The risk of that increases with higher belt pull, smaller inner radius, higher speed and higher curve angle. To avoid this, wearstrips on top of the edge are to be installed. Forbo Movement Systems offers also belts with guided side modules or Hold Down Tabs if required.

### Preventing belt lift (Series 11)

If the center supports are positioned above the outmost support, the belt may form a slight convex surface with the highest point in the middle (red line below). On heavily loaded conveyors this may lead to the belt lifting out of the guides. It is therefore vital to ensure that the center supports are level with or lower than the outermost belt supports. To

prevent any peak loads from forcing the belt out of the guides, Forbo Movement Systems recommends positioning the center supports 1–3 mm (0.04–0.12 in) below the outer support surfaces.

This ensures that the belt will be pushed towards the center support (green line below) and not be pushed up and out of the guides.

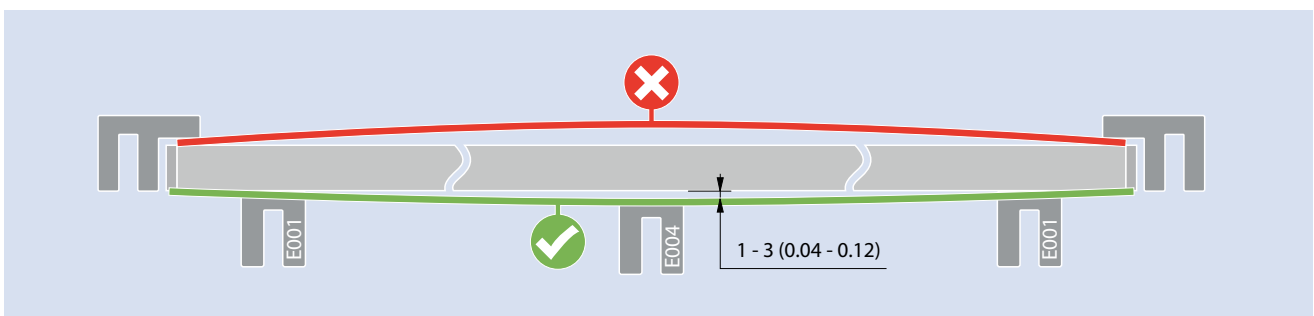


Series 5 and 9 are assembled with steel pins causing a higher stiffness. This reduces the tendency to belt lift in the first place and secondly makes the belt much more laterally stiff

such that a lower positioned center wearstrip would not lead to a bow downwards but rather leave space between the wearstrip and belt.



## Recommended wearstrip arrangement for Series 5/Series 9/Series 9.1

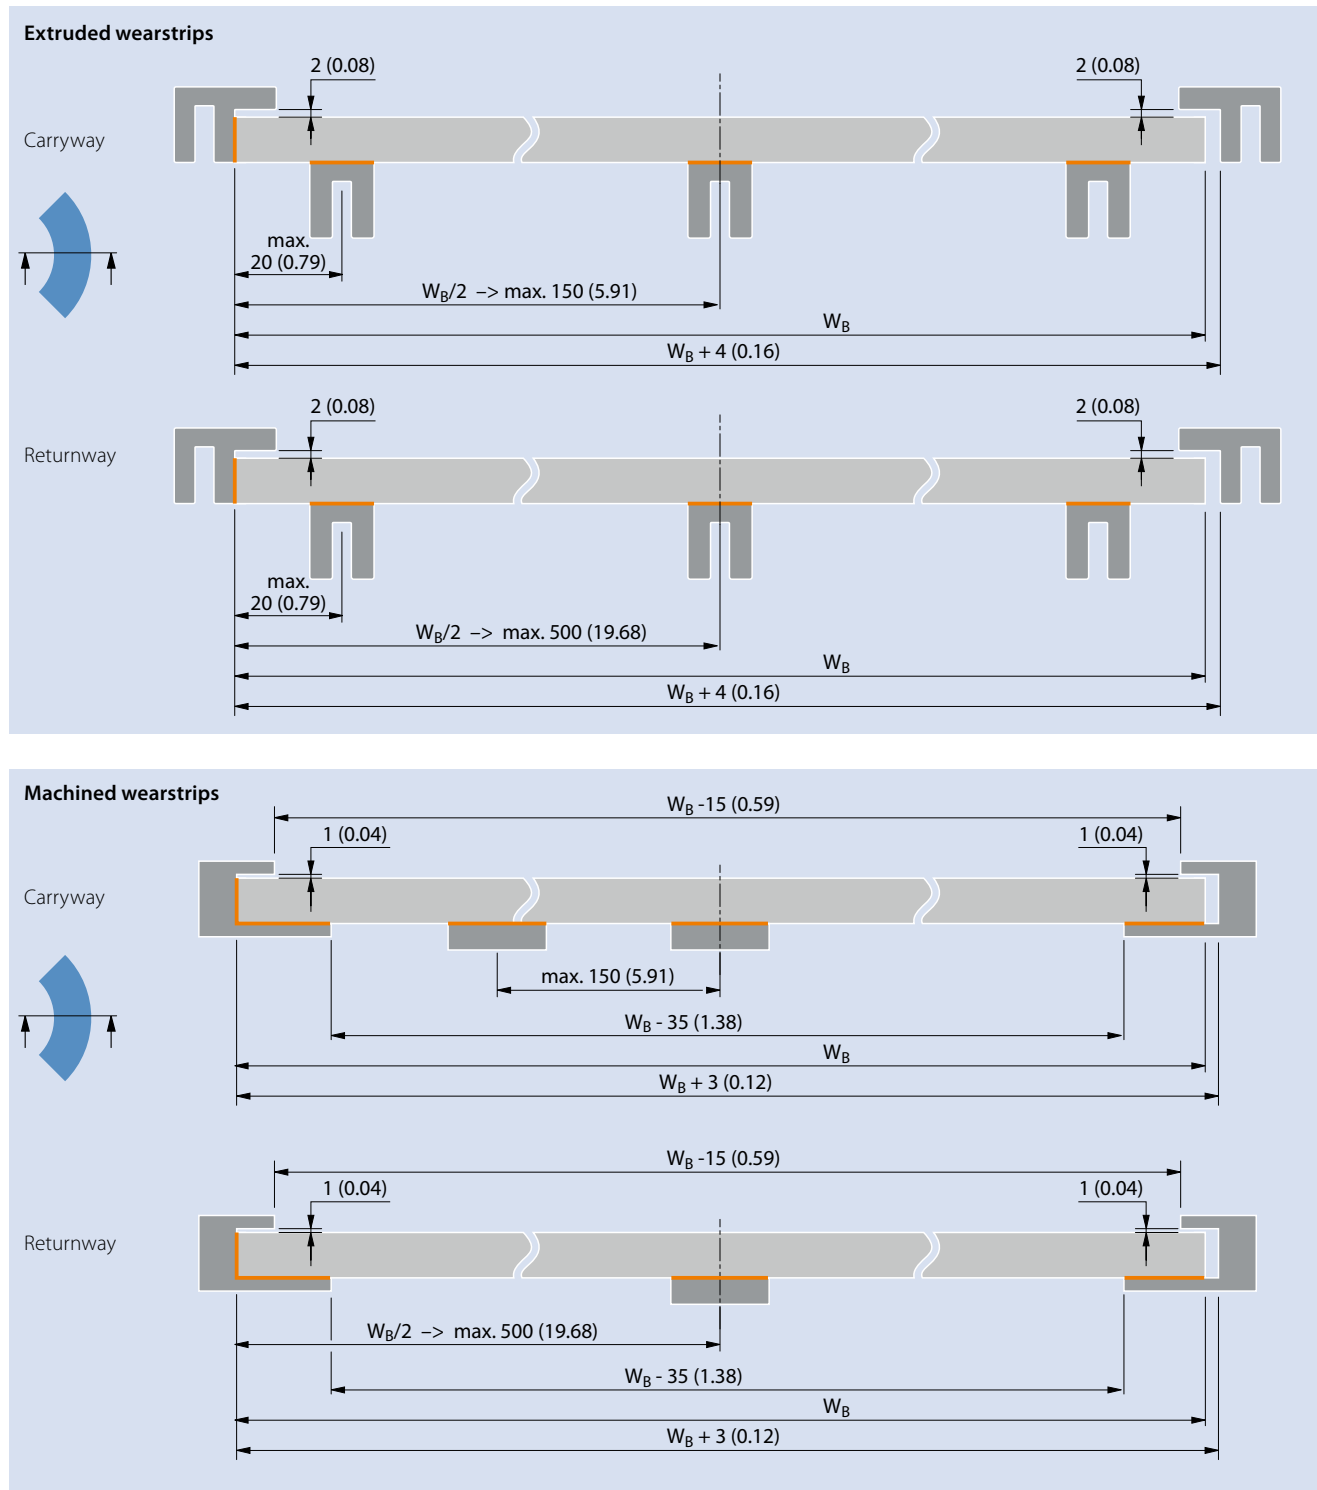


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS

### Recommended wearstrip arrangement for Series 5/Series 9 belts with guided side modules

Hold Down guides are used to prevent belt lift and allow two neighboring belts to run parallel with minimum gap. Using Hold Down guides can also allow for products to extend beyond the belt width or to transfer perpendicular to travel direction as no wearstrip extends above the belt surface.

In general, it is recommended that the radial force be absorbed by the wear strip on the inner radius.

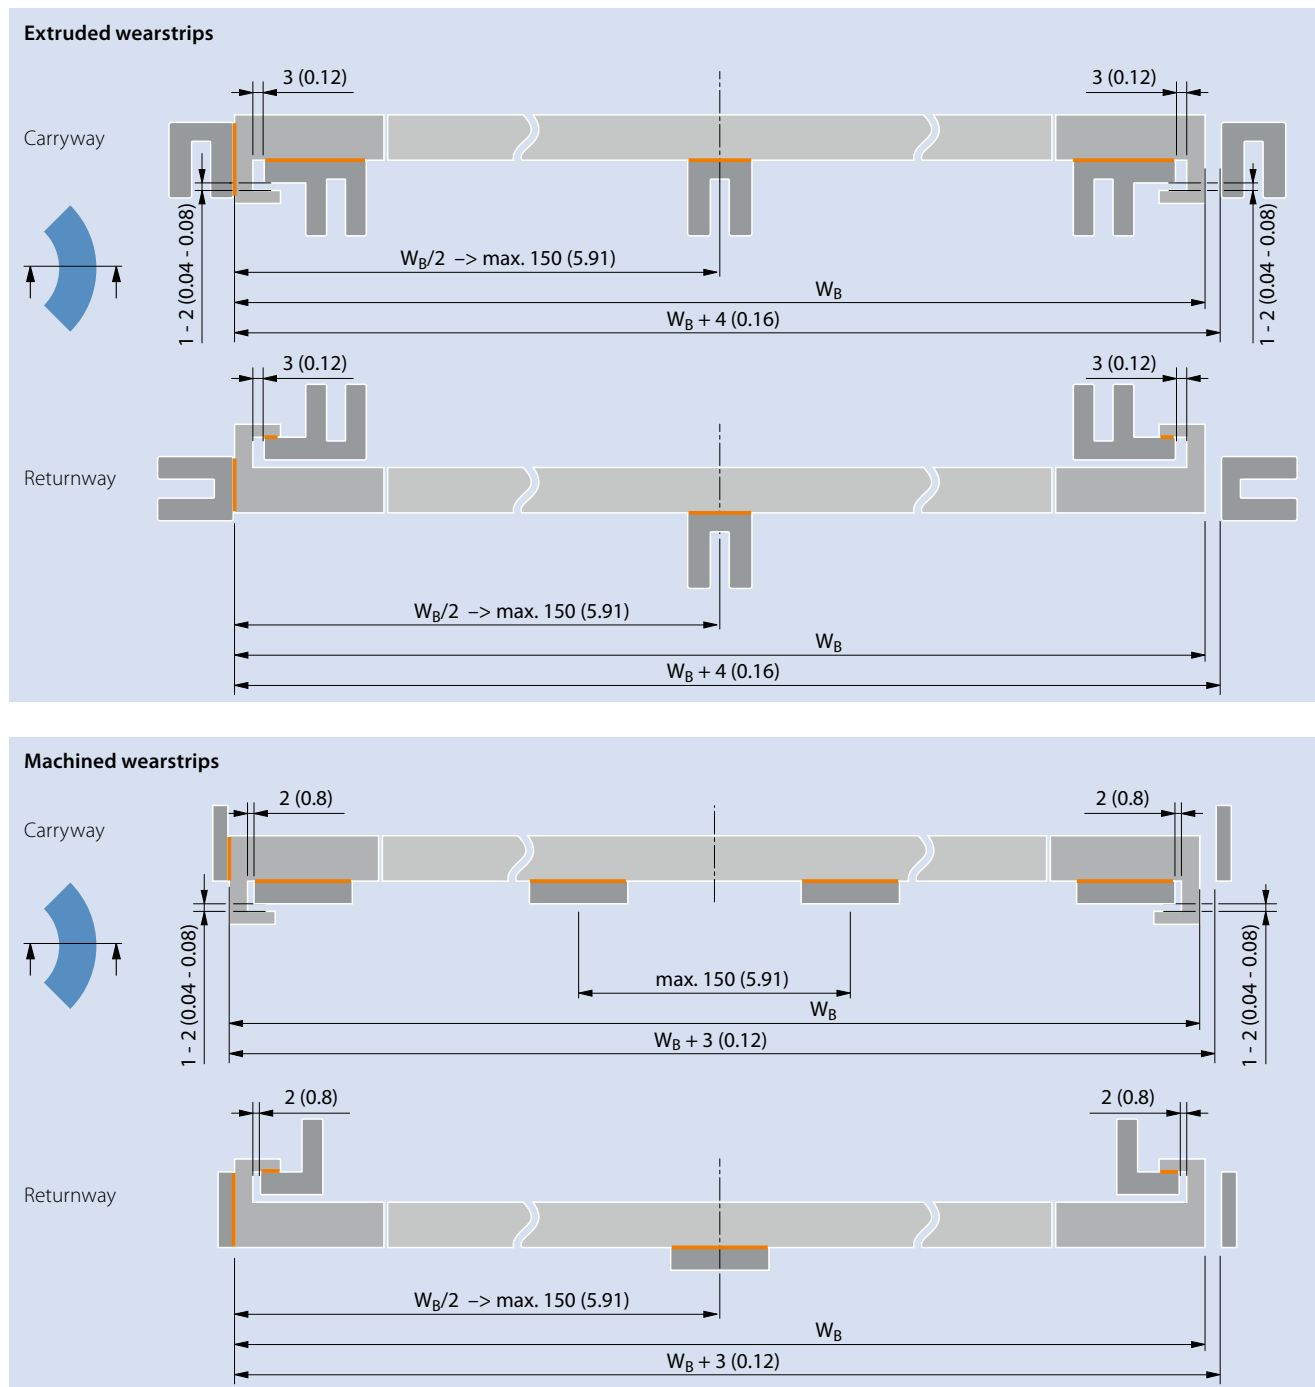


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.


For a smooth run, especially for high curve radius compared to collapse factor ( $C_c$ ) of the belt, a support at the outside G-tab is possible.

- only for POM-CR edge modules
- belt strength curve  $\leq 60\%$  of nominal belt strength
- belt speed  $< 30$  m/min

#### Extruded wearstrips

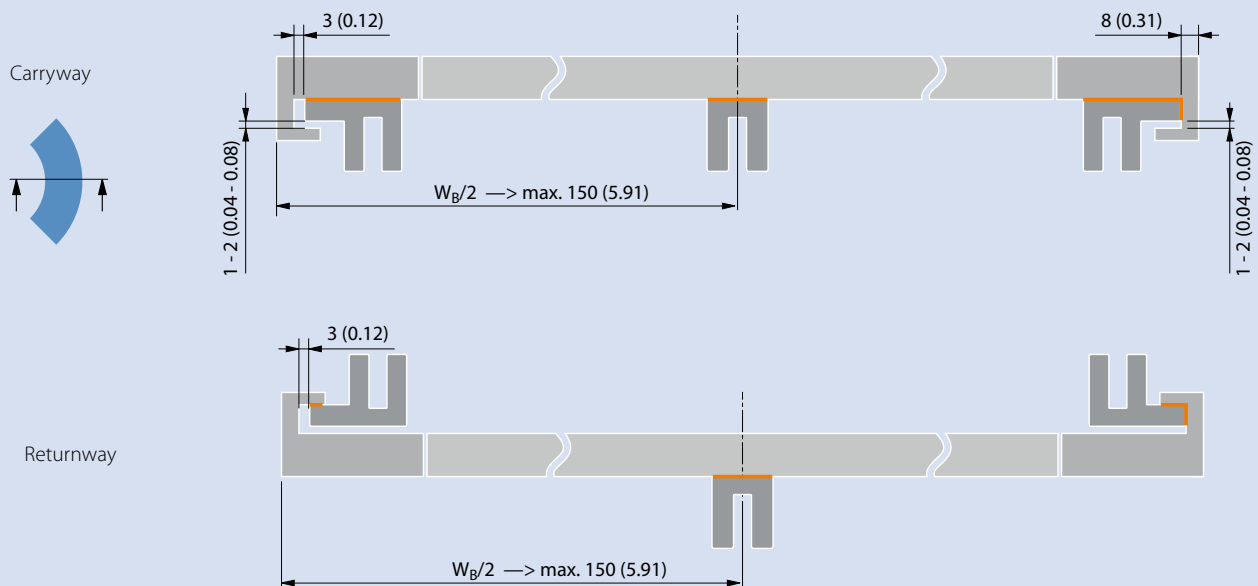


#### Machined wearstrips

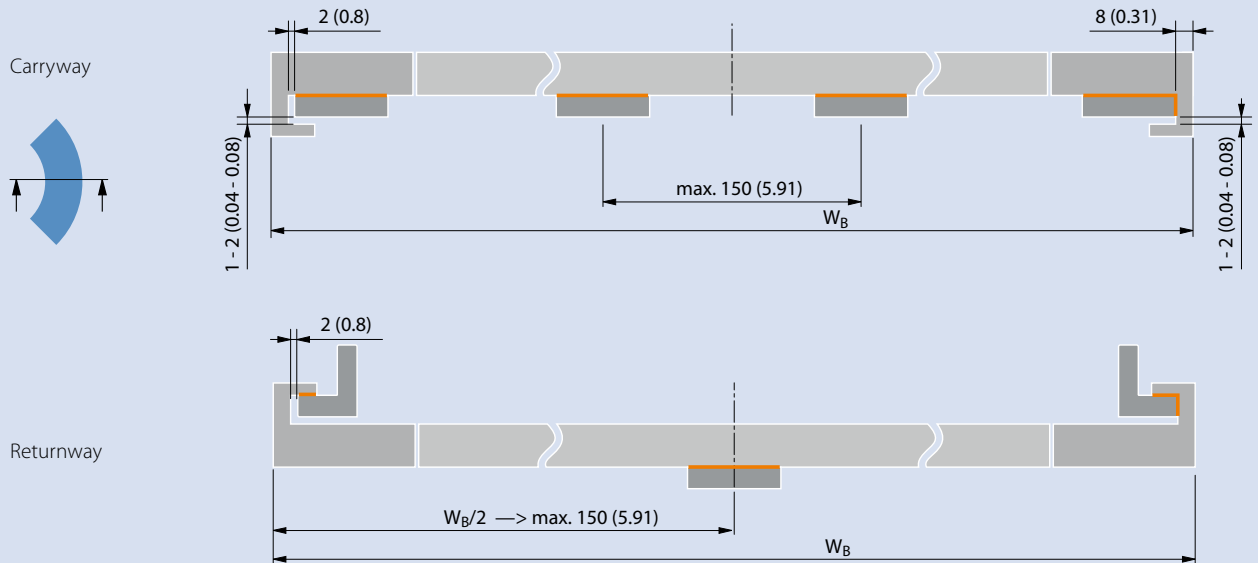

## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS


### Recommended wearstrip arrangement for Series 5 belts with reverse guided side modules

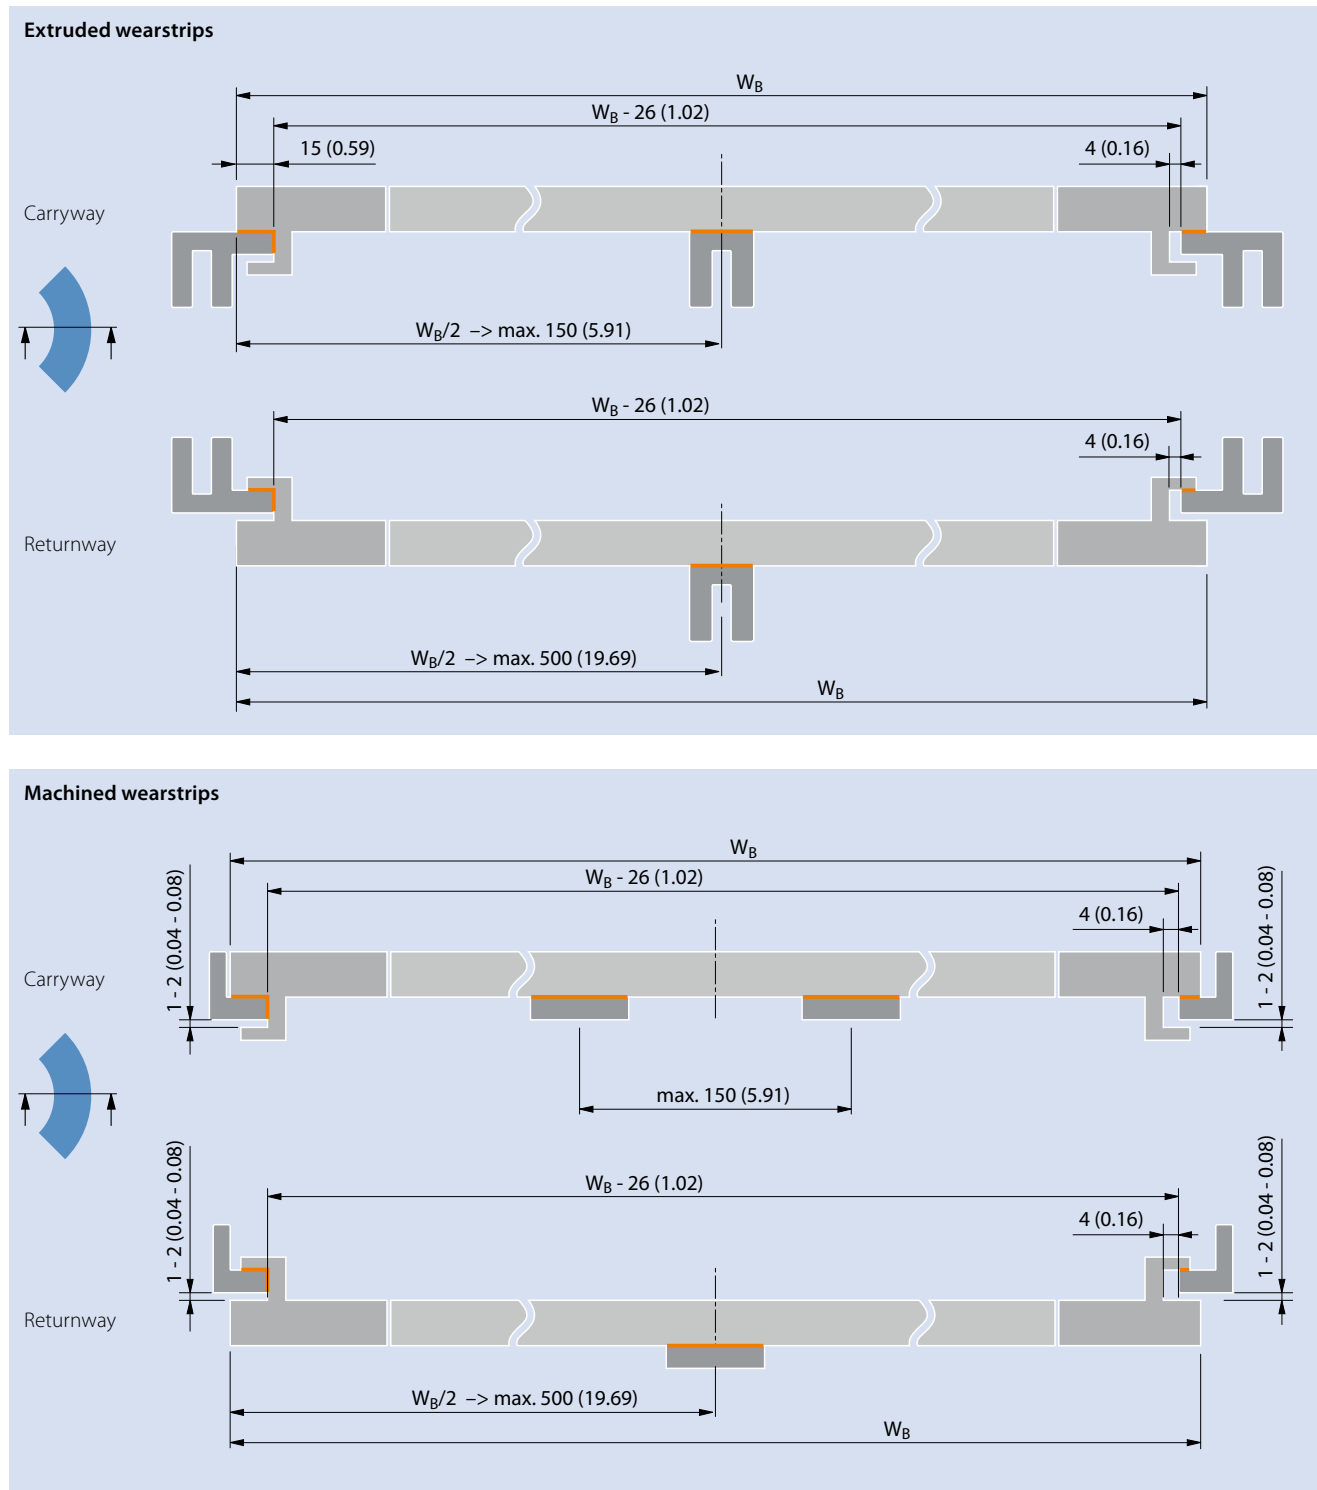

Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.


For a smooth run, especially for high curve radius compared to collapse factor ( $C_c$ ) of the belt, a support at the outside RG-tab is possible.

- only for POM-CR edge modules
- belt strength curve  $\leq 60\%$  of nominal belt strength
- belt speed  $< 30$  m/min

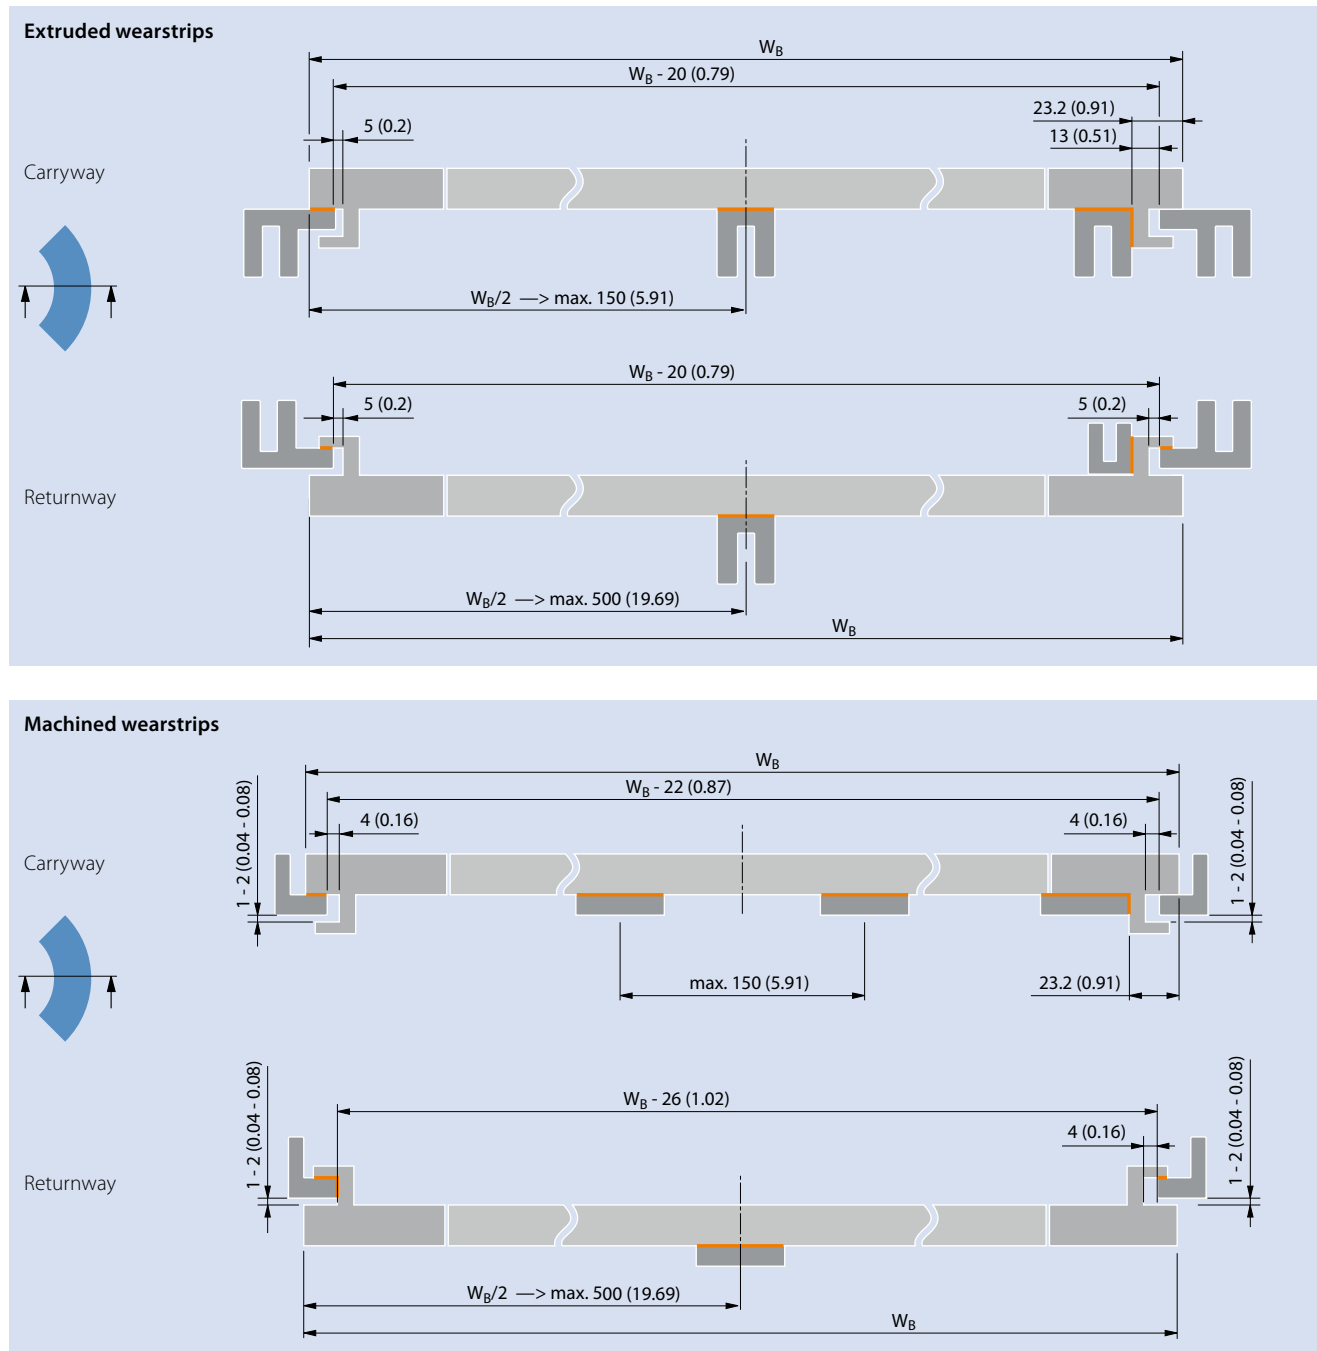

## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS


### Recommended wearstrip arrangement for multiple parallel Series 5 belts with reverse guided side modules

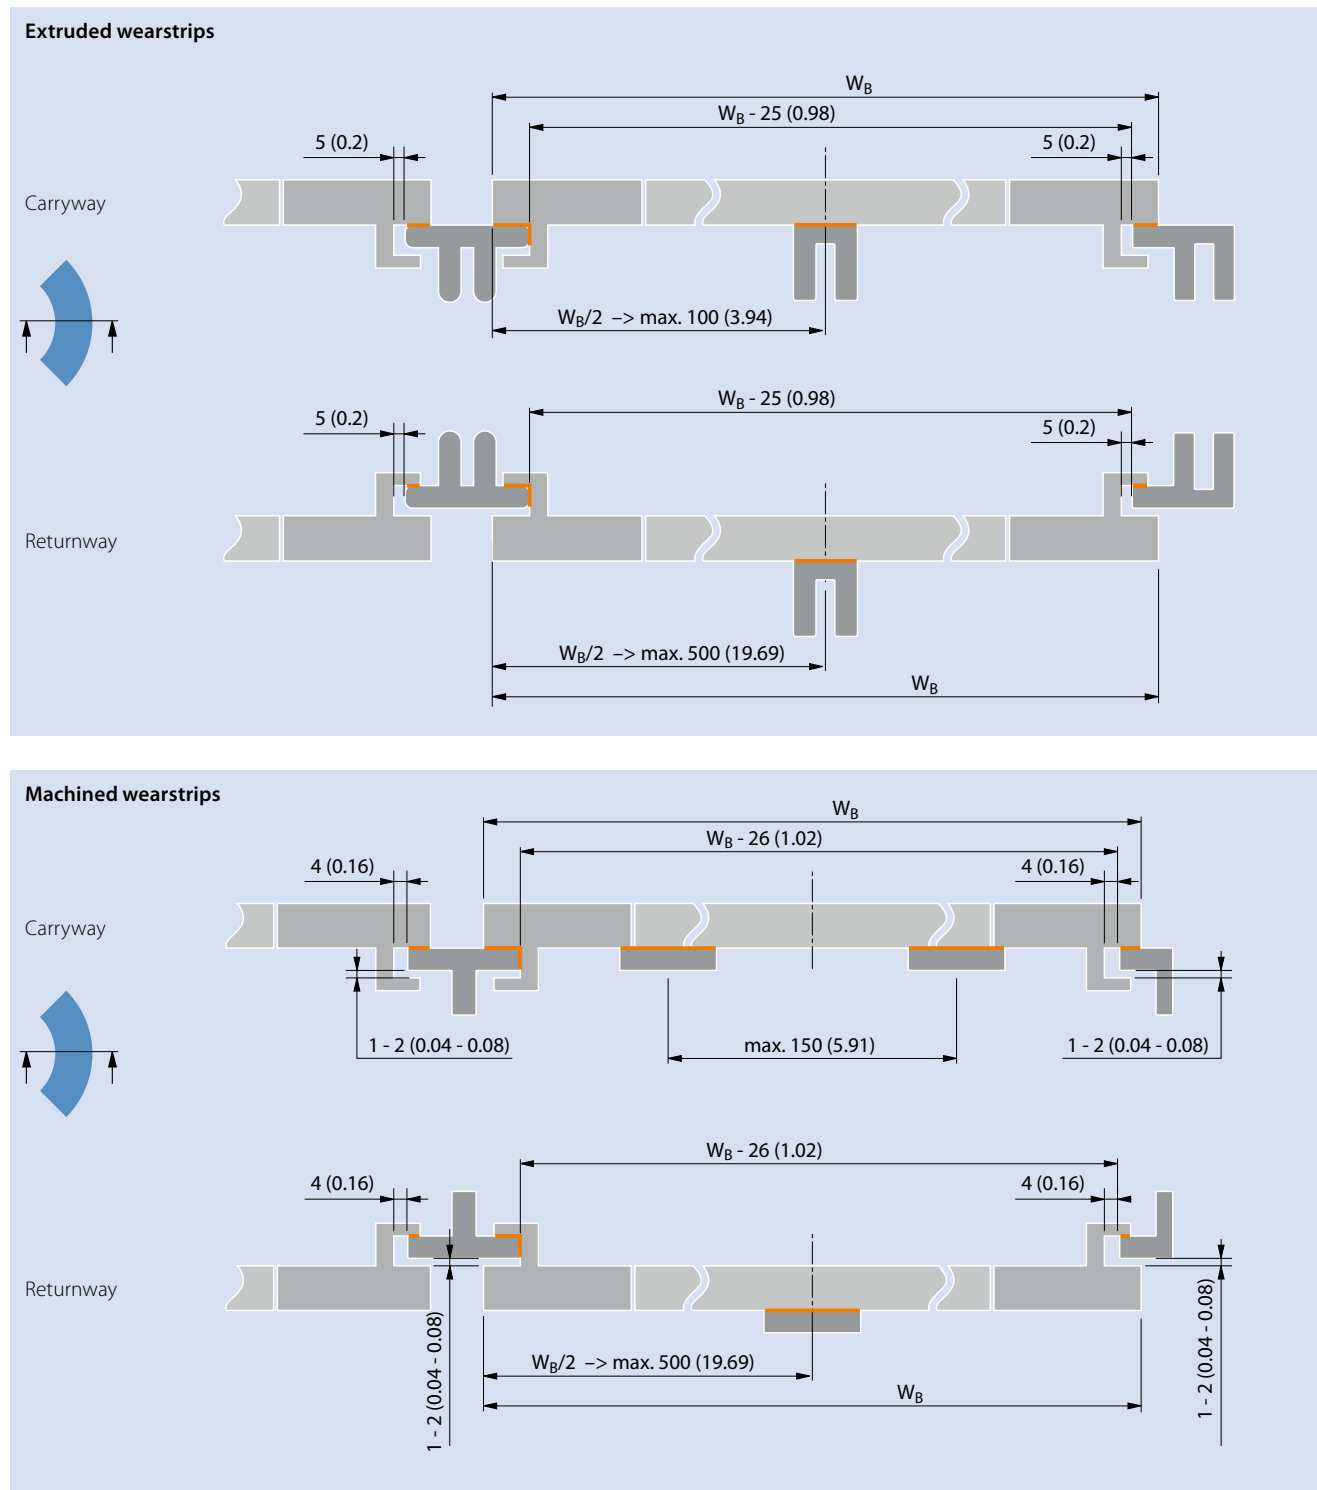

Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

### Special conditions for Series 5 variant S5-45 GRT BT


The following illustrations show the recommended critical dimensions

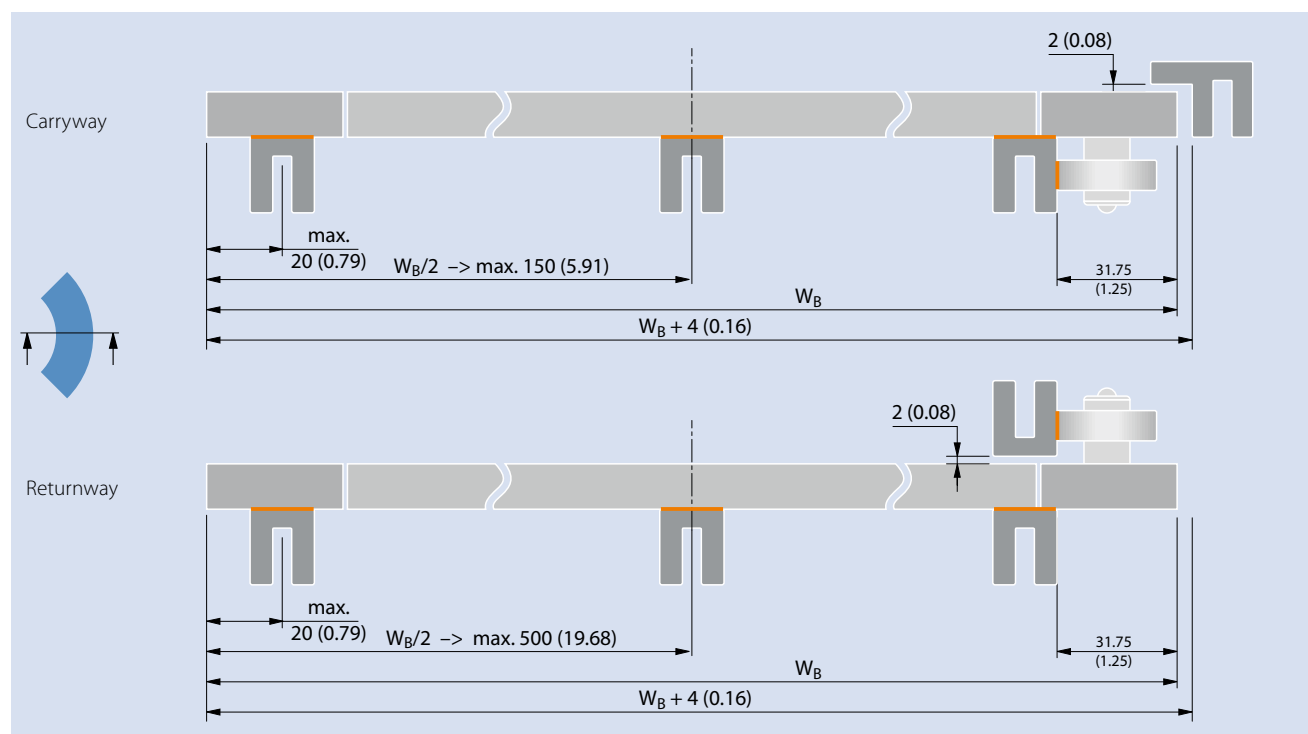

Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.


## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS

### Recommended wearstrip arrangement for Series 11 with caps

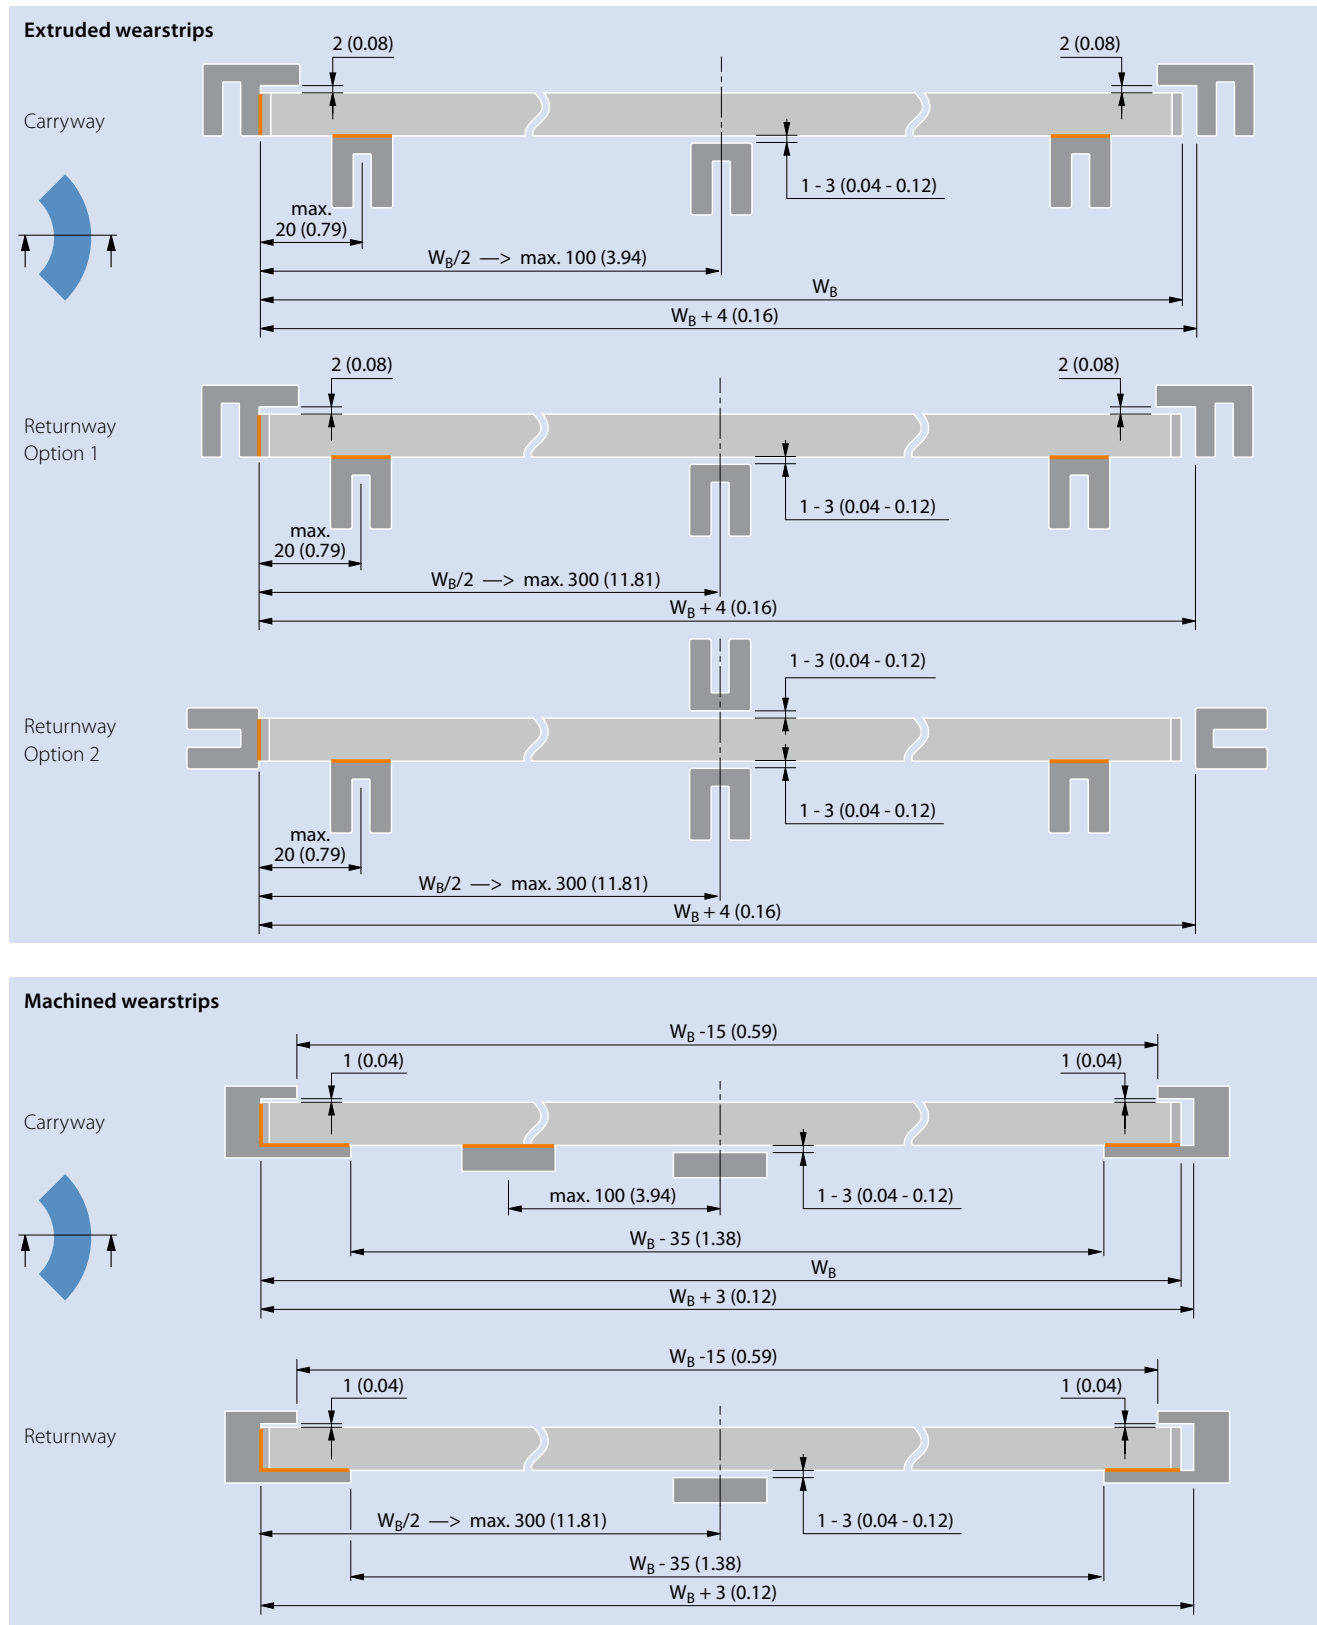




## Recommended wearstrip arrangement for Series 11 with Hold Down caps

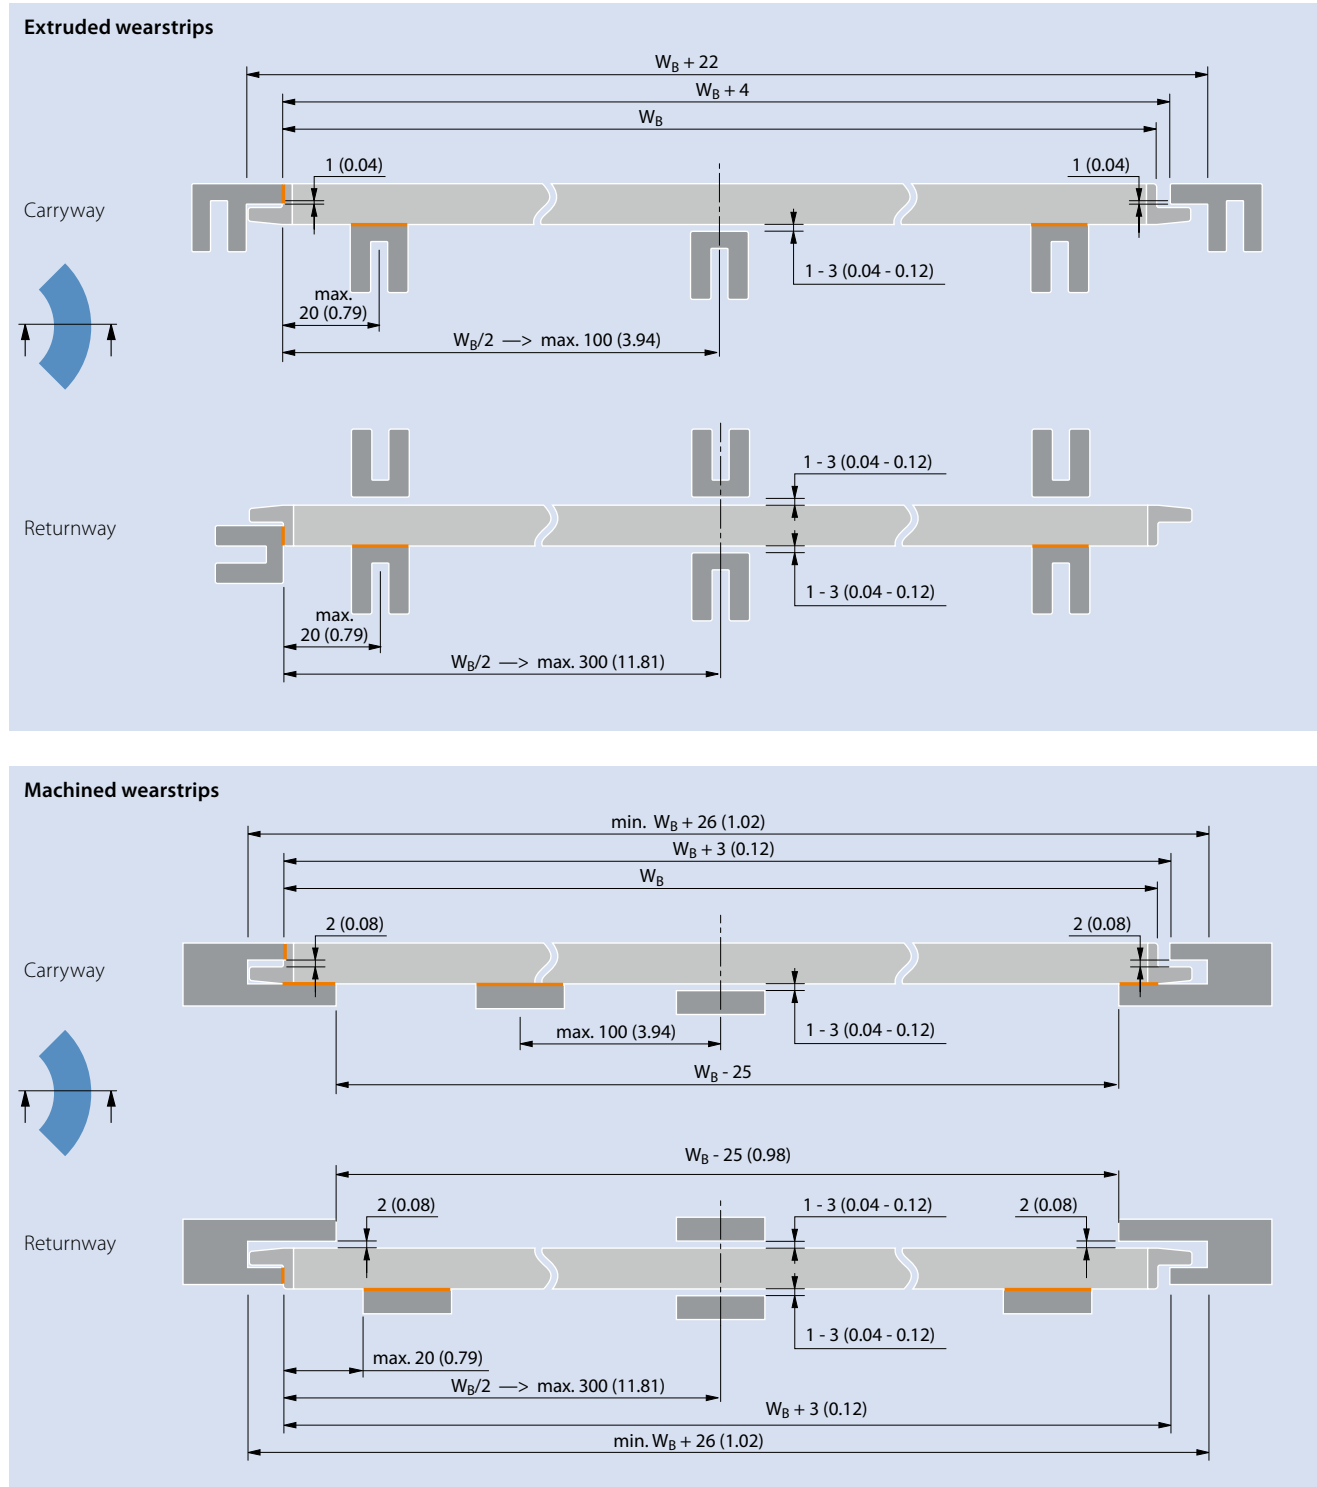

Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS


### Recommended wearstrip arrangement for Series 18 variant S18-44 GRT

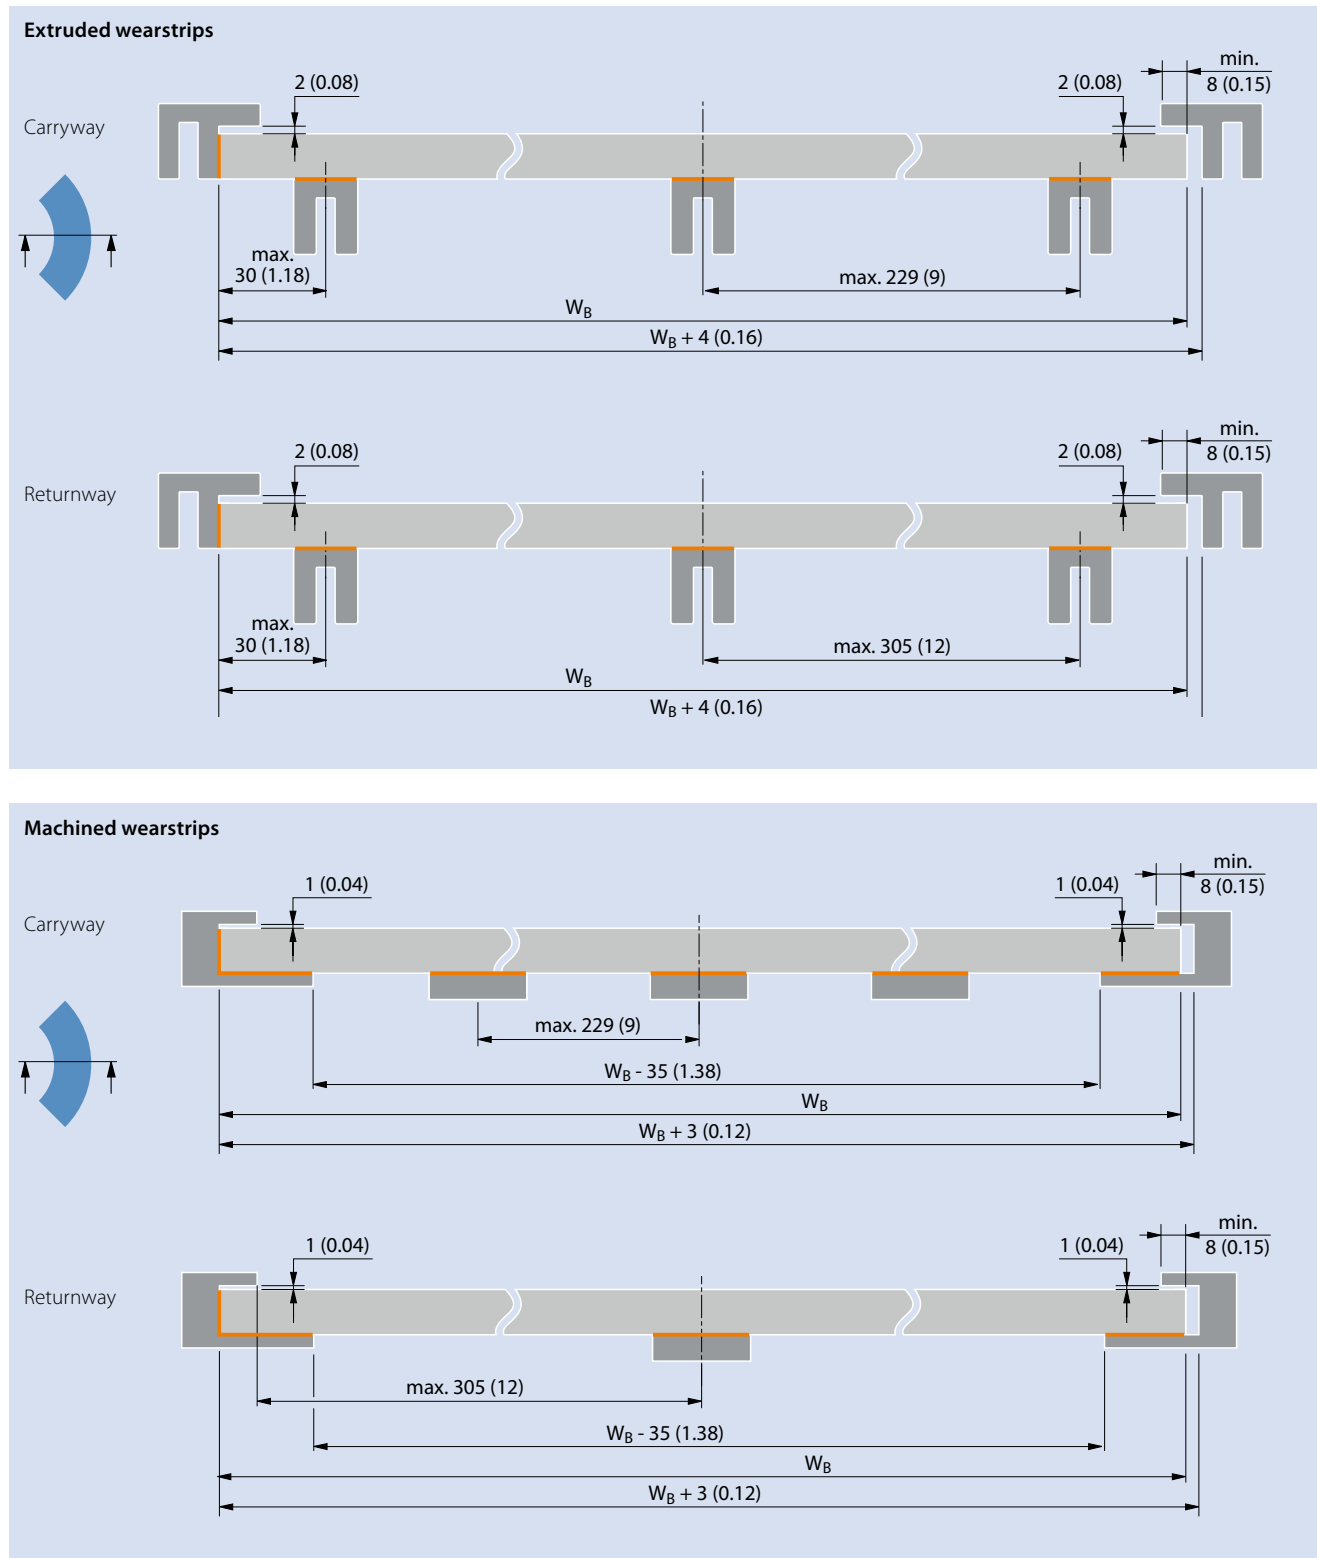


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

### Recommended wearstrip arrangement for Series 18 variant S18-44 GRT G

### Extruded wearstrips

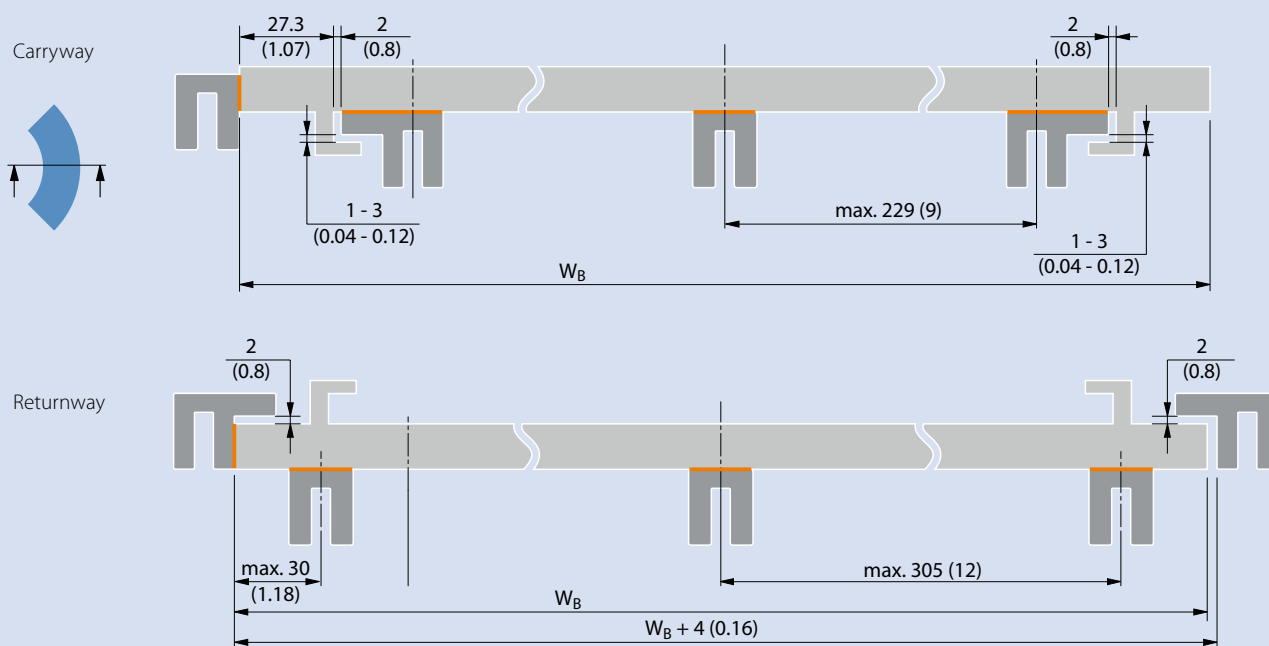

### Machined wearstrips

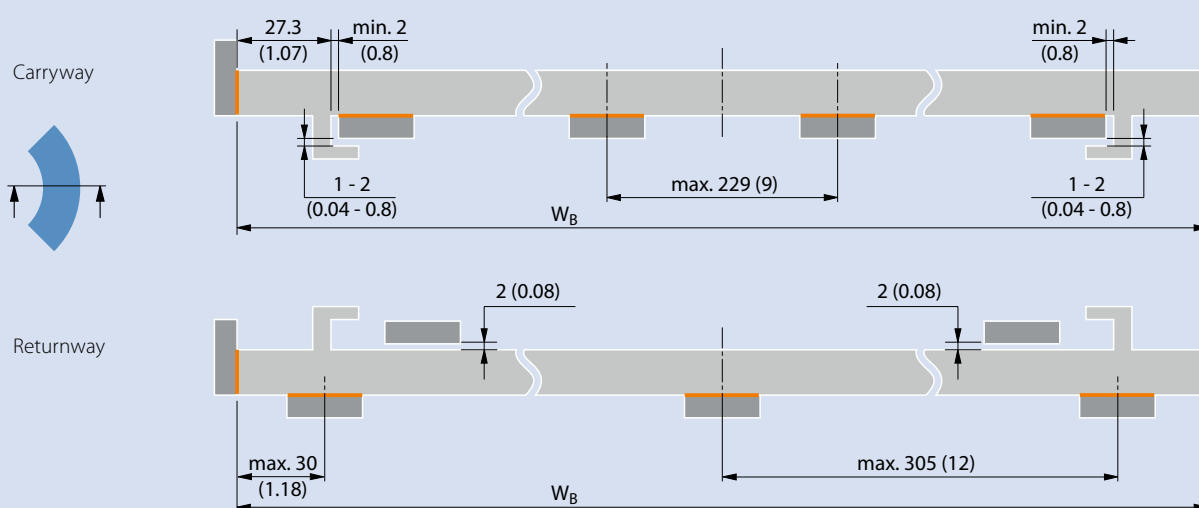


Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

## 5.3 WEARSTRIP ARRANGEMENT CURVE BELTS


For a smooth run, especially for high curve radius compared to collapse factor ( $C_c$ ) of the belt, a support at the outside G-tab is possible.

- only recommended for POM and PA belts
- nominal belt pull, curve  $\leq 1000$  N

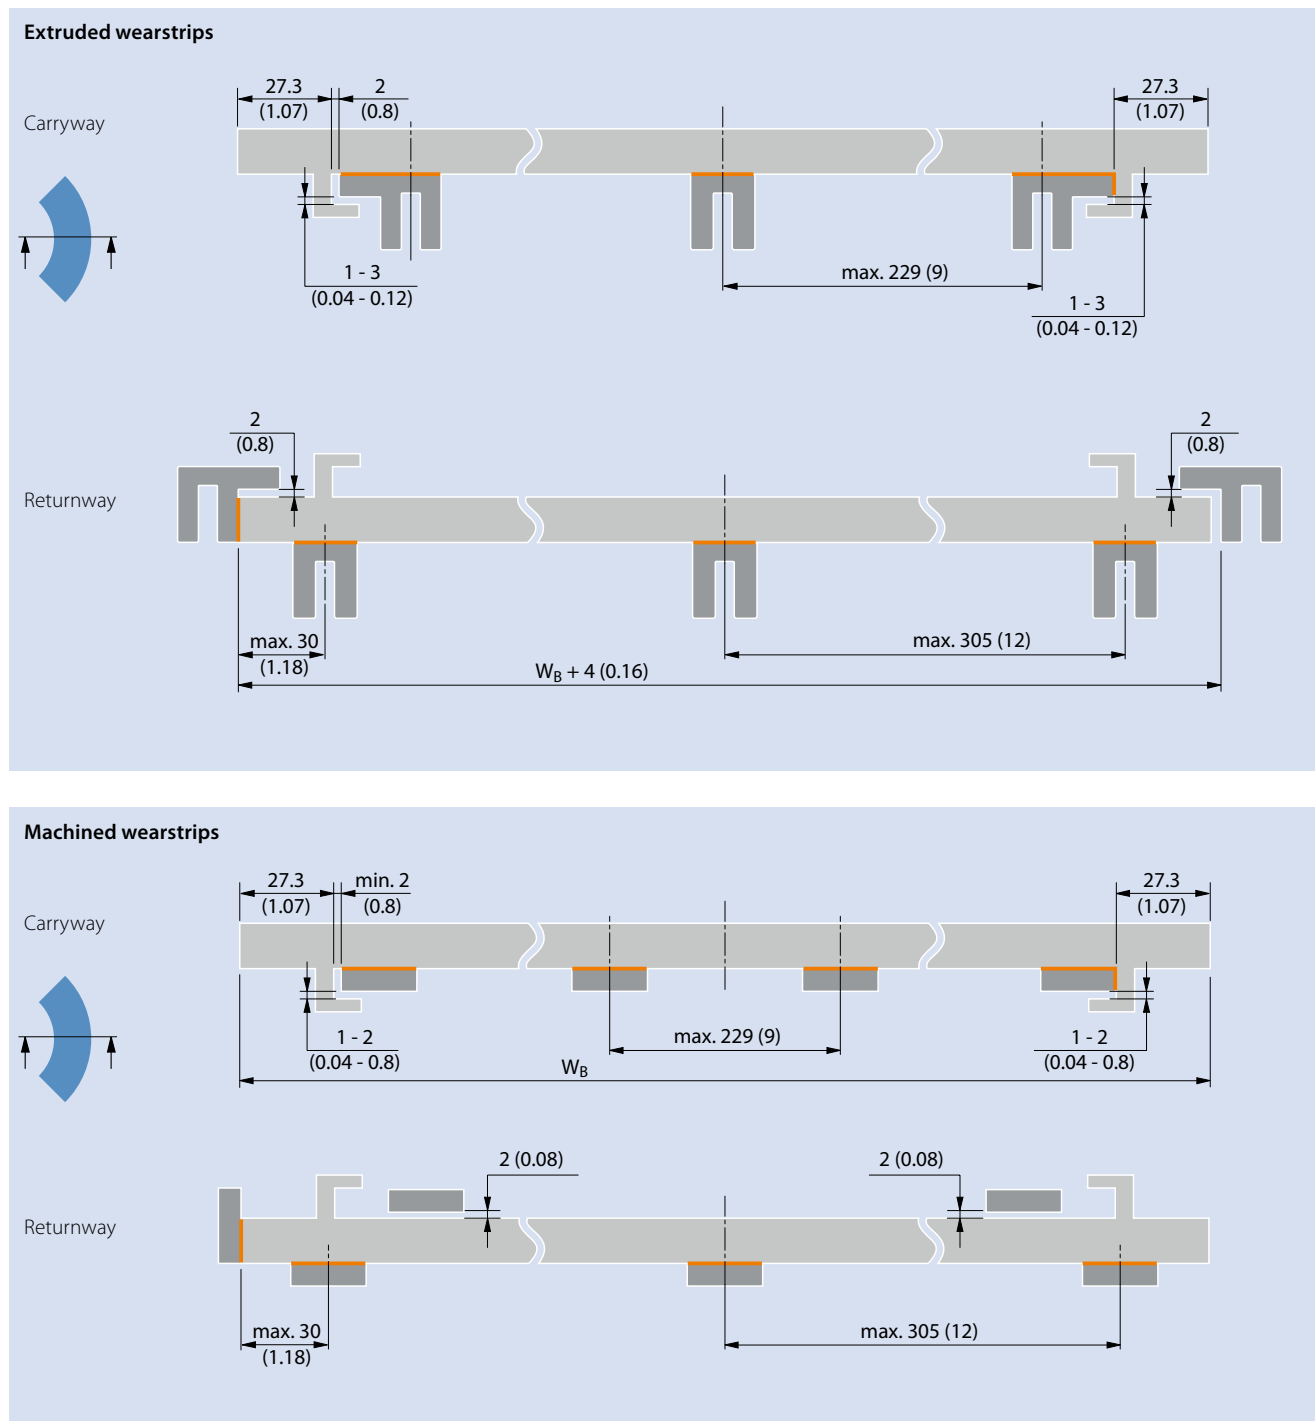


## Recommended wearstrip arrangement for Series 18 variant S18-44 HDK

### Extruded wearstrips

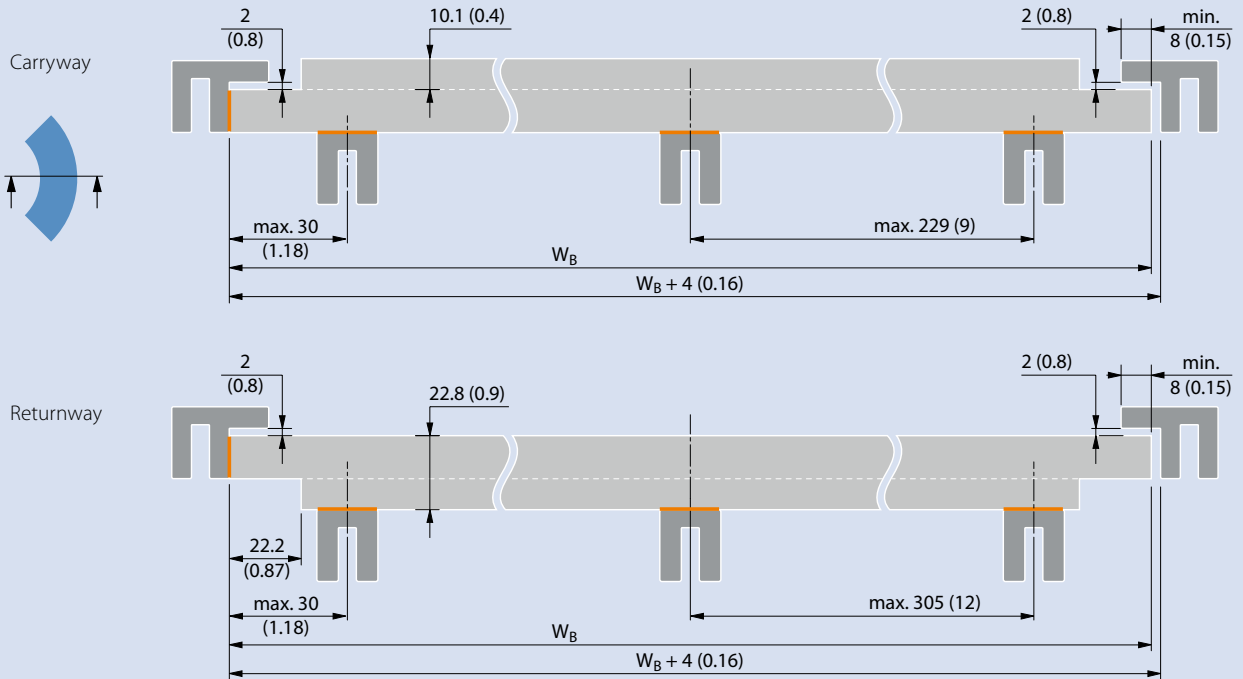

### Machined wearstrips

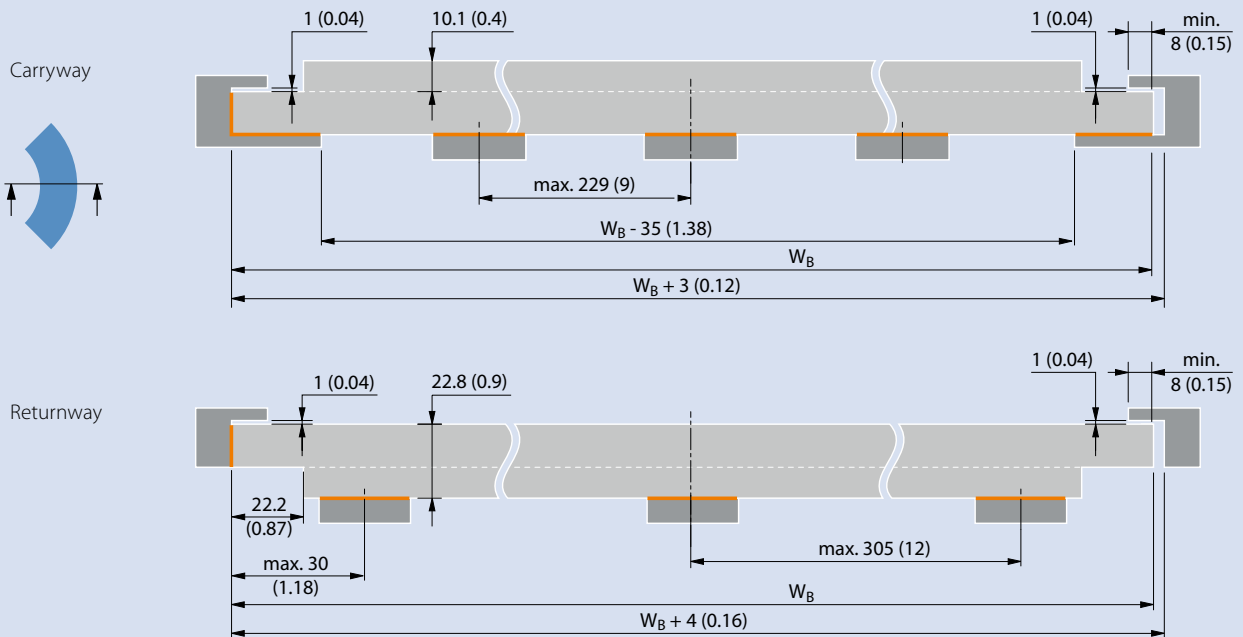

Dimensions in mm and inches (in). All imperial dimensions (inches) are rounded off.  
Contact areas in orange.

## 5.4 JOINING BELT SECTIONS

### Installing and removing hinge pins


Depending on the series, Siegling Prolink Modular Belts utilize hinge pins with heads and locking collars or with locking collars only. Series 5 and Series 9 belts in radius belt applications utilize stainless steel pins with machined grooves.

If the belt is wider than the longest molded pin, it is either assembled with two molded pins per row, or if the belt is


more than twice the width of the longest pin, with three pins per row. In case of the latter, an extruded head-less and collar-less pin is floating between two pins with molded heads and/or locking collars.

For instructions on how to install and remove hinge pins, please refer to the specific belts series shown in the illustrations below.


### Series 1, 2, 4.1, 8, 8.1

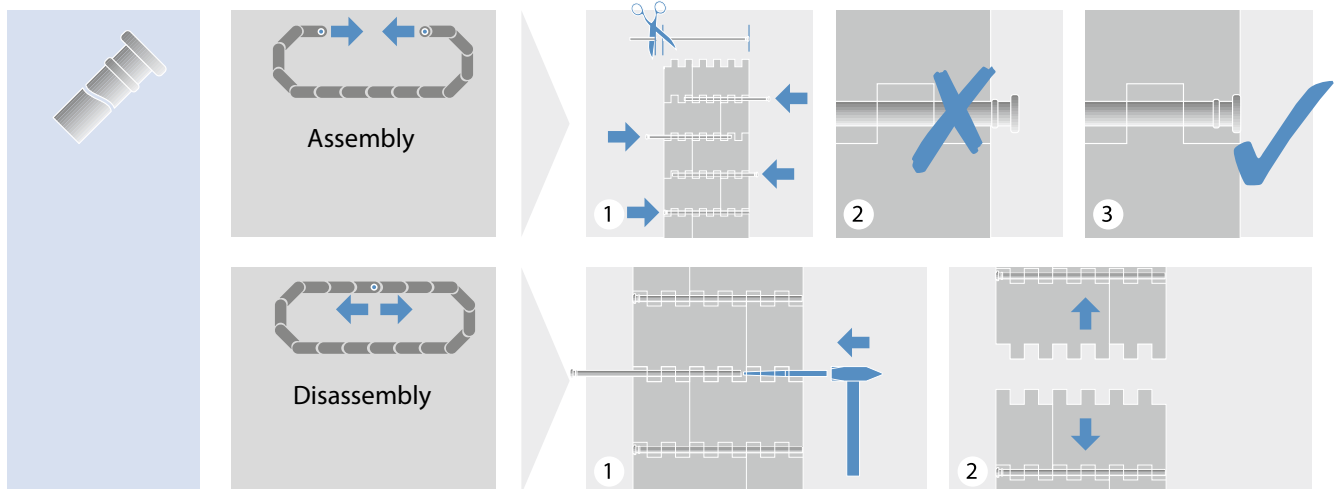


### Series 5

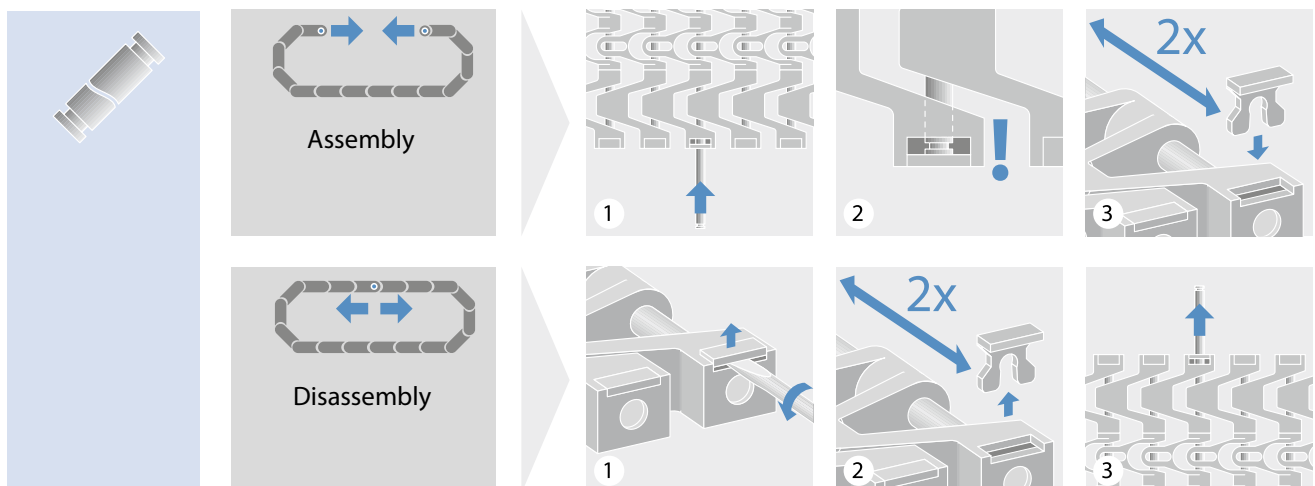


## Series 5 ST

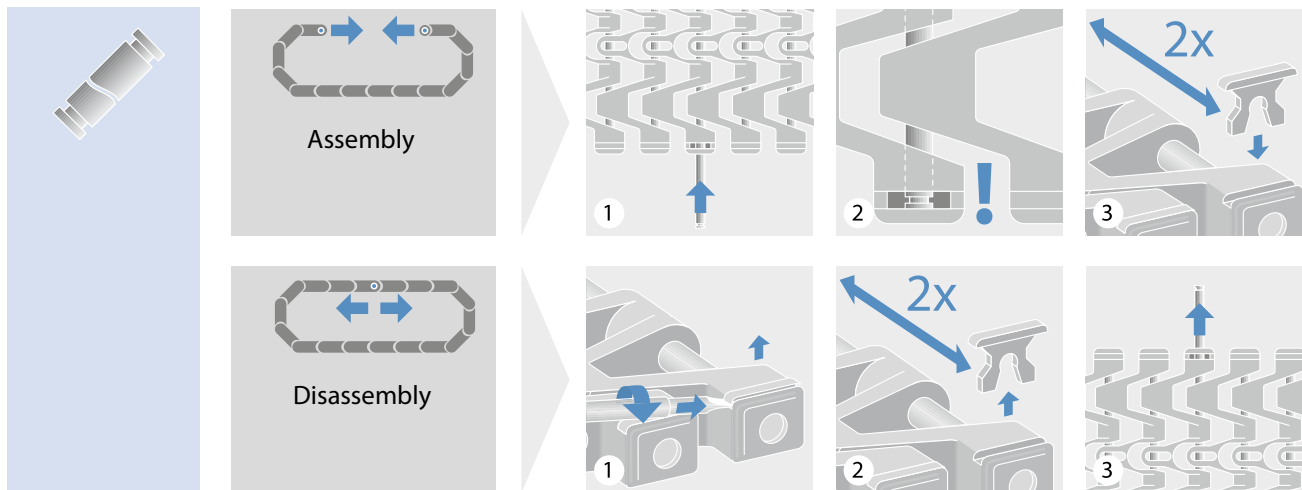

## Combo belts (S5 ST and S11)

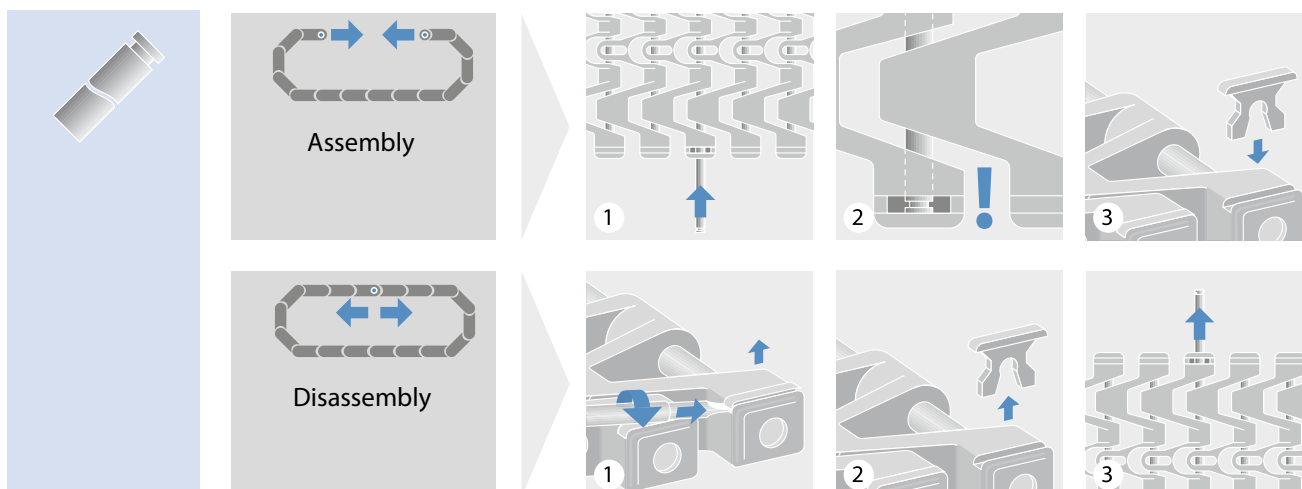


## Series 6.1, 10

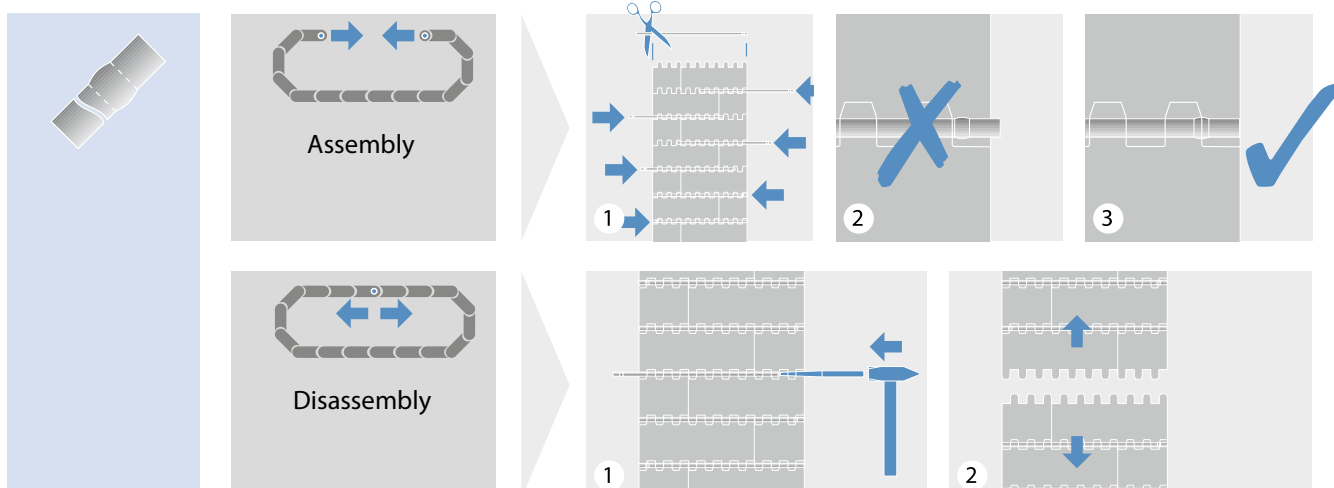


# 5.4 JOINING BELT SECTIONS

## Series 7

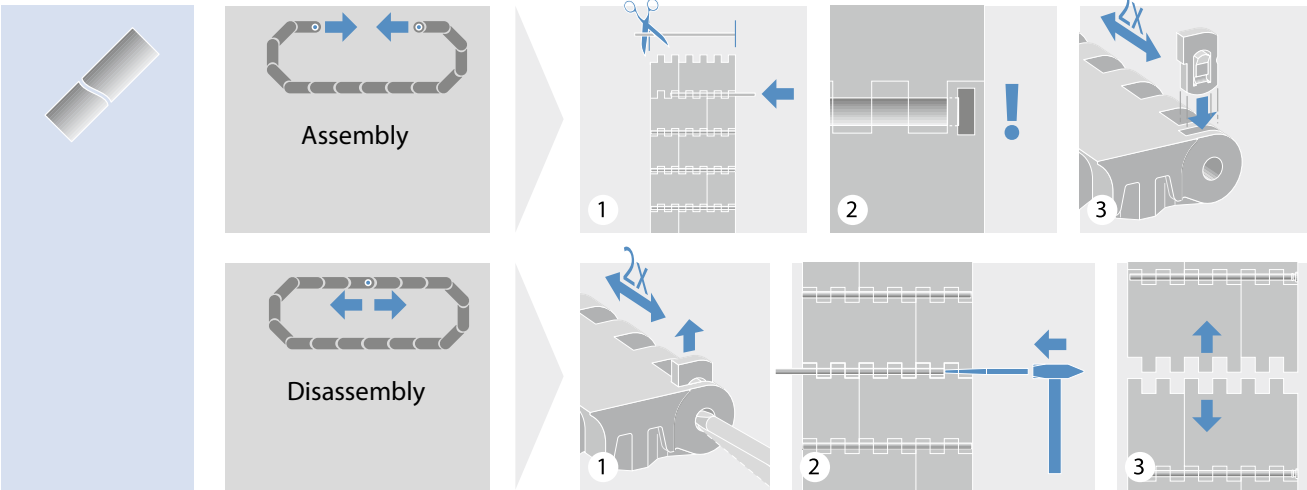


## Series 9

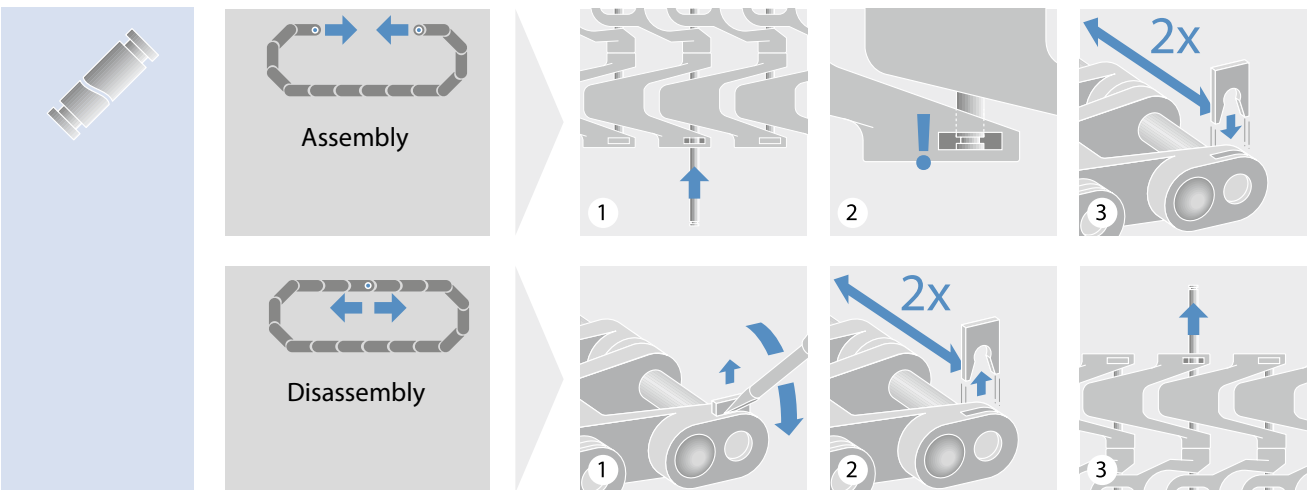




## Series 9.1

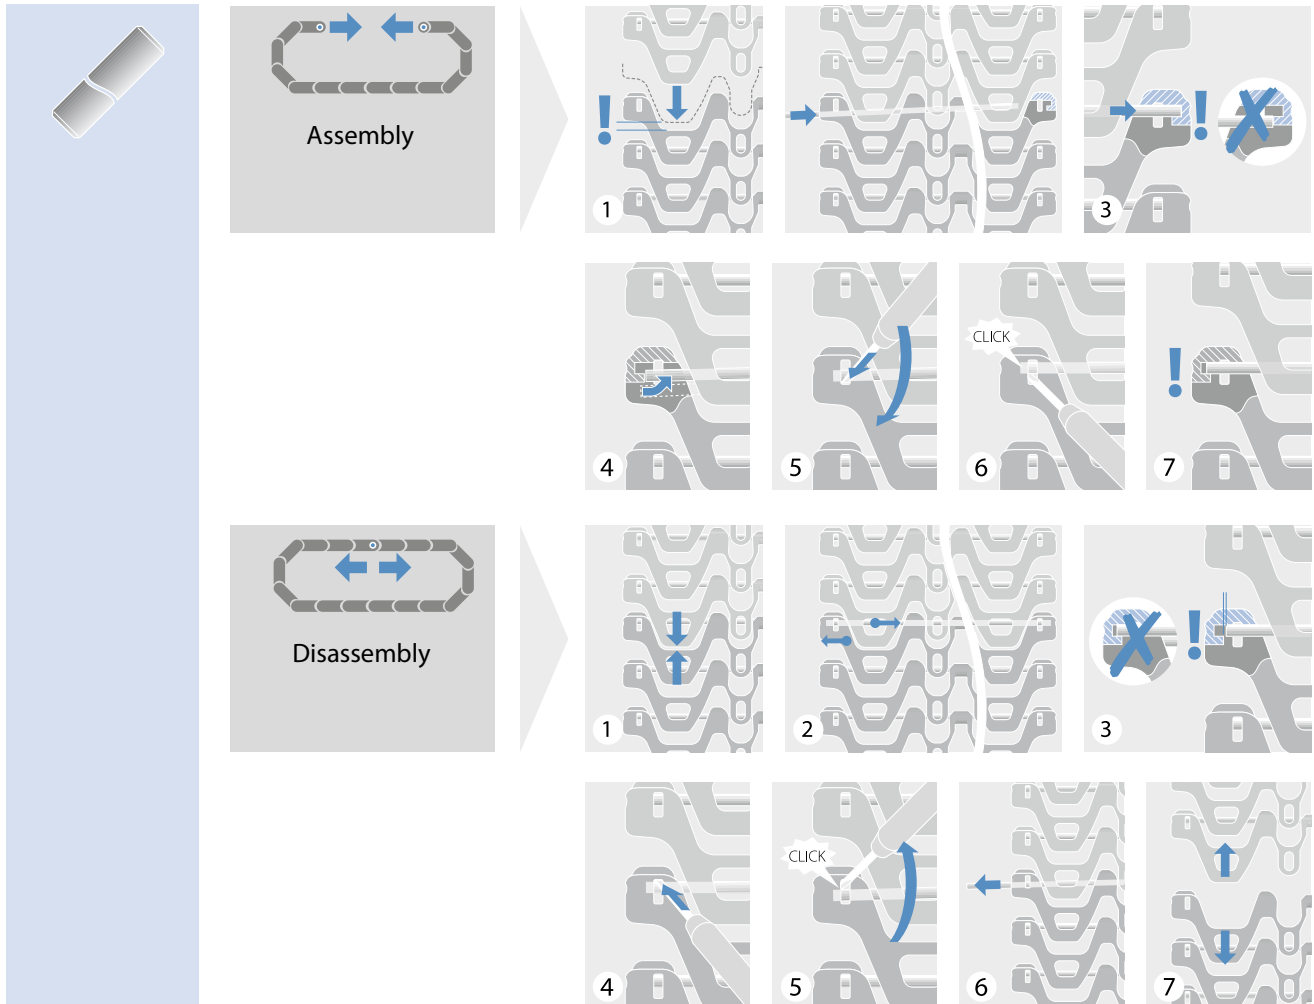


## Series 11

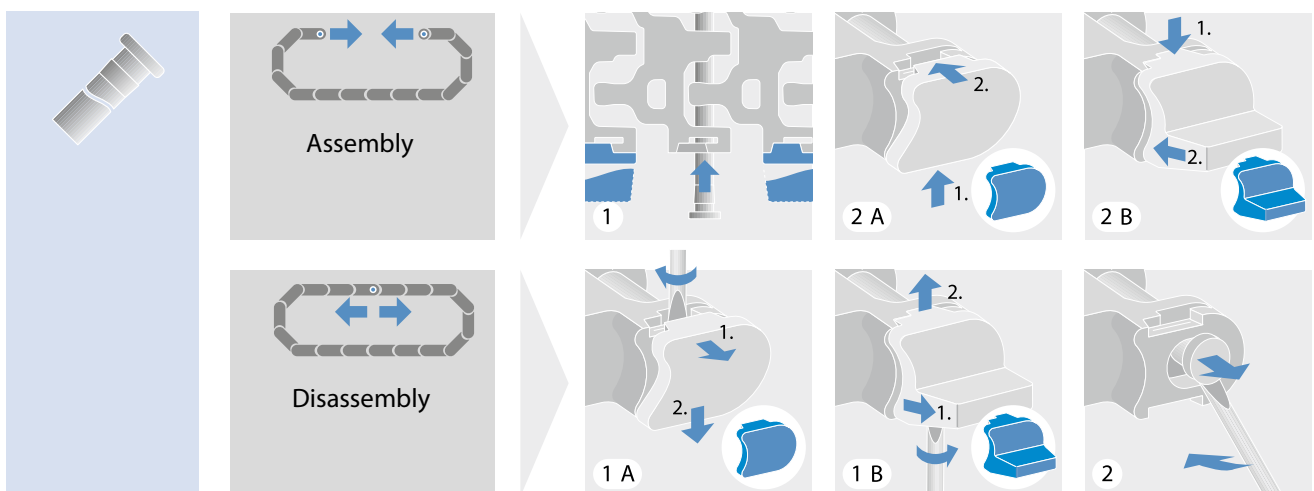


# 5.4 JOINING BELT SECTIONS


## Series 13

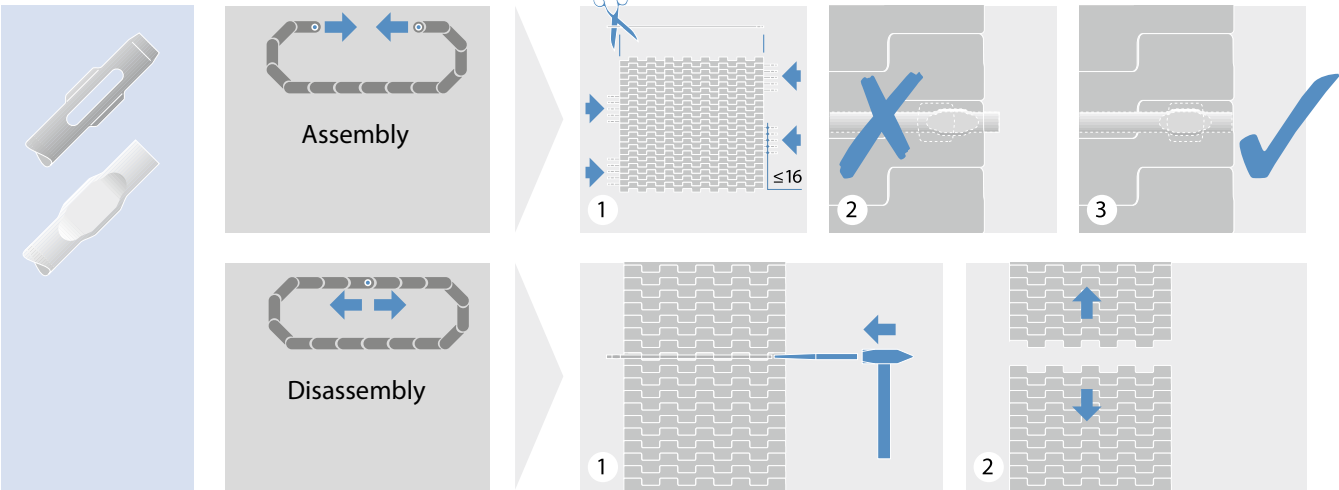


## Series 14, 15

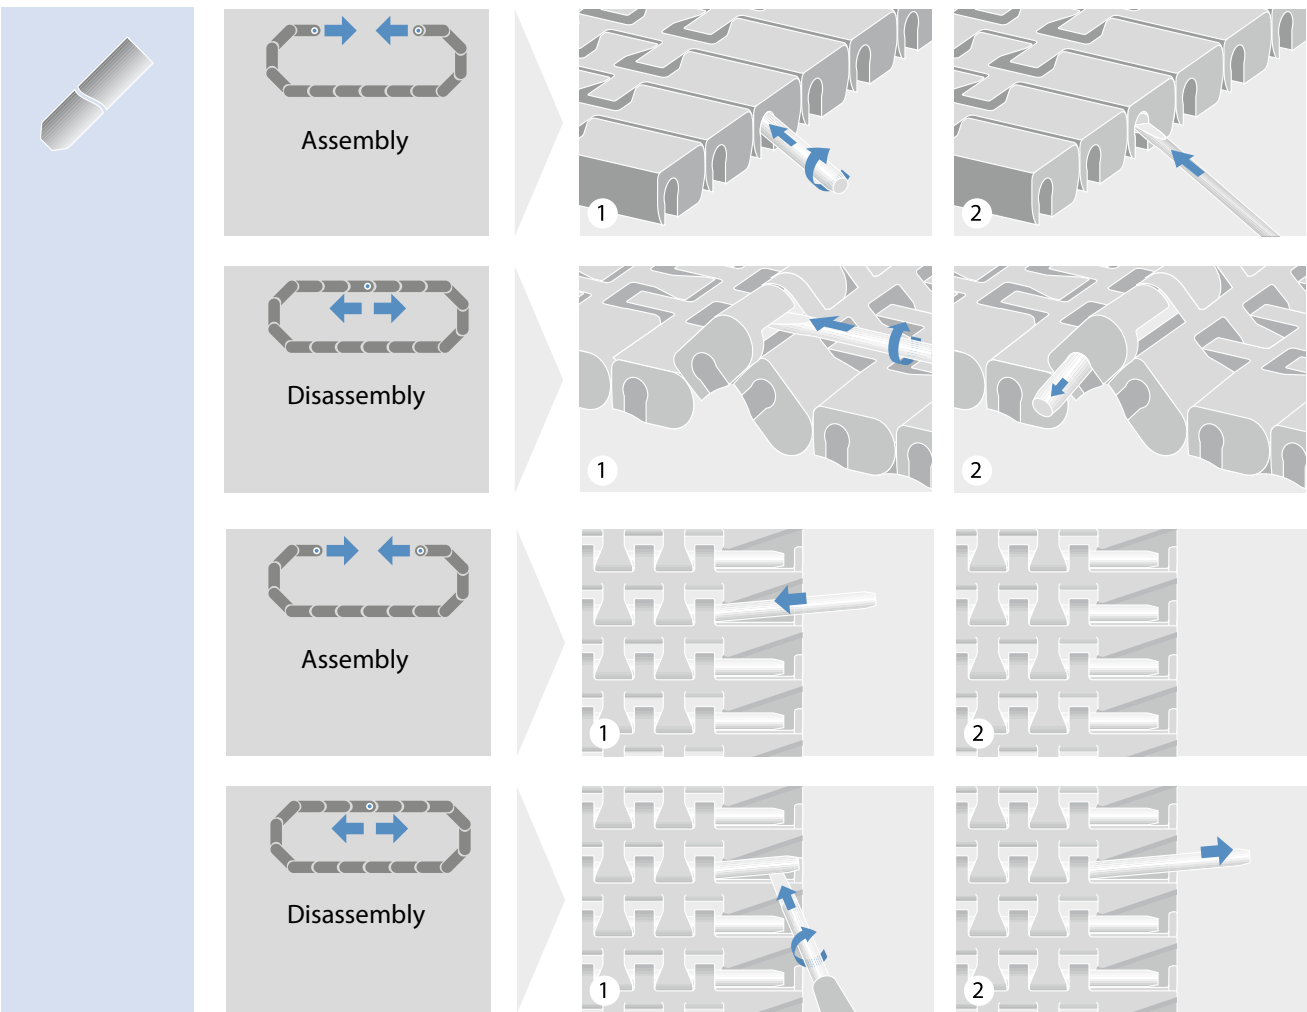

## Series 17

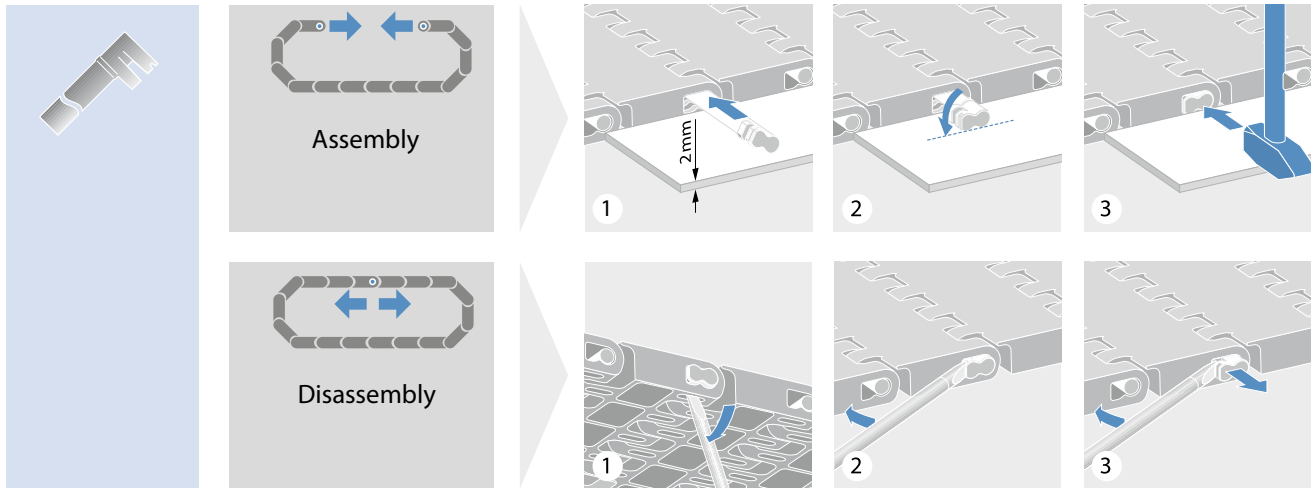


## Series 18

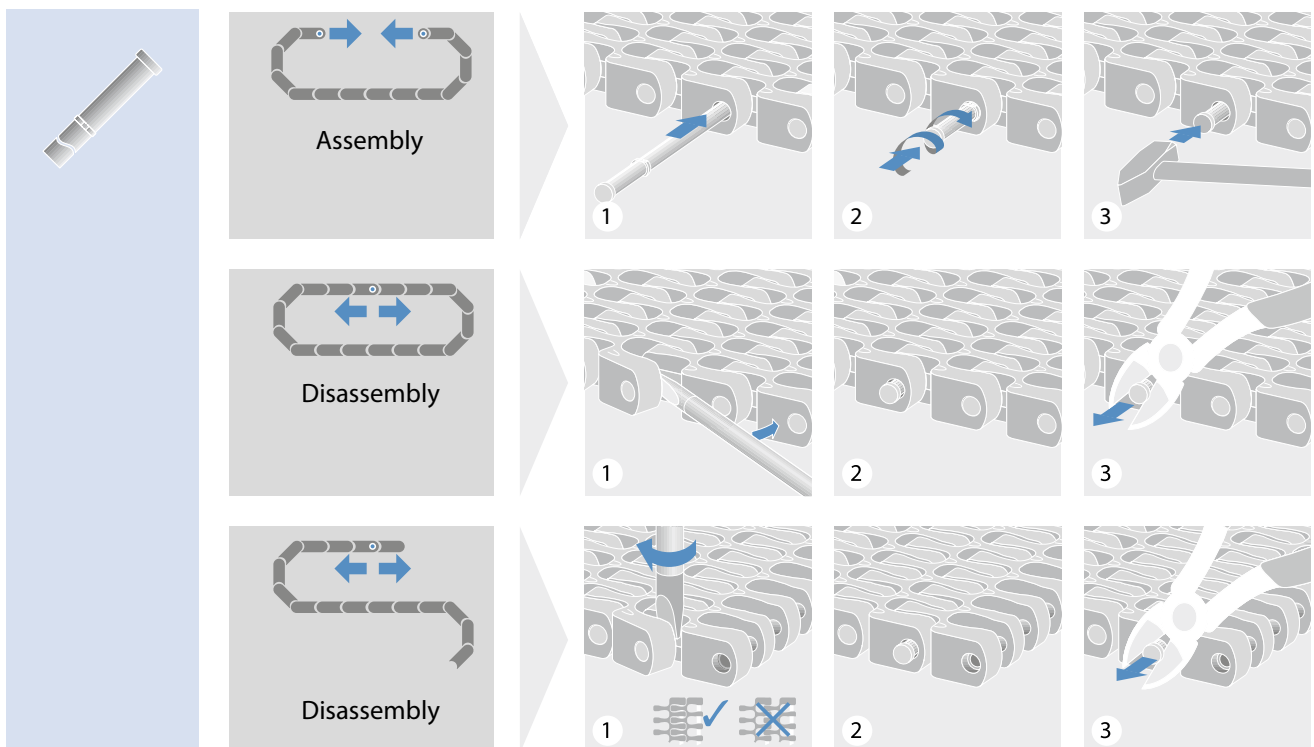


# 5.4 JOINING BELT SECTIONS


## Series 4.1 ProSnap (PSP)

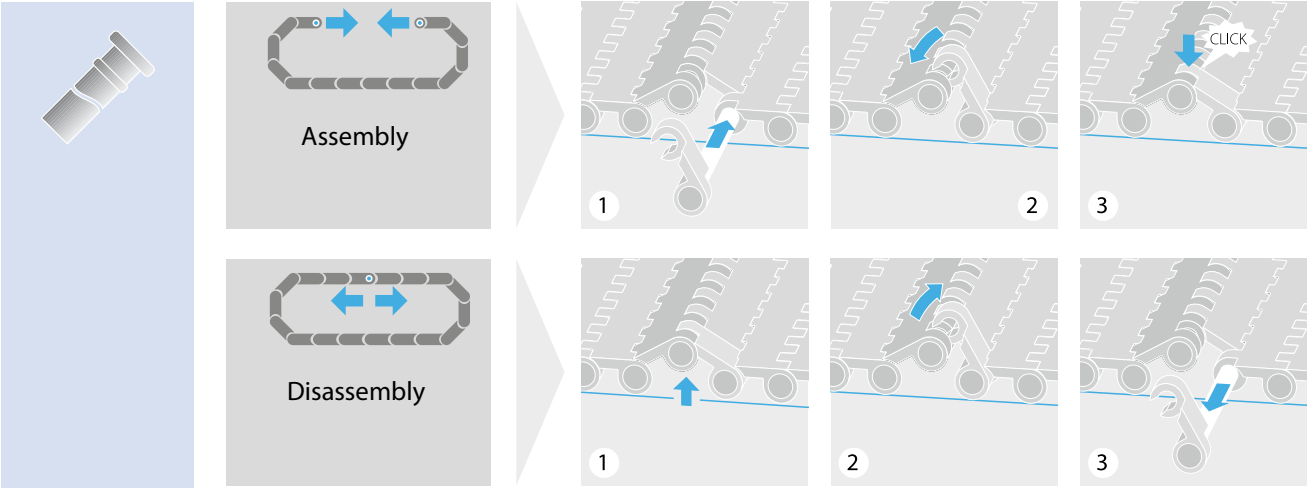


## Series 6.1, 10 ProSnap (PSP)

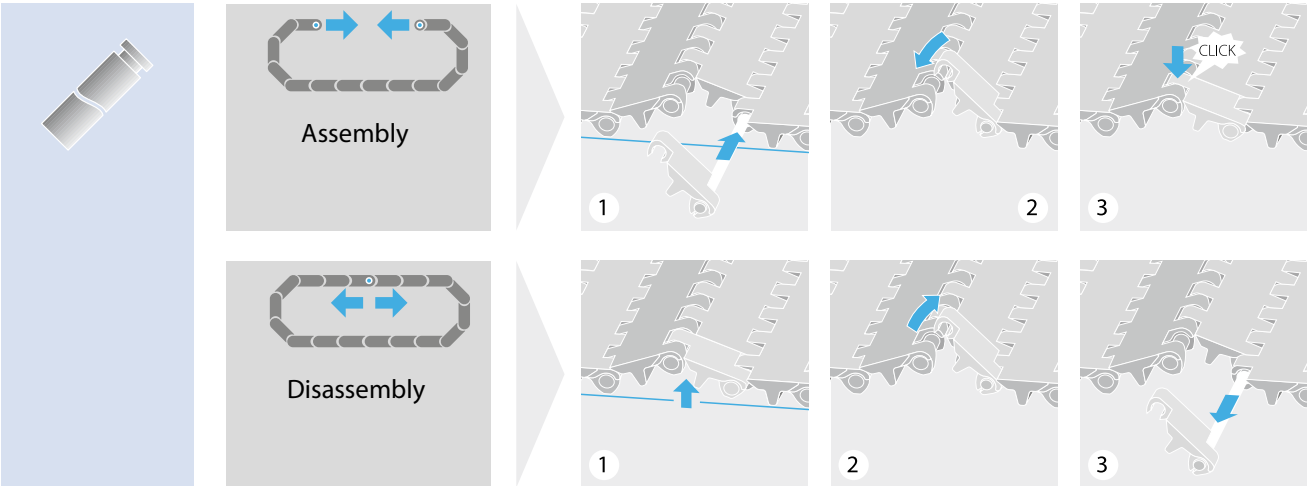


## Series 13 ProSnap (PSP)

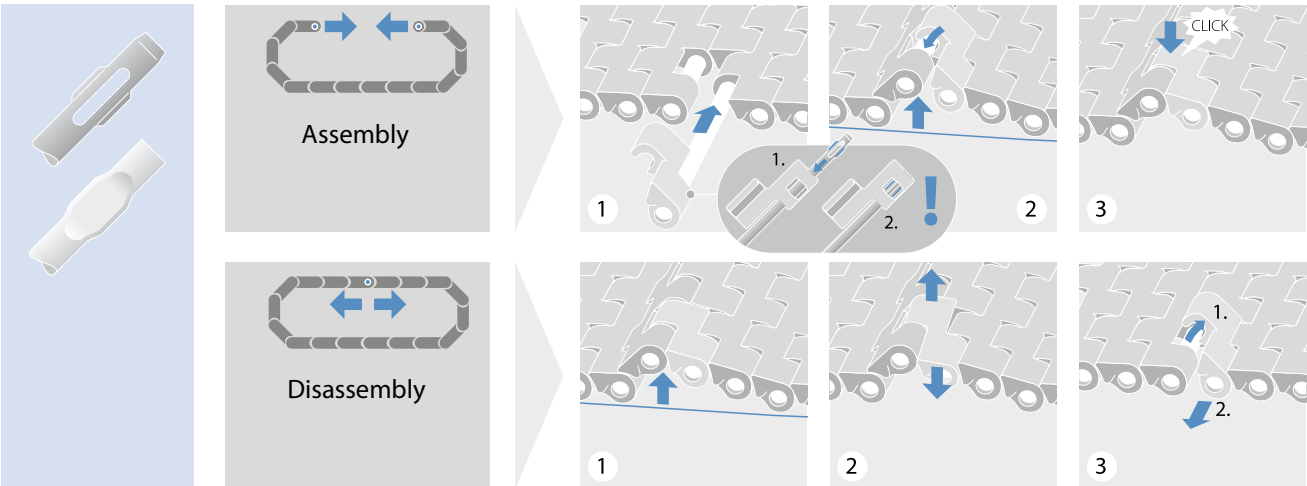

## Small plugs (HR) for extruded or steel pins (Series 4.1 and 8)

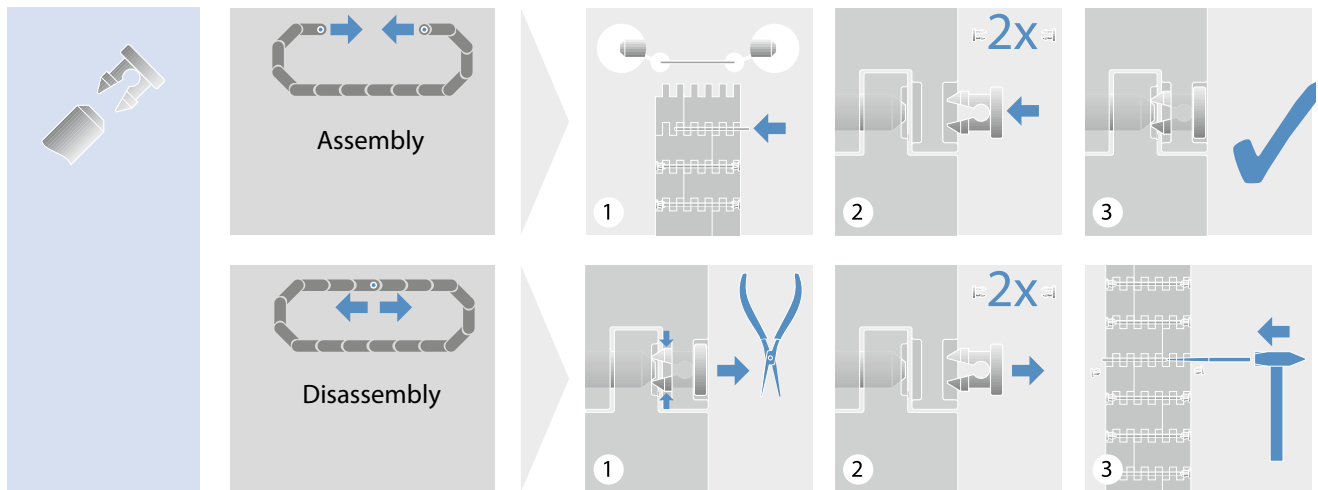


## Small plugs (HR2) for extruded or steel pins (Series 6.1 and 10)

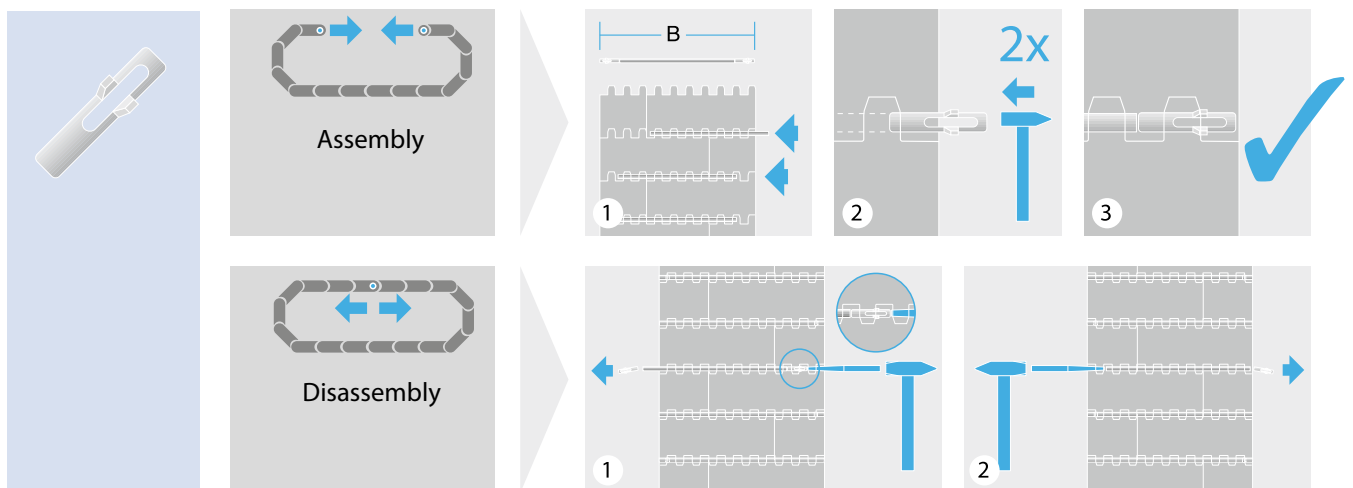


## 5.4 JOINING BELT SECTIONS

### Belts with more than one pin

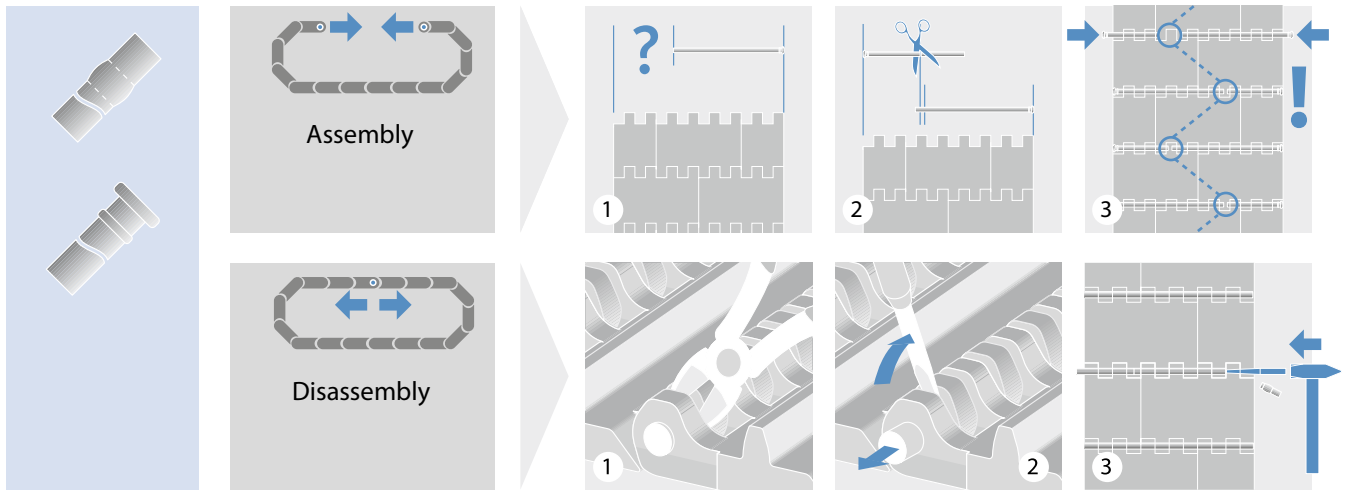

### Alternativ options for belts with more than one pin per hinge Series 4.1, 6.1, 8, 10, 13

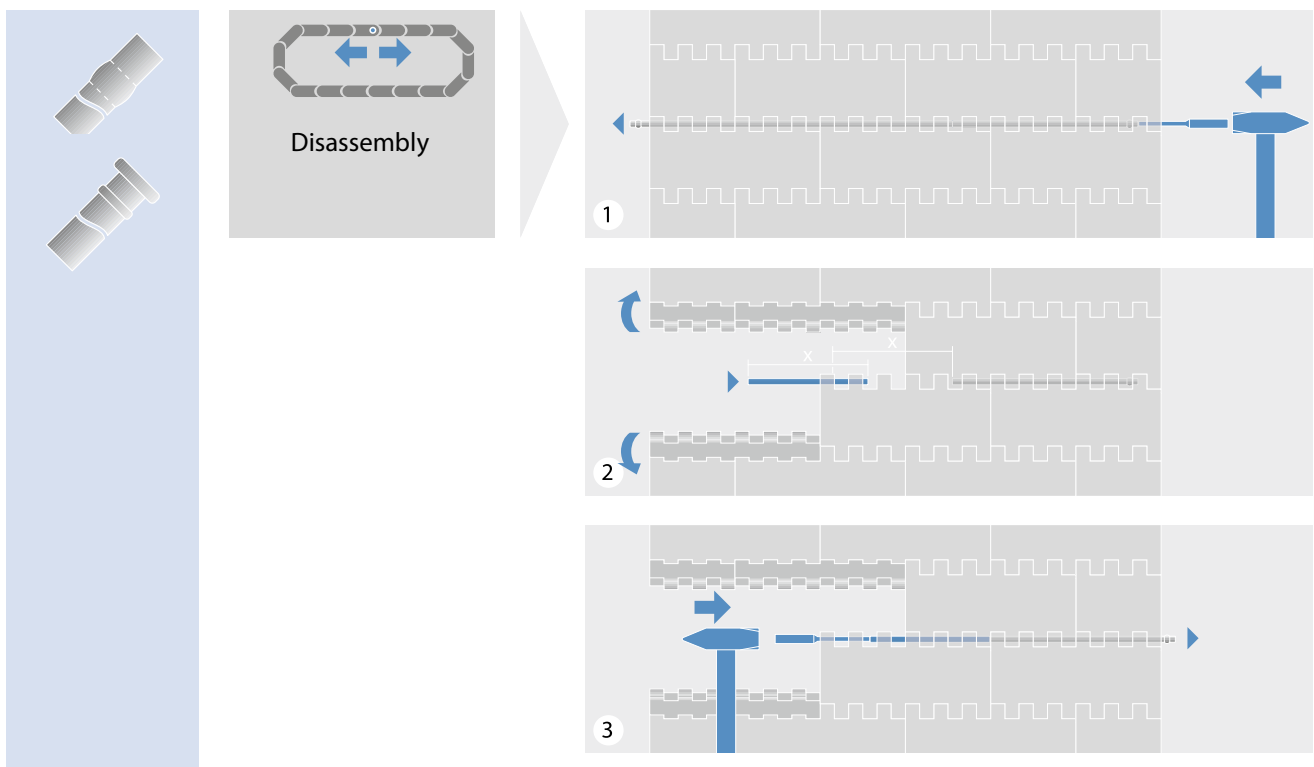

# 5.5 INSTALLING A MODULAR BELT

## Installation

- Lay the belt/belt sections flat on the wearstrips on the conveyor frame. Join belt sections using the hinge pins included with the shipment (1–4). Avoid impact to belt and sprockets during installation.



1 Move both belt ends until they interlink correctly



2 Insert rod




3 Gently tap its head into retaining position




4 Cut protruding rod end slightly behind belt edge

- Make sure the belt is not under tension when joining belt sections and ensure correct sprocket engagement when pulling the belt around drive and idler sprockets (5).
- If applicable, ensure correct belt length by allowing an appropriate amount of catenary sag between snub rollers and support rollers (5).
- Ensure correct running direction when installing a belt with side guard or profiles (6).
- Always follow the conveyor manufacturers operating instructions when operating the conveyor and the belt.

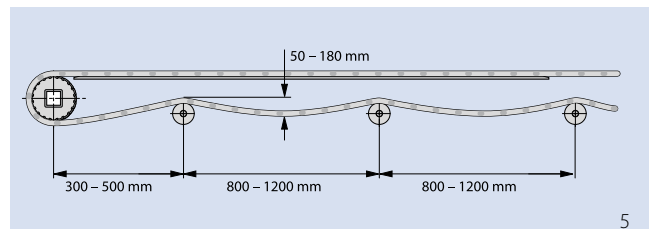

5

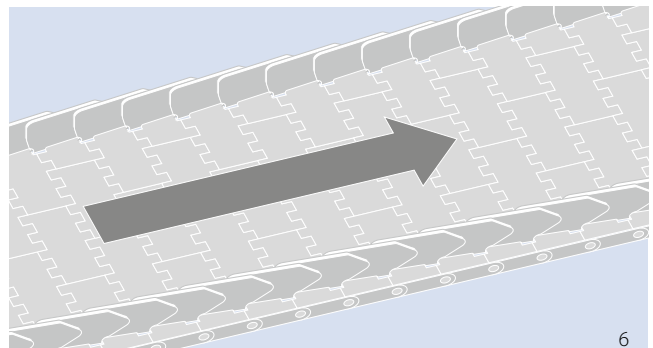

6

## 5.6 MAINTENANCE AND REPAIR

- All modular belts stretch as they break in during the first few weeks of operation. This is normal and should be expected. Depending on the belt load and operating environment, additional belt stretching is common.
- After the initial break-in period, the belt will probably have to be shortened. This can be accomplished by adjusting the take-up mechanism, if there is one, or by removing one or more row(s) of belting.
- If the belt has more than one module across the width, verify the integrity of the belt bricklaying pattern after removing the excess belt length. If the pattern is compromised, remove one additional row of belting or reinsert a row.
- Ensure an appropriate amount of catenary sag on the returnway after shortening the belt.
- Inspect the belt regularly to make sure it is operating properly. The frequency of the inspections depends on the general operating conditions, e.g. load, speed, abrasiveness of the application, cleaning intervals, operating temperature, etc.
  - Inspect sprockets for wear and alignment.
  - Check that the belt is tracking properly.
  - Inspect belt modules, profiles and side guards for damage and wear.
  - Inspect the belt for protruding hinge pins.
  - Inspect the conveyor for loose wearstrips/belt supports.

Broken or worn parts must be replaced immediately to ensure problem-free operation.

Do not mix new and used sprockets at the same shaft. To ensure the optimum performance and wear life, Forbo recommends changing the sprockets and the belts at the same time.



## 5.7 CLEANING

- Regular cleaning is highly recommended. Cleaning reduces the overall wear of the belt, sprockets and hinge pins and increases belt life. The specific cleaning intervals depend on the application and the operating environment.
- Optimal cleaning solutions and methods depend on the specific application and industry requirements. The food processing industry has exceedingly stringent hygiene and sanitation requirements, such as HACCP, and increasingly follows sanitation benchmarks set by the Global Food Safety Initiative. Adhering to the applicable sanitation standards is the responsibility of the user.
- Belt materials are often selected based on application requirements, e.g. abrasion resistance, load and operating temperature. However, different materials have different levels of chemical resistance (please see chapter 2.1 "Plastic materials (Properties)" for the relative chemical resistance of standard belt materials against commonly used chemicals).
- Verify that the cleaning agent is suitable for the specific belt material prior to cleaning.
  - If in doubt about the suitability of the cleaning solution, please consult the supplier of the cleaning solution.
  - When using hot water for cleaning, do not exceed the maximum temperature allowed for the belt material.
  - Never exceed the recommended chemical concentration or the exposure time of the cleaning solution. High chemical concentrations, and high chlorine concentrations in particular, will degrade plastic materials prematurely.
  - Always rinse the belt thoroughly with water after cleaning.

## 5.8 PREVENTIVE MAINTENANCE AND TROUBLESHOOTING

### The belt is not tracking properly; the belt edges touch the frame

Sprockets are not aligned	If the total number of teeth of a sprocket with a square bore is not divisible by 4, the sprockets must be "timed" by aligning the teeth.
Sprockets on the drive and/or idler shafts are misaligned; the locked center sprocket on either shaft is incorrectly positioned or loose	The center sprocket on the drive and idler shafts must be aligned, positioned in the center of the shaft and engage the belt. Check the retaining devices to ensure the center sprockets are securely fastened on the shafts.
Conveyor frame is not level and square	Check and adjust if necessary.
Drive and idler shafts are not level and/or square with each other	Check and adjust if necessary.
Two or more belt sections are misaligned and joined incorrectly, i.e. the belt edges are not straight	Inspect belt for unevenly joined belt sections; realign the belt section(s).

### Sprockets do not engage correctly or sufficiently

Incorrect "A" dimension and/or too large a gap between sprockets and end of wearstrips	Adjust the position of the shaft(s) to attain the recommended dimensions.
Sprockets are not aligned	<p>If the total number of teeth of a sprocket with a square bore is not divisible by 4, the sprockets must be "timed" by aligning the teeth.</p> <p>Check if the axial position of the sprockets are aligned to the engagement points of the belt. Check if the sprockets can freely move sideways on the shaft.</p>
Insufficient belt tension	Make sure there is sufficient catenary sag to provide back tension. This can be ensured by using a weighted roller (see chapter 3.3)
Not enough belt wraps around the sprockets	The recommended belt wrap around the sprocket is between 180° and a minimum of 150°. To ensure a 180° wrap, install a snub roller or move the existing snub roller.

## Excessive sprocket wear

Abrasive conditions	Improve cleaning methods and frequency or add protective shields to reduce the amount of abrasive material coming into contact with the belt and sprockets. Use TPC1 sprockets or stainless steel sprockets.
Not enough sprockets	Verify that the recommended minimum number of sprockets is used. Too few sprockets will cause premature sprocket wear. Add sprockets if necessary.
Sprockets are not aligned	If the total number of teeth of a sprocket with a square bore is not divisible by 4, the sprockets must be "timed" by aligning the teeth.
Incorrect "A" dimension and/or too large a gap between sprocket and end of wearstrips	Adjust the position of the shaft(s) to attain the recommended dimensions.
Sprockets on the drive and/or idler shaft are misaligned; the locked center sprocket on either shaft is incorrectly positioned or is loose	The center sprocket on the drive and idler shafts must be aligned, positioned in the center of the shafts and engage the belt. Check the retaining devices to ensure the center sprockets are securely fastened on the shafts.
High belt speed	High belt speed will increase sprocket wear, especially on conveyors with a short center distance. Reduce speed if possible.
High belt tension	High belt tension will increase sprocket wear. Make sure there is an appropriate amount of catenary sag.

## Excessive belt wear

Abrasive conditions	Improve cleaning methods and frequency or add protective shields to reduce the amount of abrasive material coming in contact with belt and sprockets. Use TPC1 sprockets or stainless steel sprockets.
Incorrect belt material	Check material specifications to ensure the optimal material is used (see also chapter 2.1, belt material orientation chart). Contact your Forbo Movement Systems sales representative for a recommendation.
Incorrect wearstrip material	Check material specifications to ensure the optimal material is used. Contact your Forbo Movement Systems sales representative for a recommendation.
Incorrect wearstrip arrangement	Check the wearstrips are placed according to design guidelines. Contact your Forbo Movement Systems sales representative for recommendations.
Product loading	If wear occur where product is loaded onto the belt, reduce the distance between the product and the belt if possible.
High belt speed	High belt speed will increase wear, especially on conveyors with a short center distance. Reduce belt speed if possible.

## 5.8 PREVENTIVE MAINTENANCE AND TROUBLESHOOTING

### Belt stretching; excessive catenary sag

Abrasive conditions	Improve cleaning methods and frequency or add protective shields to reduce the amount of abrasive material coming in contact with belt and sprockets. Use TPC1 sprockets or stainless steel sprockets.
Incorrect belt tension	Adjust tension by adding or reducing catenary sag.
Incorrect belt or hinge pin material	Check belt and hinge pin material used. Contact your Forbo Movement Systems sales representative to confirm the correct material for the application.
Varying operating temperature	Varying operating temperatures can cause the belt to elongate and/or contract significantly. Verify that the catenary sag can accommodate the elongation/contraction. It may be necessary to install a gravity take-up or a pneumatic tensioning device.

### Hinge pins are migrating out of the belt

Pins are not properly locked	Check if pin heads, locking collars, clips or belt edge modules are damaged. Replace if necessary.
Pins elongate due temperature	Select appropriate pin material with in consultation with Forbo Movement Systems. Shorten pins and reinstall/replace with new, shorter pins.
Pins elongate due to high load	High transverse forces on pin. Conveyor frame is not level and square. Check frame and adjust accordingly.
Pins do not lock correctly and are too loose or too tight.	Verify the pins are of the correct type.
Pins cannot be easily extracted	In abrasive applications "camshafting" can occur (uneven lateral wear of the hinge pins). This can make it difficult to extract the hinge pins, particularly in wide belts. Cut off the hinge pin locking collar and carefully knock out the hinge pin from one side, using a suitable steel pin and a hammer.





# 6 APPENDIX

- 6.1 Glossary
- 6.2 Glossary of symbols
- 6.3 Additional tables
- 6.4 Conversion table metric/imperial
- 6.5 Questionnaire
- 6.6 Notes
- 6.7 Legal notes

# 6.1 GLOSSARY

## A

Term	Explanation
Accumulation length	Length of product accumulation in running direction of the belt. Also known as "Back-up length"
Adjusted belt pull	Effective belt pull which is adjusted by taking into account the operational factor
Admissible belt pull	Actual allowable belt pull after weakening effects like temperature are taken into account in the nominal belt strength

## B

Back flex	Opposite of front flex. Negative bending of the belt.
Backed up product load	The load (product weight) accumulating on top of the belt
Back-up length	Length of product accumulation in running direction of the belt. Also referred to as "Accumulation length"
Belt width	Shortest distance between belt edges
Bi-directional drive	Drive system with a motor on each side allowing the conveyor to run in both directions
Brick-laid pattern	Belt modules are staggered from row to row like bricks in a wall. This is to avoid cross joints.

## C

Carryway	Transport side of the belt.
Catenary sag	Unsupported part of belt which provides tensioning of the belt
CCW	Abbreviation for counter-clockwise
Center drive	Or Omega drive. A conveyor with the drive shaft located below the conveyor on the return path with the belt wrapping around the sprocket like an upside-down $\Omega$ .
Chordal action	See "Polygon effect"
Coefficient of friction	Ratio between the force required to move two sliding surfaces over each other, divided by the force pressing them together
Coef. of friction Belt – Curve	Defines the resistance to sliding between the belt and the radius wearstrip exposed to the radial force in a curve. This is normally between the inner wearstrip and the belt edge
Coef. of friction Belt – Product	Defines the resistance to products sliding on the belt surface. Mainly relevant for load calculation on accumulating conveyor
Coef. of friction Belt – Slider	Defines the resistance to sliding between the conveyor bed (slider) and the bottom side of the belt
Coefficient of thermal expansion	Coefficient used to calculate the change in dimensions due to a temperature change
Collapse factor	Defines the minimum inside radius a side flexing PMB is capable of as a function of the belt width
Conveyed load	Total weight of product conveyed on the belt
Conveying length	Center to center distance (C – C), measured from conveyor head to tail at center of the drive/idler shaft



Term	Explanation
CW	Abbreviation for clockwise
<b>D</b> Decline conveyor	Lowerator. A (section of) conveyor lowering products from a higher level to a lower level
<b>E</b> Effective belt pull	Belt pull calculated by taking weight of belt, product and friction forces into consideration
Elevation	The vertical change in altitude for an incline conveyor
EU	Material complies with standards for food contact articles in at least one member state of the European Union
<b>F</b> FDA	Food and Drug Administration. Federal US agency which regulates materials that may come in contact with food
Finger plates	Special transferplate used only for raised rib belts. It ensures smooth product transfers.
Flat top belt	Standard belt with a flat smooth surface
<b>G</b> Gravity take-up	System which uses a weighted roller (->gravity) to tension the belt
Grid top	Mesh or web like surface structure with a very large open area (> 40 %)
<b>H</b> Hold Down Tab	Special modules which can be inserted into the middle of the belt to hold it down in back-flexing sections
<b>I</b> Idling shaft	The shaft of a conveyor that is not driven (most tail shafts)
Incline conveyor	A (section of) conveyor lifting products up an incline
Indent	Distance of width from the belt edge to beginning of a structure (e.g. side guard, profile, etc.)
<b>L</b> Lower head drive	Conveyor with lowered drive shaft to reduce the transfer gap
<b>N</b> Nominal belt pull	Maximum theoretical belt pull under ideal conditions
NSF International	NSF International is a product testing, inspection and certification organization based in Ann Arbor, Michigan
<b>O</b> Omega drive	See "Center drive"
Open hinge	Hinges that are easy to clean
Opening	Percent open area of a belt's surface
Operational factor	Operational factor is used to calculate adjusted belt pull from effective belt pull
<b>P</b> Pitch	Distance between pins
Pitch diameter	Effective diameter of a sprocket

## 6.1 GLOSSARY

Term	Explanation
PMB	Plastic Modular Belt
Polygon effect	Also referred to as “chordal action”. An impression of the variation in linear belt speed cause by the sprocket not forming a true arc but a polygon.
Profile	Profile modules have a molded vertical plate used to elevate products on incline conveyors.
Pusher drive	Tail driven conveyor
PV limit	A value defined for two mating materials which expresses the pressure (P) and velocity(V) limitations when materials side against each other
S	
Screw-operated take-up	Rigid pre-tensioning system using screws
Side flexing belt	Belt with the ability to side flex allowing it to run in curves. May also be referred to as radius conveyors/belts.
Side guards	Small plates that are assembled close to belt edge to prevent product falling from the belt edge
Slider bed	Fully closed plate supporting the belt (may have holes or gaps to allow dirt or debris to escape)
Slider support	See “wearstrip”
Spiral conveyor	Belt helically wrapped around a drum.
Sprocket	Wheel with teeth that engages with the modules of a belt to provide positive torque transmission
Structure	Parts of a module or belt which provide specific attributes.
T	
Take-up	Belt tensioning device
Temperature expansion coefficient	Coefficient of thermal expansion is used to calculate the change in dimensions due to temperature changes
Temperature factor, $c_T$	Polymers (plastic) get softer with increasing temperature. The temperature factor will reduce the belt pull capacity with increasing temperature depending on belt material.
Thermal expansion	Temperature dependent change in dimension (+ or –) caused by the material's temperature expansion coefficient
Total belt length	Actual belt length necessary to wrap around the conveyor
U	
USDA	United States Department of Agriculture. US federal agency which has defined requirements for equipment which may be in contact with meat and poultry or dairy. Compliance verification for PMB is managed by NSF International
V	
V-shape arrangement	Belt wearstrips arranged in V-shape or “chevron”
W	
Wearstrip	Plastic strips on which the belt runs or is guided.

## 6.2 GLOSSARY OF SYMBOLS

	Designation	Symbols	Metric	Imperial
Forces	Effective belt pull	$F_U$	N	lb
	Adjusted belt pull	$F_{adj}$	N	lb
	Adjusted belt pull per mm/ft belt width	$F'_{adj}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
	Admissible belt pull	$F_{adm}$	N	lb
	Admissible belt pull per mm/ft belt width	$F'_{adm}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
	Nominal belt pull per mm/ft belt width	$F'_{nom}$	$\frac{N}{mm}$	$\frac{lb}{ft}$
	Nominal belt pull in curve	$F_{nom, curve}$	N	lb
	Shaft load	$F_S$	N	lb
Factors & coefficients	Coefficient of friction belt to accumulated products	$\mu_{acc}$	–	–
	Coefficient of friction belt to slider	$\mu_s$	–	–
	Coefficient of friction belt to curve side support	$\mu_c$	–	–
	Coefficient of thermal expansion	$\alpha$	$\frac{mm}{m \cdot K}$	$\frac{in}{m \cdot ^\circ F}$
	Operational factor	$C_{Op}$	–	–
	Temperature factor	$C_T$	–	–
	Collapse factor	$C_C$	–	–
	Conversational factor	$g$	9.81 m/s <sup>2</sup>	1
Conveyor dimensions	Conveyor length/Center to center distance	$l_{c-c}$	m	ft
	Elevation of conveyor	$h_e$	m	ft
	Angle of incline/decline	$\alpha_i$	°	°
	Angle of curve	$\alpha_c$	°	°
	Accumulation length	$l_{acc}$	mm	in
	Mass of conveyed product	$m_p$	kg	lb
	Mass of accumulated products	$m_{acc}$	kg	lb
	Mass of entire belt in conveyor	$m_B$	kg	lb

## 6.2 GLOSSARY OF SYMBOLS

	Designation	Symbols	Metric	Imperial
Belt dimensions	Mass of belt (see data sheet)	$m'_B$	$\frac{\text{kg}}{\text{m}^2}$	$\frac{\text{lb}}{\text{ft}^2}$
	Belt speed	$v$	$\frac{\text{m}}{\text{min}}$	$\frac{\text{ft}}{\text{min}}$
	Belt length	$l_B$	mm	in
	Belt width	$W_B$	mm	in
	Width deviation	$W_{\text{dev}}$	%	%
	Minimum belt width	$W_{\text{min}}$	mm	in
	Effective belt width	$W_{b,\text{eff}}$	mm	in
	Width increment	$W_{\text{inc}}$	mm	in
	Width tolerance	$W_{\text{tol}}$	%	%
	Belt pitch	$p$	mm	in
	Pin diameter	$d_{\text{pin}}$	mm	in
	Height of pin bore position	$h_{\text{pin}}$	mm	in
	Module thickness	$h_m$	mm	in
	Inner side flex radius	$r1$	mm	in
	Front flex radius on rollers	$r2$	mm	in
	Back flex radius on load bearing rollers	$r3$	mm	in
Structure dimensions	Back flex radius on Hold Down shoes	$r4$	mm	in
	Back flex radius on rollers	$r5$	mm	in
	Structure height (e.g. FRT, roller above surface, etc.)	$h_s$	mm	in
	Structure width	$w$	mm	in
	Indent of structures (profiles, FRT, roller tops, PRR cut-out)	$a$	mm	in
	Distance between structures across belt width (profiles, FRT, roller)	$b$	mm	in
	Structure (roller) distance increment	$b_{\text{inc}}$	mm	in
	Spacing between structures in travel direction (profiles, FRT, roller)	$s$	mm	in
	Roller diameter	$d_{\text{rol}}$	mm	in
	Number of rollers across belt width	$n_{\text{rol}}$	–	–

	Designation	Symbols	Metric	Imperial
Shaft & Drive dimensions	Calculated motor power	$P_M$	kW	hp
	Power requirement at drive shaft	$P_S$	kW	hp
	Torque	$M$	Nm	ft · lb
	Shaft revolutions	$R_s$	rpm	rpm
	Mass of shaft	$m_s$	kg	lb
	Shaft deflection	$y_s$	mm	in
	Shaft length	$l_s$	mm	in
	Shaft diameter	$d_s$	mm	in
	Shaft edge length (square and hexagon)	$W_s$	mm	in
	Shaft wall thickness of hollow shafts	$t_s$	mm	in
	Width of keyway	$W_K$	mm	in
	Diameter + keyway height	$d_K$	mm	in
	Height of keyway	$h_K$	mm	in
	Bearing center distance	$l_b$	mm	in
	Torsion angle	$\phi$	°	°
	Modulus of elasticity	$E$	$\frac{N}{mm^2}$	$\frac{lb}{in^2}$
	Geometrical moment of inertia	$I$	$mm^4$	$in^4$
Sprocket dimensions	Axis to wearstrip top	$A$	mm	in
	Axis to belt top	$B$	mm	in
	Axis to conveyor frame	$C_{min}$	mm	in
	Sprocket pitch diameter	$D_0$	mm	in
	Sprocket width	$W_{spr}$	mm	in
	Number of sprockets	$n_{spr}$	–	–
	Temperature	$T$	°C	°F

# 6.3 ADDITIONAL TABLES

## Speed Limit Curve Belts

### Admissible belt speed


The belt speed always refers to the speed when running straight. Due to the nature of a side flexing belt this will also be the speed of the belt at the outer radius of the curve. The speed on the inside radius of the belt depends on the collapse factor. The smaller the collapse factor the higher the speed reduction on the inside radius. As a result there is a relationship between the collapse factor and the admissible belt speed.

The key criteria limiting the admissible belt speed is belt and wearstrip temperature. With increased speed and/or increased belt load, the temperature on the inner belt edge and the inner curve wearstrip will increase. This will lead to accelerated wear, potential dust and eventually the belt edge and/or wearstrip melting.

Thin wearstrips with good heat transmission to a steel support structure will increase the admissible belt pull. On the other hand a large solid machined wearstrip will have more problems transmitting the heat generated from the friction between the belt and wearstrip. This will lead to a temperature increase.

Lower friction between the belt and wearstrip will lead to a higher admissible belt speed and the material combination (belt edge and wearstrip) will also have a strong impact on the admissible belt speed. Soft materials like PP with relatively high friction coefficients will offer a relatively low admissible belt speed before significant wear and dust occurs.

The following chart shows the correlation between admissible belt pull and maximum belt speed for POM belts running on high quality wearstrips of medium thickness under clean conditions:

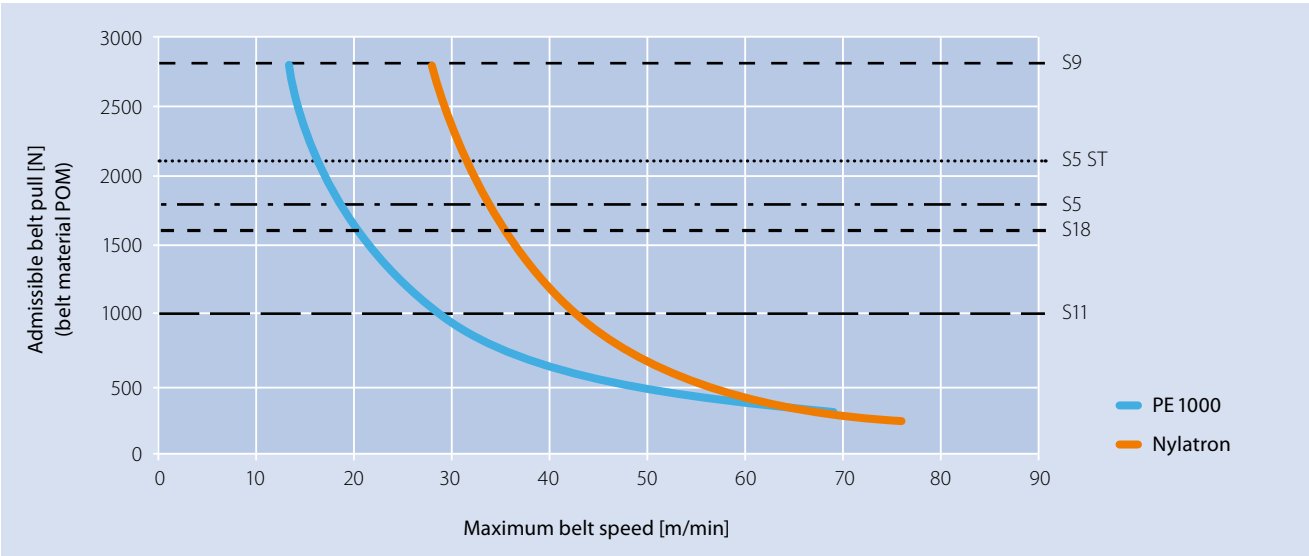


### Attention:

In the case of Siegling Prolink Series 11 and Combo belts (a combination of Siegling Prolink Series 5 ST and Siegling Prolink Series 11) different dimensions and characteristics must be taken into account.


### Admissible belt speed Series 11

Series 11 has been developed with special caps on the belt side, meaning that the material combination on this critical part of a side-flexing belt can be optimized.

For the standard Series 11 belts, the caps or HD on the belt edge are made of POM. For these we recommend using wearstrips in UHMW PE, also known as PEHD1000.

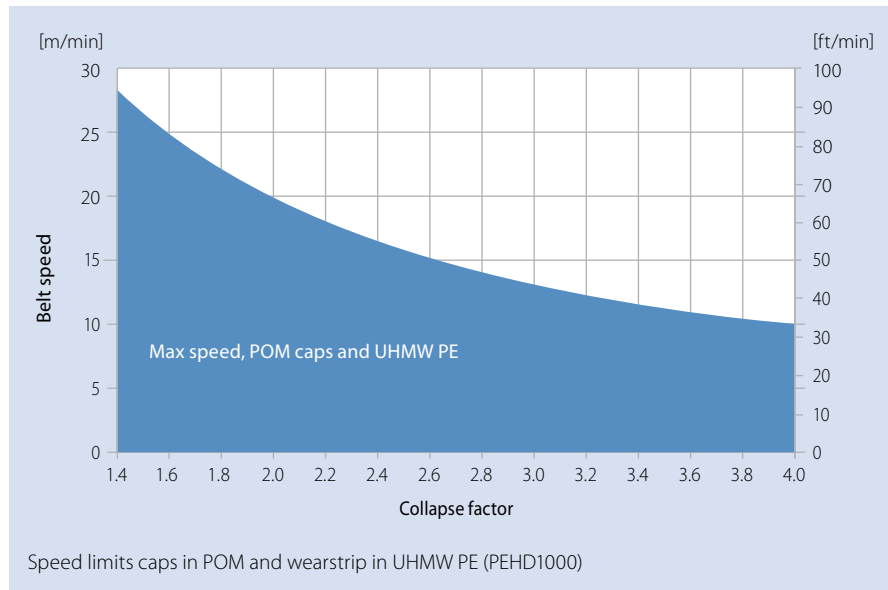

For radius conveyors running at higher speeds, Series 11 offers an alternative with caps or HD on the belt edge made of a special robust, resistant material identified by material code HW. For these we recommend using wearstrips in Nylatron NSM, a special PA material with solid lubricant additives. This material combination will in general offer an extended service life for conveyors with heavy loads or conveyors running in abrasive environments.

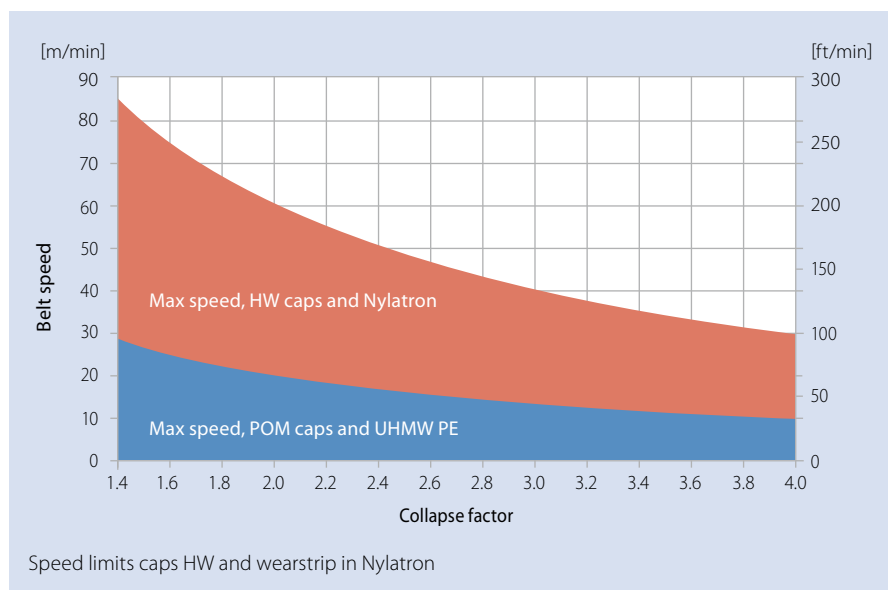


## 6.3 ADDITIONAL TABLES

### Shaft dimensions for molded sprockets

#### Metric

Nominal shaft width Square shafts	$W_s$ [mm]	
SQ 20 mm	20	$\pm 0.15$
SQ 25 mm	25	$\pm 0.15$
SQ 30 mm	30	$\pm 0.15$
SQ 40 mm	40	$\pm 0.2$
SQ 50 mm	50	$\pm 0.2$
SQ 60 mm	60	$\pm 0.2$
SQ 80 mm	80	$\pm 0.2$
SQ 90 mm	90	$\pm 0.2$

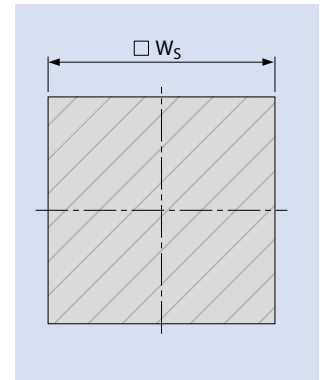


Nominal shaft diameter Round shafts	[mm]							
	$d_s$	Tol.	$W_K$	Tol.	$h_K$	Tol.	$d_K$	Tol.
RD 20 mm	20	-0.21	6	-0.3	2.8	-0.2	22.8	-0.41
RD 25 mm	25	-0.21	8	-0.4	3.3	-0.2	28.3	-0.41
RD 30 mm	30	-0.21	8	-0.4	3.3	-0.2	33.3	-0.41
RD 40 mm	40	-0.25	12	-0.4	3.3	-0.2	43.3	-0.45
RD 50 mm	50	-0.25	14	-0.4	3.8	-0.2	53.8	-0.45
RD 60 mm	60	-0.3	18	-0.4	4.4	-0.2	64.4	-0.5

#### Imperial

Nominal shaft width Square shafts	$W_s$ [in]	
SQ 1 in (1")	1	$\pm 0.006$
SQ 1.25 in (1 1/4")	1.25	$\pm 0.006$
SQ 1.5 in (1 1/2")	1.5	$\pm 0.006$
SQ 2.0 in (2")	2	$\pm 0.008$
SQ 2.5 in (2 1/2")	2.5	$\pm 0.008$
SQ 3.5 in (3 1/2")	3.5	$\pm 0.008$

Nominal shaft diameter Round shafts	[in]							
	$d_s$	Tol.	$W_K$	Tol.	$h_K$	Tol.	$d_K$	Tol.
RD 0.75 in (3/4")	0.75	-0.008	0.188	-0.001	0.087	-0.015	0.837	-0.023
RD 1 in (1")	1	-0.008	0.25	-0.001	0.114	-0.015	1.114	-0.023
RD 1.19 in (1 3/16")	1.187	-0.010	0.25	-0.001	0.118	-0.015	1.306	-0.025
RD 1.25 in (1 1/4")	1.25	-0.010	0.25	-0.001	0.118	-0.015	1.368	-0.025
RD 1.44 in (1 7/16")	1.438	-0.010	0.375	-0.001	0.169	-0.015	1.607	-0.025
RD 1.5 in (1 1/2")	1.5	-0.010	0.375	-0.001	0.169	-0.015	1.669	-0.025
RD 1.94 in (1 5/16")	1.938	-0.010	0.5	-0.002	0.224	-0.015	2.162	-0.025
RD 2 in (2")	2	-0.012	0.5	-0.002	0.224	-0.015	2.224	-0.027
RD 2.5 in (2 1/2")	2.5	-0.012	0.625	-0.002	0.28	-0.015	2.78	-0.027

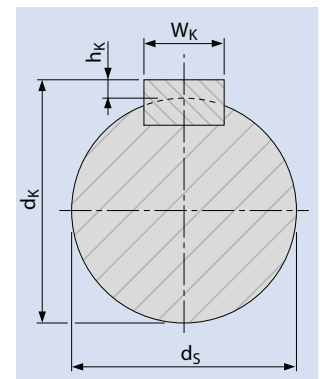

Shaft dimensions (round and square) according to ISO 286-2 h12 (or closer degree of tolerance e.g. h7) can be used.

Key material according to ISO 286-2 h9 can be used.



## Bore size dimensions at Prolink sprockets

To fulfill the correct fitting to the shaft, the bore size dimension of our Siegling Prolink sprockets has to fulfill our quality requirements. To consider the shape and position tolerance of the bore size, our Siegling Prolink sprockets will be checked by plug gauges.

A check of the bore size by caliber is not possible (will not consider the shape and position tolerance).

The dimensions of the bore size (see table below).

### Metric

Bore size	Bore diameter [mm]
<b>Square hub</b>	
SQ 20 mm	20.3 ± 0.15
SQ 25 mm	25.3 ± 0.15
SQ 30 mm	30.3 ± 0.15
SQ 40 mm	40.4 ± 0.2
SQ 50 mm	50.4 ± 0.2
SQ 60 mm	60.4 ± 0.2
SQ 80 mm	80.4 ± 0.2
SQ 90 mm	90.4 ± 0.2
<b>Round hub</b>	
RD 18 mm	18.1 ± 0.1
RD 20 mm	20.1 ± 0.1
RD 25 mm	25.1 ± 0.1
RD 30 mm	30.1 ± 0.1
RD 40 mm	40.1 ± 0.1
RD 50 mm	50.1 ± 0.1
RD 60 mm	60.1 ± 0.1

### Imperial

Bore size	Bore diameter [mm]
<b>Square hub</b>	
SQ 1 in (1")	25.7 ± 0.15
SQ 1.25 in (1 ¼")	32.05 ± 0.15
SQ 1.5 in (1 ½")	38.4 ± 0.15
SQ 2 in (2")	51.2 ± 0.2
SQ 2.5 in (2 ½")	63.9 ± 0.2
SQ 3.5 in (3 ½")	89.3 ± 0.2
<b>Round hub</b>	
RD 0.75 in (¾")	19.15 ± 0.1
RD 1 in (1")	25.5 ± 0.1
RD 1.19 in (1 ⅜")	30.26 ± 0.1
RD 1.25 in (1 ¼")	31.85 ± 0.1
RD 1.44 in (1 7/16")	36.6 ± 0.1
RD 1.5 in (1 ½")	38.2 ± 0.1
RD 1.94 in (1 15/16")	49.3 ± 0.1
RD 2 in (2")	50.9 ± 0.1
RD 2.5 in (2 ½")	63.6 ± 0.1

## 6.3 ADDITIONAL TABLES

### Groove dimensions for circlips


#### Metric

Shaft diameter	Circlip	Groove width – m tolerance H13 [mm]	Groove diameter – D <sub>s</sub> tolerance h12 [mm]	Groove distance – W
<b>Square shaft</b>				
SQ 20 mm	DIN 471 – 28x1.5	1.6	26.6	Sprocket width (b) + 1 mm
SQ 25 mm	DIN 471 – 35x1.5	1.6	33.0	Sprocket width (b) + 1 mm
SQ 40 mm	DIN 471 – 56x2	2.2	53.0	Sprocket width (b) + 1 mm
SQ 60 mm	DIN 471 – 85x3	3.2	81.5	Sprocket width (b) + 1 mm
SQ 80 mm	DIN 471 – 115x4	4.2	111.0	Sprocket width (b) + 1 mm
SQ 90 mm	DIN 471 – 127x4	4.2	123.0	Sprocket width (b) + 1 mm
<b>Round shaft</b>				
RD 20 mm	DIN 471 – 20x1.2	1.3	19.0	Sprocket width (b) + 1 mm
RD 25 mm	DIN 471 – 25x1.2	1.3	23.9	Sprocket width (b) + 1 mm
RD 30 mm	DIN 471 – 30x1.5	1.6	28.6	Sprocket width (b) + 1 mm
RD 40 mm	DIN 471 – 40x1.75	1.9	37.5	Sprocket width (b) + 1 mm

#### Imperial

Shaft diameter	Circlip	Groove width – m tolerance H13 [in]	Groove diameter – D <sub>s</sub> tolerance h12 [in]	Groove distance – W
<b>Square shaft</b>				
SQ 1.5 in (1 ½")	SH-212	0.086	2.003	Sprocket width (b) + 3/64 in
SQ 2.5 in (2 ½")	SH-354	0.12	3.357	Sprocket width (b) + 3/64 in
SQ 2.5 in (2 ½")	SH-350*	0.12	3.316	Sprocket width (b) + 3/64 in
SQ 3.5 in (3 ½")	SH-500	0.12	4.79	Sprocket width (b) + 3/64 in
<b>Round shaft</b>				
RD 0.75 in (¾")	SH-75	0.046	0.704	Sprocket width (b) + 3/64 in
RD 1 in (1")	SH-100	0.046	0.94	Sprocket width (b) + 3/64 in
RD 1.19 in (1 ⅜")	SH-118	0.056	1.118	Sprocket width (b) + 3/64 in
RD 1.25 in (1 ¼")	SH-125	0.056	1.176	Sprocket width (b) + 3/64 in
RD 1.38 in (1 ⅜")	SH-137	0.056	1.291	Sprocket width (b) + 3/64 in
RD 1.44 in (1 ⅞")	SH-143	0.056	1.35	Sprocket width (b) + 3/64 in
RD 1.5 in (1 ½")	SH-150	0.056	1.406	Sprocket width (b) + 3/64 in

\* alternativ to SH-354

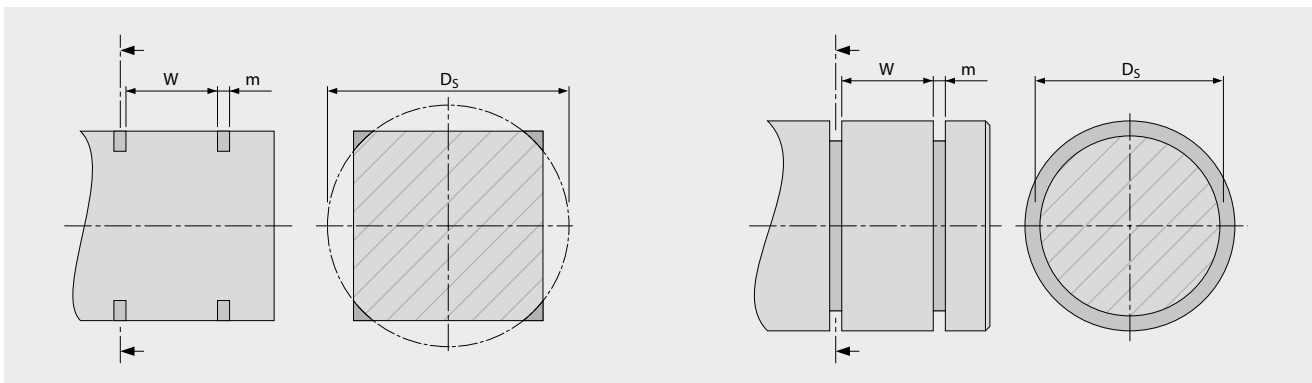





# 6.3 ADDITIONAL TABLES

## Minimum design radii


### Standard conveyors

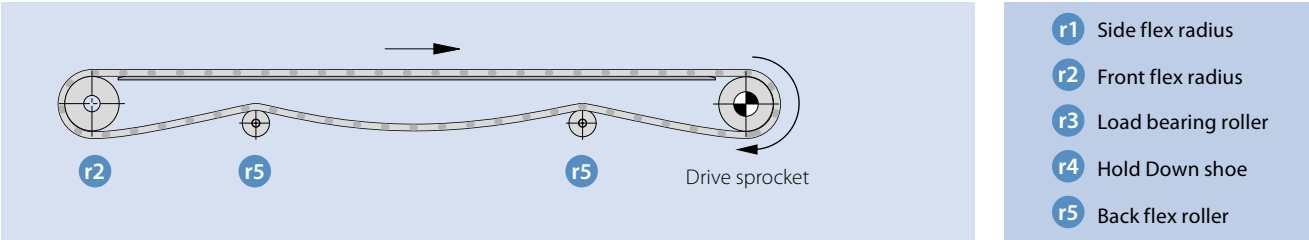


### Centre drive conveyors

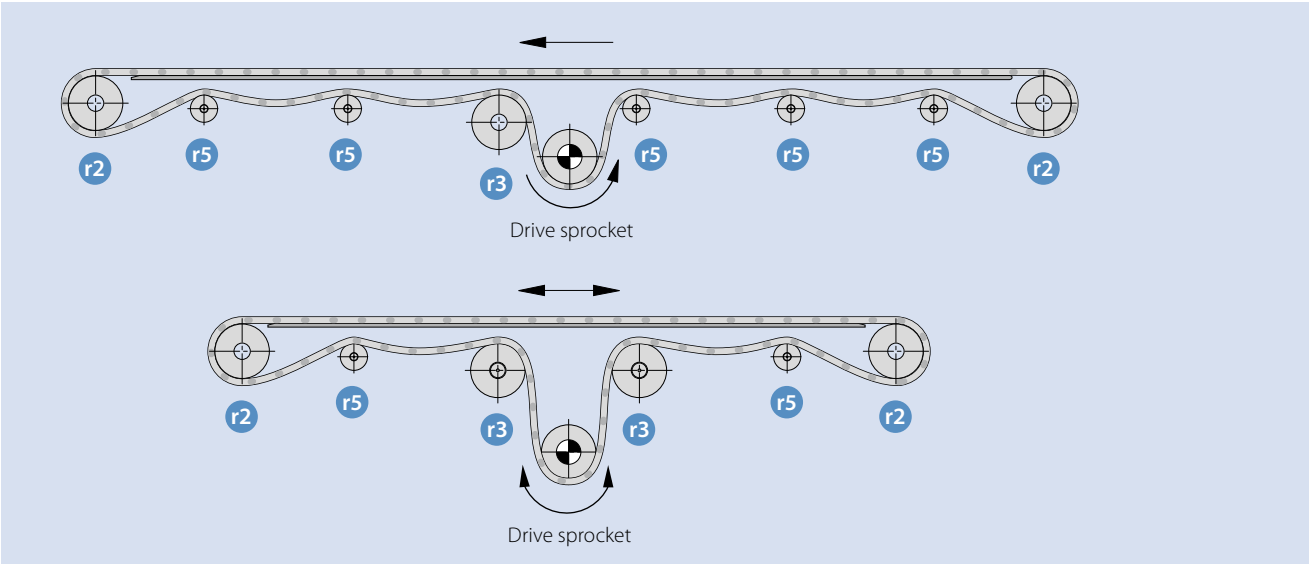


### Inclined conveyors

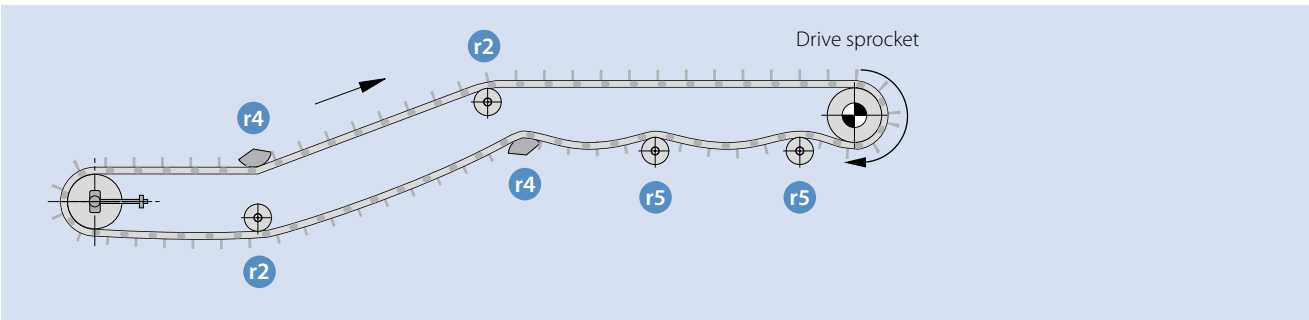

### Nose bar conveyors

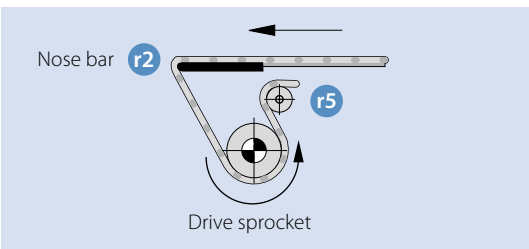

### Curve conveyors

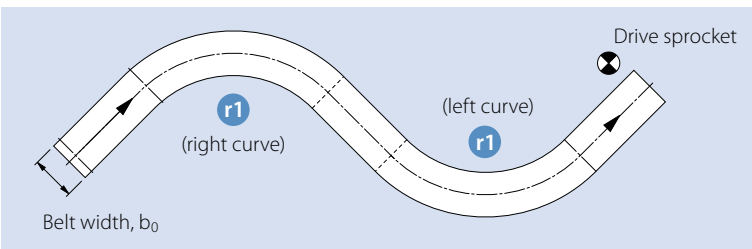

Belt types	Pitch	Front flex radius*	Back flex radius on			
		on rollers <b>r2</b>	load bearing rollers <b>r3</b>	Hold Down shoes <b>r4</b>	rollers <b>r5</b>	
S1-x FLT / NSK / FRT / SRS / RRB	2 in 50 mm	2 in 50 mm	4 in/100 mm	6 in 150 mm	2 in/50 mm	
S1-PMU with SG **			6 in/150 mm		6 in/150 mm	
S2-x FLT / GRT	1 in 25 mm	1 in 25 mm	2 in 50 mm	3 in 75 mm	1 in/25 mm	
S2-57 RRB					2 in/50 mm	
S2-x PMU with SG **					2 in/50 mm	
S4.1-x FLT / NPY / NTP	0.55 in 14 mm	0.45 in 11 mm	1 in 25 mm	1.5 in 38 mm	0.5 in/12.5 mm	
S4.1-0 FRT1			0.7 in/16.5 mm			
S5-45 GRT / NTP / FRT	1 in 25 mm	1 in/25mm	2 in/50 mm	3 in 75 mm	1 in/25 mm	
S5-45 PMU with SG **		1 in/25mm	3 in/75 mm		3 in/75 mm	
S5-45 G / RG		2 in/50 mm	2 in/50 mm		1 in/25 mm	
S6.1-x FLT / CTP / NPT / PRR	2 in 50 mm	2 in 50 mm	4 in/100 mm	6 in 150 mm	2 in/50 mm	
S6.1-x PMU with SG **			6 in/150 mm		6 in/150 mm	
S7-x FLT / NSK / FRT / SRS / PRR	1.6 in 40 mm	1.6 in 40 mm	3.2 in 80 mm	4.8 in 120 mm	1.6 in 40 mm	
S8-x FLT / NSK / RAT / FRT / SRS / PRR	1 in 25 mm	1 in 25 mm	2 in 50 mm	3 in 75 mm	1 in/25 mm	
S8.1-30 FLT GT			3 in/75 mm		1.25 in/30 mm	
S8-0 RTP A90						
S8-0 PMU with SG **						
S9-57 GRT / NTP	2 in 50 mm	2 in 50 mm	4 in/100 mm	6 in 150 mm	2 in/50 mm	
S9-57 PMU with SG **			6 in/150 mm		6 in/150 mm	
S9.1-57 GRT	2 in 50 mm	2 in 50 mm	4 in 100 mm	6 in 150 mm	2 in 50 mm	
S10-x FLT / NTP / LRB / FRT1	1 in 25 mm	1 in 25 mm	2 in/50 mm	3 in 75 mm	1 in/25 mm	
S10-0 PMU with SG **			3 in/75 mm		3 in/75 mm	
S11-45 GRT / NTP / FRT	1 in 25 mm	1 in 25 mm	2 in 50 mm	6 in/150 mm	1 in 25 mm	
S11/S5 combo				3 in/75 mm		
S13-x FLT / NPY / CTP	0.315 in 8 mm	0.118 in*** 3 mm***	0.6 in 16 mm	0.9 in 24 mm	0.3 in 8 mm	
S14-x FLT	0.5 in 12.7 mm	0.38 in 9.5 mm	1 in 25.4 mm	1.5 in 38.1 mm	0.5 in 12.7 mm	
S15-47 GRT / RSA	0.5 in 12.7 mm	0.25 in 6.4 mm	1 in 25.4 mm	1.5 in 38.1 mm	0.5 in 12.7 mm	
S17-0 FLT / SRS	1 in 25 mm	1 in 25 mm	2 in 50 mm	3 in 75 mm	1 in 25 mm	
S18-44 GRT (G) / FRT1 / HDK 2.2 / GRT 1.7	1 in 25 mm	1 in 25 mm	2 in 50 mm	3 in 75 mm	1 in 25 mm	

Using larger radii than listed will reduce wear on belt, rollers and/or shoes.

Larger radii will also likely reduce noise levels and make the belt run more smoothly.

\* Depending on the application (e.g. knife edge) smaller radii are possible -> speed, noise, conveying goods (jiggle)

\*\* Back flex radius depends on profile height and distance

\*\*\* Knife edge/nose bar

## 6.3 ADDITIONAL TABLES

### Load index

The following table shows the changes in load capacity between different materials and over all available series.

#### Straight running belts

Series	PE	PP	POM	PA
S1	60 %	100 %	133 %	–
S2	10 %	17 %	23 %	17 %
S4.1	10 %	17 %	33 %	33 %
S5	33 %	60 %	83 %	–
S6.1	43 %	60 %	100 %	100 %
S7	60 %	100 %	200 %	–
S8, S8.1	–	67 %	133 %	100 %
S8-0 RTP	–	–	67 %	–
S9, S9.1	40 %	73 %	100 %	80 %
S10-0 FLT, S10-0 NTP, S10-0 FRT1	20 %	27 %	67 %	–
S10-22 FLT	10 %	17 %	37 %	–
S10-36 FLT, S10-36 LRB	13 %	20 %	43 %	43 %
S11	–	30 %	50 %	50 %
S13	–	–	13 %	–
S14	22 %	30 %	80 %	–
S15	–	8 %	17 %	15 %
S17	–	60 %	107 %	–

#### Side flexing belts

Series	PE	PP	POM	PA
S5	–	56 %	100 %	–
S5 RG, S5 ST	–	67 %	117 %	–
S9, S9.1	–	89 %	156 %	124 %
S11	–	33 %	56 %	56 %
S18	–	56 %	89 %	–

### General material data

Material	Coefficient of thermal expansion		Density ISO 1183 [ $\frac{\text{kg}}{\text{m}^3}$ ]	E-modulus ISO 527 [MPa]	Melting point ISO 11357		Electrical surface resistivity IEC60093 [ $\Omega$ ]
	[ $\frac{\text{mm}}{\text{m} \cdot ^\circ\text{C}}$ ]	[ $\frac{10^{-6} \text{ in}}{\text{in} \cdot ^\circ\text{F}}$ ]			[°C]	[°F]	
PA	0.12	66.6	1120	3400	221	429.8	$10^{14}$
PA-HT	0.10	55.5	1360	10000	262	500	$10^{13}$
PBT	0.16	88.8	1300	2500	223	433.4	$10^{13}$
PE	0.21	116.7	964	1150	135	275	–
PE-I	0.21	116.7	960	1100	–	–	–
PE-MD	0.21	116.7	984	1100	–	–	–
PLX	0.11	174.6	1240	1650	220	428	$10^{14}$
POM	0.12	66.6	1410	2850	166	330.8	$10^{14}$
POM-HC	0.12	66.6	1410	2580	166	330.8	$< 10^6$
POM-CR	0.11	66.6	1410	2500	162	323.6	–
POM-MD	0.12	66.7	1476	2800	166	330.8	$10^{12}$
PP	0.15	83.3	905	1550	165	329	–
PP-MD	0.15	83.3	990	1500	–	–	–
PP-SW	0.10	83.3	910	1500	167	333	–
PXX-HC	0.15	83.3	1150	2000	165	329	$< 10^3$
TPC1	0.185	102.8	1240	310	212	413.6	$10^{12}$

## Dimension deviation

Belt type	Belt material					
	PE	POM	PP	PXX-HC	PA	PA-HT
S1 - 0 FLT	-0.35 %	-0.75 %	0.00 %	0.00 %	-	1.10 %
S1 - 0 FRT1, NSK, SRS	-	-0.75 %	-	-	-	-
S1 - 18 FLT	0.15 %	-0.70 %	0.00 %	-	-	1.10 %
S2 - 0 FLT	-0.20 %	-0.30 %	0.25 %	-	-	-
S2 - 12 FLT	0.00 %	-0.10 %	0.20 %	-	-	-
S2 - 0 FRT1	-	-0.30 %	-	-	-	-
S2 - 57 GRT	-0.20 %	-0.20 %	0.20 %	0.20 %	-	1.30 %
S2 - 57 RRB	-0.20 %	-0.20 %	0.20 %	-	-	-
S4.1 - 0 FLT, FRT1	-0.10 %	0.10 %	0.25 %	0.25 %	-	-
S4.1 - 0 NPY	-0.10 %	0.10 %	0.25 %	-	-	-
S4.1 - 21 FLT	-0.10 %	0.10 %	0.25 %	-	-	1.20 %
S4.1 - 21 NTP	-0.10 %	0.10 %	0.25 %	-	-	-
S5 - 45 GRT	0.00 %	0.00 %	0.00 %	-	0.00 %	-
S6.1 - 0 CTP, NTP	-0.65 %	-0.65 %	0.00 %	-	-	-
S6.1 - 0 FLT	-0.65 %	-0.65 %	0.00 %	-	0.00 %	-
S6.1 - 21 FLT	-0.50 %	-0.50 %	0.00 %	-	-	-
S6.1 - 23 FLT	-0.50 %	-0.50 %	0.00 %	-	0.83 %	-
S6.1 - 36 FLT	-0.50 %	-0.50 %	0.00 %	-	-	-
S7 - 0 FLT	-0.35 %	-0.75 %	0.00 %	-0.13 %	-	-
S7 - 0 FRT1	-0.35 %	-0.75 %	0.00 %	-	-	-
S7 - 0 NSK, SRS	-	-0.75 %	-	-0.13 %	-	-
S7 - 6 FLT	0.00 %	-0.70 %	0.00 %	-	-	-
S7 - 6 NSK	-	-0.70 %	-	-	-	-
S8 - 0 FLT	-0.31 %	-0.31 %	0.00 %	0.00 %	-	1.49 %
S8 - 0 FRT1	-	-0.31 %	0.00 %	-	-	-
S8 - 0 NSK, SRS	-	-0.31 %	0.00 %	0.00 %	-	-
S8 - 25 RAT	-0.31 %	-0.61 %	0.00 %	-	-	1.53 %
S8.1 - 30 FLT	-0.31 %	-0.58 %	0.00 %	-	-	-
S8 - 0 RTP A90	-	-0.31 %	-	-	-	-
S9 - 57 GRT	0.00 %	0.00 %	0.00 %	-	0.00 %	-
S9.1 - 57 GRT	-	0.00 %	-	-	-	-
S10 - 0 FLT	0.00 %	0.00 %	0.26 %	-	0.74 %	-
S10 - 0 NTP, FRT1	0.00 %	0.00 %	0.26 %	-	-	-
S10 - 22 FLT	0.00 %	0.00 %	0.26 %	-	-	-
S10 - 36 FLT	0.00 %	0.00 %	0.26 %	-	0.74 %	-
S10 - 36 LRB	0.00 %	0.00 %	0.26 %	-	-	-
S11 - 45 GRT	-	0.00 %	0.20 %	-	0.60 %	-
S13 - 0 FLT, NPY, CTP	-	0.23 %	-	0.89 %	1.38 %	-
S13 - 34 FLT	-	0.23 %	-	-	1.38 %	-
S14 - 0 FLT	-0.13 %	0.00 %	0.43 %	-	-	-
S14 - 25 FLT	-0.13 %	0.00 %	0.43 %	-	0.92 %	-
S14 - 25 CUT	-	0.00 %	0.43 %	-	-	-
S14 - 25 FRT1	-	-	0.00 %	-	-	-
S15 - 47 GRT, RSA	-	-0.40 %	-1.00 %	-	0.40 %	-
S17 - 0 FLT	-	-0.09 %	0.35 %	-	-	-
S17 - 0 SRS	-	-	-	0.35 %	-	-
S18 - 44 GRT 2.2	-	-0.10 %	0.50 %	-	0.85 %	-
S18 - 44 HDK	-	-0.10 %	0.50 %	-	0.85 %	-
S18 - 44 GRT 1.7	-	-0.10 %	0.50 %	-	-	-
S18 - 44 FRT1 2.2	-	-	0.50 %	-	-	-

## 6.3 ADDITIONAL TABLES

### Dimension tolerance

Belt Series	Tolerance
S1, S2, S4.1, S6.1, S7, S8, S10, S13, S14, S15, S17, S18	± 0.2 %
S5, S9, S9.1, S11	± 0.3 %

#### Example:

S6.1-23 in POM with nominal width of 600 mm

#### Deviation:

$$-0.5\%: 600 \cdot (1 - 0.005) = 597 \text{ mm}$$

#### Tolerance:

$$\pm 0.2\%: 600 \cdot 0.002 = 1.2 \text{ mm}$$

#### Actual belt width:

$$597 \pm 1.2 \text{ mm}$$

S6.1-23 in POM with nominal width of 23.62 in

$$23.62 \cdot (1 - 0.005) = 23.50 \text{ in}$$

$$23.62 \cdot 0.002 = 0.05 \text{ in}$$


$$23.50 \pm 0.05 \text{ in}$$

### Drainage capacity/flow rate of Prolink belts

The percentage of open area for Siegling Prolink belts and modules is shown in the nomenclature e.g. S6.1-36 FLT or S8-25 RAT. Also, chapter 1.2 ("Detailed series information") of the PEM shows the percentage of open area for each available surface pattern. More detailed information on the belt opening is shown in the surface pattern dimensions.

The percentage of open area refers to how much light passes through. It is calculated by the relation of the open to the closed surface area, using a representative belt section of the CAD model. This theoretical value gives the possibility to compare the different Siegling Prolink series according the open area.

The real permeability or drainage capacity of a belt is related to the "FLOW RATE" of the medium through the belt. This "drainage capacity" will be influenced by the percentage of open area, but also by the flow of the fluid, and the modules roundings and gaps.

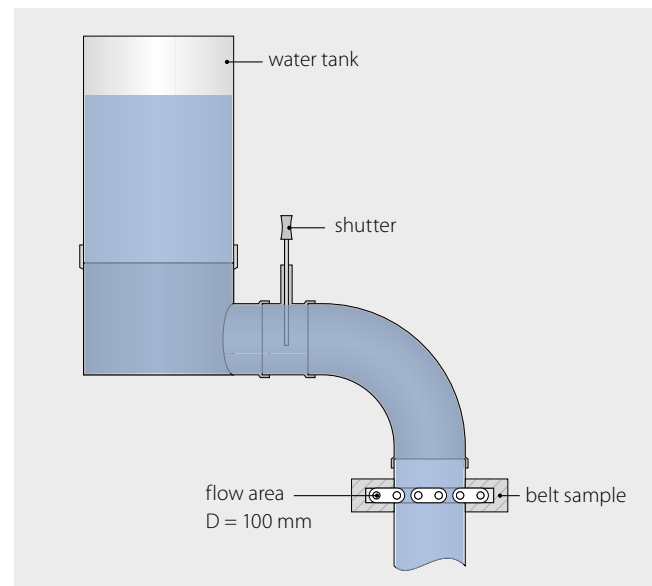




For this reason, Forbo Siegling has developed a drainage test for modular belts. The published “FLOW RATE” is defined in liters per second (l/s) and will support our customer when choosing the right belt for a water drainage application. (Custom testing with other fluids is possible.)

#### Test setup:

- Representative belt area (real sample, stretched)
- Large volume of water (> 50 l)
- Defined flow area (D = 100 mm -> 78.5 cm<sup>2</sup>  
[D = 3.94 in -> 12.2 in<sup>2</sup>])
- Time measurement by video analysis  
(when the fluid flow is constant, the time for 50 l water volume to flow will be measured)
- Comparison tests (same settings for all tests)

#### Test results:

- Diagram 1 shows the average flow rate for different Siegling Prolink belt types.
- The maximum flow rate of the test set-up is 18.3 l/s -> without a belt.
- “Closed series” have the lowest flow rate, but they are water permeable.
- A food series with smooth rounded surfaces like S6.1-36 and S10-36 shows a high flow rate (12.4 – 12.8 l/s).
- The curve belts S5-45 GRT and S9-57 GRT are tested as straight running samples. The flow rate of S5-45 GRT is not in line with the percentage of open area, which may be due to turbulent water flow caused by the elongated holes.

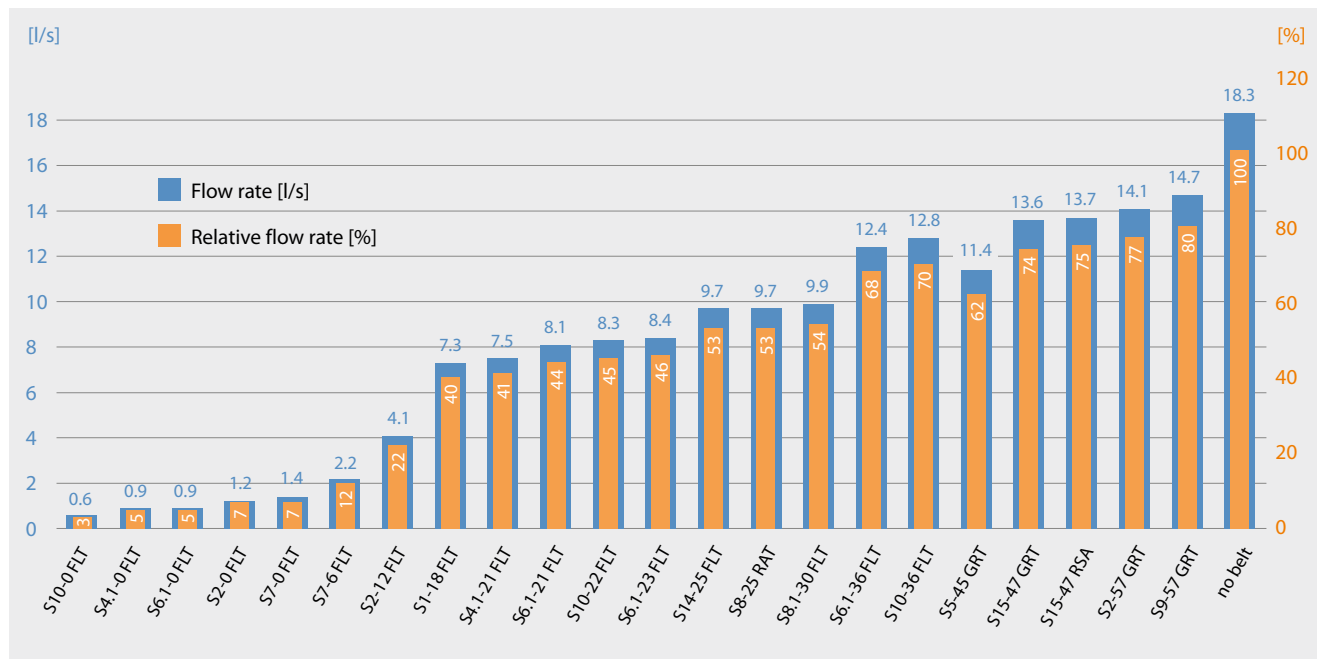


## 6.4 CONVERSION TABLE METRIC/IMPERIAL


Metric	Multiply	Imperial	Multiply	Metric
<b>Length</b>				
millimeter	0.03937	inch	25.4	millimeter
meter	39.37	inch	0.0254	meter
millimeter	0.0033	foot	304.8	millimeter
meter	3.281	foot	0.3048	meter
<b>Area</b>				
square millimeter	0.00155	square inch	645.2	square millimeter
square meter	1550	square inch	0.000645	square meter
square millimeter	0.00001	square foot	92.903	square millimeter
square meter	10.764	square foot	0.0929	square meter
<b>Volume</b>				
cubic meter	35.31	cubic foot	0.0283	cubic meter
liter	0.0353	cubic foot	28.32	liter
<b>Speed</b>				
meter/min	0.0547	foot/second	18.29	meter/min
meter/min	3.281	foot/minute	0.3048	meter/min
<b>Mass and Density</b>				
kilogram	2.205	pound	0.4536	kilogram
kilogram/cubic meter	0.0624	pound/cubic foot	16.02	kilogram/cubic meter
<b>Force</b>				
kilogram-force	2.204	pound-force	0.4537	kilogram-force
newton	0.225	pound-force	4.448	newton
<b>Torque</b>				
Newton meter	88.512	inch pound	0.113	Newton meter
<b>Power</b>				
watt	0.00134	horsepower	745.7	watt
<b>Pressure</b>				
kilogram/square meter	0.00142	pound/square inch	703.072	kilogram/square meter
<b>Temperature</b>				
°C	$9 \cdot \left(\frac{^{\circ}\text{C}}{5}\right) + 32^{\circ}$	°F	$\frac{5}{9} \cdot (^{\circ}\text{F} - 32^{\circ})$	°C

## 6.5 ASSEMBLY INFORMATION

### Assembly Retainer Rings

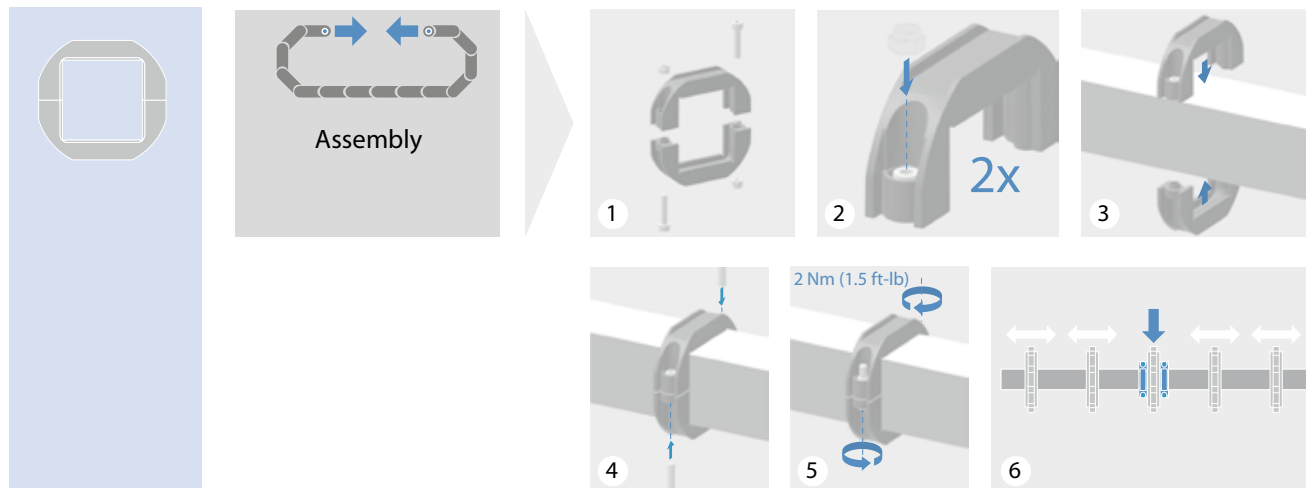

### Assembly Split Sprockets

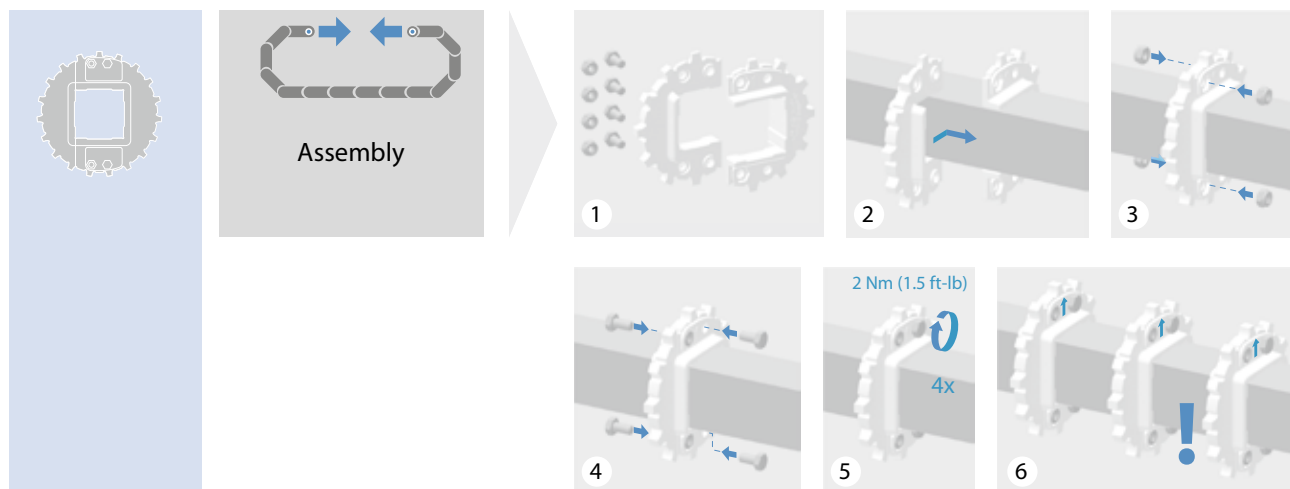

## 6.6 QUESTIONNAIRE

See following pages

# Bent profiles – Specification sheet

**siegling prolink**  
modular belts

Please fill in the orange colored fields and add this document to your order in SAP

Company

## Base profile used


Art. #	Description

## SAP Nomenclature (only relevant in case inventory is needed)

Art. #	Description
98xxxx99	"base profile #" @xxx h_s/h1/h2 MM

## Bending details

Designation	Description	Dimensions	Constrains
@	Bending angle from vertical		0° to 90°
h_s	Final total height above base		
h1	Height of bending point		> 54 – h_m
h2	Length of the bent section		> 19 mm

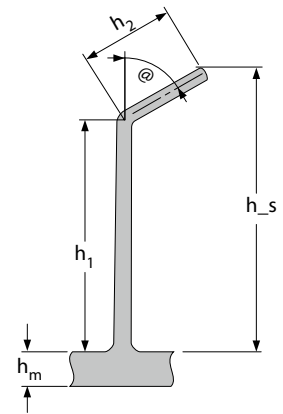

## Example

### Base profile used


Art. #	Description
98088499	S6.1-0 FLT PMU PP-HA WT H100 W200

## SAP Nomenclature (only relevant in case inventory is needed)

Art. #	Description
98xxxx99	98088499 @55 75/40/60 MM

## Bending details

Designation	Description	Dimensions	
@	Bending angle from vertical	55°	
h_s	Final total height above base	75 mm	
h1	Height of bending point	40 mm	
h2	Length of the bent section	60 mm	

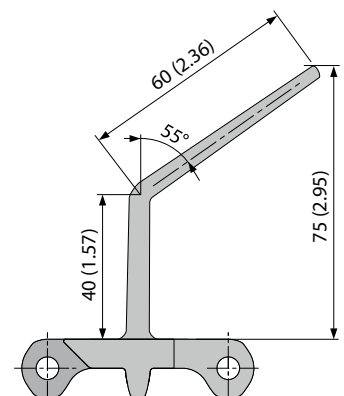

**forbo**

MOVEMENT SYSTEMS

# Application check list

## siegling prolink modular belts

Name: \_\_\_\_\_ Date: \_\_\_\_\_

### Customer data

Company/Customer name: \_\_\_\_\_ Contact person: \_\_\_\_\_

Customer type (x): ☐ OEM ☐ Dealer/Distributor ☐ End user

End user name: \_\_\_\_\_

### Application data

Industry: \_\_\_\_\_

Application: \_\_\_\_\_

Conveyed product: \_\_\_\_\_

#### Wrapping/Container (x):

- |   |  |  |
|---|--|--|
| <input type="checkbox"/> Non            | <input type="checkbox"/> Cardboard     | <input type="checkbox"/> Plastic container |
| <input type="checkbox"/> Shrink wrapped | <input type="checkbox"/> Flow pack     | <input type="checkbox"/> Wood              |
| <input type="checkbox"/> Glass          | <input type="checkbox"/> Steel cans    | <input type="checkbox"/> Alu cans          |
| <input type="checkbox"/> Steel trays    | <input type="checkbox"/> Plastic trays | <input type="checkbox"/> Strapped          |
| <input type="checkbox"/> Other _____    |  |  |

Item size: ☐ mm ☐ Inch

LxWxH: \_\_\_\_\_ Ø x H: \_\_\_\_\_

Load (delete incorrect units): \_\_\_\_\_ kg/item or lb/item  
\_\_\_\_\_ kg/m or lb/ft \_\_\_\_\_ kg/m<sup>2</sup> or lb/ft<sup>2</sup>

Throughput (delete incorrect units):  
\_\_\_\_\_ item/min \_\_\_\_\_ kg/min or lb/min

Belt speed: \_\_\_\_\_ m/min or ft/min

#### Conveyor layout

Distance between shafts: C-C: \_\_\_\_\_ mm/In

Top view: ☐ Straight ☐ Side flexing/curved conveyor

Side view: ☐ Straight ☐ Incline ☐ Decline

Angle to horizontal: \_\_\_\_\_ °

#### Start/stop operation:

- ☐ No (continuous drive) ☐ Yes nos. of stop/hour: \_\_\_\_\_  
☐ Product indexing \_\_\_\_\_

#### Accumulation:

☐ No ☐ Full ☐ Partly, length: \_\_\_\_\_

#### Operating temperature:

Minimum: \_\_\_\_\_ C°/F° Normal: \_\_\_\_\_ C°/F°  
Maximum: \_\_\_\_\_ C°/F°

#### Is the belt lubricated?

☐ No ☐ Yes, type \_\_\_\_\_

#### Is the belt exposed to chemicals during operation?

☐ No ☐ Yes, type \_\_\_\_\_

#### Is the belt exposed to chemicals during cleaning?

☐ No ☐ Yes, type \_\_\_\_\_

### Belt data

- ☐ New belt ☐ Retrofit Original belt from: \_\_\_\_\_  
Belt type: \_\_\_\_\_ Belt pitch: \_\_\_\_\_ mm/In  
Belt color: \_\_\_\_\_

#### Belt material:

- ☐ POM ☐ PP ☐ PE ☐ PA  
☐ Stainless steel ☐ steel ☐ Other: \_\_\_\_\_

#### Pin material:

- ☐ POM ☐ PP ☐ PE ☐ PA  
☐ Stainless steel ☐ Steel ☐ Other: \_\_\_\_\_

#### Pin retention system:

- ☐ Clips ☐ Integrated in pin ☐ Other: \_\_\_\_\_

#### Belt configuration:

Belt length: \_\_\_\_\_ mm/In Belt width: \_\_\_\_\_ mm/In

#### Top accessories (like Profiles):

Type & height: \_\_\_\_\_ Side indent: \_\_\_\_\_ Pitch: \_\_\_\_\_

#### Side accessories (like SG):

Type & height: \_\_\_\_\_ Side indent: \_\_\_\_\_

### Sprocket data

#### Drive shaft:

Size: z = \_\_\_\_\_ per shaft: \_\_\_\_\_ pcs  
Pitch diameter: \_\_\_\_\_ mm/In "A" dimension: \_\_\_\_\_ mm/In  
Bore type: ☐ ● ☐ ● + keyway ☐ ■  
Bore size: \_\_\_\_\_

#### Idler shaft:

Size: z = \_\_\_\_\_ per shaft: \_\_\_\_\_ pcs  
Pitch diameter: \_\_\_\_\_ mm/In "A" dimension: \_\_\_\_\_ mm/In  
Bore type: ☐ ● ☐ ● + keyway ☐ ■  
Bore size: \_\_\_\_\_

### Wearstrip/Wearbed data

#### Material:

- ☐ PE HD 1000/UHMW PE ☐ PE HD 500/HMW PE  
☐ Stainless steel ☐ Other: \_\_\_\_\_

#### Configuration:

- ☐ Wear strips size (WxT): \_\_\_\_\_ Spacing: \_\_\_\_\_  
☐ Herringbone size (WxT): \_\_\_\_\_ Spacing: \_\_\_\_\_  
☐ Solid sheet/full belt support ☐ Other: \_\_\_\_\_



MOVEMENT SYSTEMS

Name: \_\_\_\_\_ Date: \_\_\_\_\_

A full-page sheet of white graph paper featuring a uniform grid of thin, light gray horizontal and vertical lines. The grid consists of small squares covering the entire area of the page.

Sketch of conveyor, stating travel direction and location of drive motor.

Are there currently reports of any problems with this application?

☐ No

☐ Yes, please describe:

---

---

---

---

What is the main reason for the customers interest in a new belt?

☐ New application/New conveyor

☐ New demands on existing conveyor, please describe: \_\_\_\_\_

Current belt is showing:

☐ Significant wear, age of existing belt: \_\_\_\_\_ year(s)

☐ Significant breakages, cause of breakages: \_\_\_\_\_

☐ Brittleness/aging/chemical degradation

Additional data or information:

---

---

---

---

---

**Forbo Siegling GmbH**

Lilienthalstraße 6/8, D-30179 Hannover

Phone +49 511 6704 0

www.forbo-siegling.com, siegling@forbo.com



## MOVEMENT SYSTEMS

# Spiral data form

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## Customer data

Company/Customer name: \_\_\_\_\_ Contact person: \_\_\_\_\_

Customer type: ☐ OEM ☐ Dealer/Distributor ☐ End user

End user name: \_\_\_\_\_

Spiral belt: ☐ New ☐ Retrofit

## Application data

### Product

Specify: \_\_\_\_\_

Product size: Max overall dimensions product or packing

Length  $l_p$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Width  $b_p$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Height  $h_p$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Weight  $m_p$  per unit: \_\_\_\_\_ g \_\_\_\_\_ lbs

Packing ☐ None ☐ On tray, pan ☐ In box

Packing material (e.g. in poly bags): \_\_\_\_\_


Weight  $m_{\text{Packing}}$  per unit: \_\_\_\_\_ g \_\_\_\_\_ lbs

### Product properties

☐ Soft, delicate ☐ Wet ☐ Fatty, sticky

☐ Crumbly ☐ Other: \_\_\_\_\_

### Product arrangement on belt at in feed:

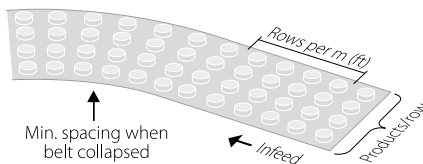

Number of products per row  $n_r$ : \_\_\_\_\_ prod./row

Number of rows of belt  $n_l$ : \_\_\_\_\_ rows/m \_\_\_\_\_ rows/ft

Max product load on belt: \_\_\_\_\_ kg/m \_\_\_\_\_ lbs/ft

Or define on collapsed belt: \_\_\_\_\_

Min gap between products: \_\_\_\_\_ mm \_\_\_\_\_ in

☐ Products not ordered (weight reasonably distributed)

☐ Products in heaps (weight concentrations)

### Required Accessories:

☐ Side guards ☐ Lane dividers

### Process

☐ Freezer ☐ Cooler ☐ Proofer

☐ Other: \_\_\_\_\_

### Process conditions

Temperature: \_\_\_\_\_ °C \_\_\_\_\_ °F

Rel Humidity: \_\_\_\_\_ %

## siegling prolink modular belts

### Air circulation

☐ No circulation ☐ No directional air flow  
☐ Forced circulation ☐ High air velocity

### Product parameters

Temperature infeed: \_\_\_\_\_ °C \_\_\_\_\_ °F

Temperature outfeed: \_\_\_\_\_ °C \_\_\_\_\_ °F

### Operating parameters

Dwell time: \_\_\_\_\_ min

Max belt speed  $v$ : \_\_\_\_\_ m/min \_\_\_\_\_ ft/min

### Production output

Production rate: \_\_\_\_\_ units/h

Throughput (capacity): \_\_\_\_\_ kg/h \_\_\_\_\_ lbs/h

### Operating conditions

Electrical control of belt & drum drive:

☐ Direct start of belt & drum drive

☐ Soft start (over frequency converters)

Production:

☐ Continuous, few changes

☐ Frequent product & speed changes

### Cleaning

☐ No periodical cleaning ☐ Not specified

### Cleaning process

☐ Only dry with brush, aspirator

☐ Wet cleaning

☐ Cleaning system installed

☐ High pressure

### Cleaning conditions

☐ Water cold (< 32°C/90°F)

☐ Water hot (> 33°C/91°F)

☐ Water – Steam (100°C/212°F)

☐ Other: \_\_\_\_\_

### Use of chemicals

☐ No chemicals used

☐ Usual household cleaners

☐ Use of cleaning agents/disinfectants (brand, type, name): \_\_\_\_\_

### Cleaning cycle

☐ Daily

☐ Weekly

☐ Other: \_\_\_\_\_

### Cleaning duration

☐ Up to 1h

☐ 1 to 3h

☐ Other: \_\_\_\_\_



MOVEMENT SYSTEMS




## Spiral layout

### Type and configuration


- ☐ Single unit  
☐ Upgoing ☐ Downgoing  
**Direction of rotation:**  
☐ Clockwise ☐ Counter-clockwise

### Angle between In- and Outrun:

- ☐ 0° (Straight) ☐ 90°

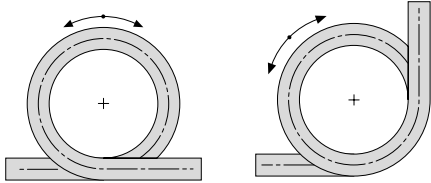

- ☐ 180° ☐ 270°

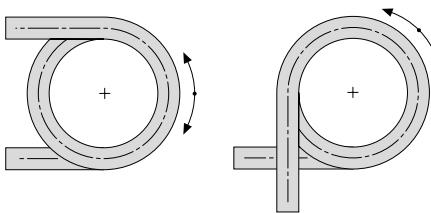


- ☐ Double unit  
☐ Up-downgoing ☐ Down-upgoing

### Disposition crossover (transfer-conveyor)

- ☐ Straight ☐ Diagonal


### Indicate running direction (fix In- & Outrun-side)

- ☐ From A (= Inrun) to B ☐ From B (= Inrun) to A

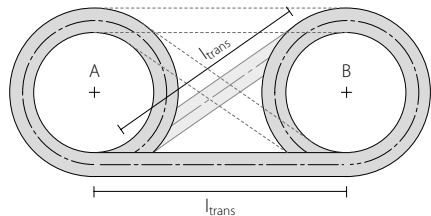

### Indicate position of In- and Outrun with 1 to 8

Inrun: Position \_\_\_\_\_ Outrun: Position \_\_\_\_\_

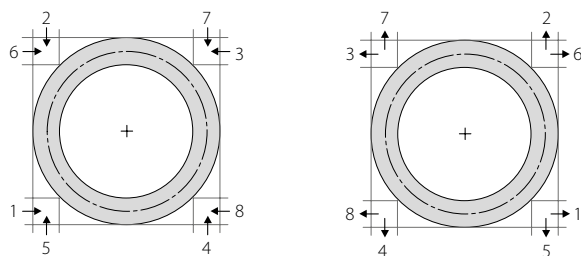

**Remark:** If configuration not given above sketch on separate sheet!

## Main dimensions of spiral

Double Spirals have generally same dimensions; if Spiral A not identical B -> Indicate both dimensions first A/second B

Drum/Cage-Diameter  $D_i$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Belt width  $b_o$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Tier height  $h$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Number of tiers  $n$ : \_\_\_\_\_

Inrun length  $l_{in}$ : \_\_\_\_\_ mm \_\_\_\_\_ in


Outrun length  $l_{out}$ : \_\_\_\_\_ mm \_\_\_\_\_ in

### Take-up roller:

Free travel height  $h_c$ : \_\_\_\_\_ mm \_\_\_\_\_ in

### Only for dual spirals:

Crossover length between spirals  $L_{trans}$ : \_\_\_\_\_ mm \_\_\_\_\_ in

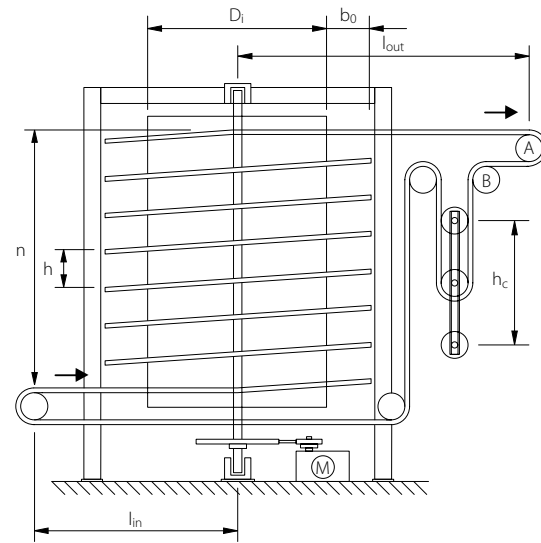

## Drum design

- ☐ Drum cylinder made with metal sheet-jacket  
☐ With closed sheets ☐ With perforated sheets

- ☐ Cage = Drum made of vertical bars

Spacing of vertical bars: \_\_\_\_\_ mm \_\_\_\_\_ in

Dimensions of bar profile: \_\_\_\_\_ mm \_\_\_\_\_ in

(Round -> d, square, rectangular  $s_1 \times s_2$ )

### Cage bars

- ☐ Without caps ☐ With caps; material: \_\_\_\_\_

## Room dimensions (indicate if limited)

### Available room max.

Length: \_\_\_\_\_ m \_\_\_\_\_ ft

Width: \_\_\_\_\_ m \_\_\_\_\_ ft

Height: \_\_\_\_\_ m \_\_\_\_\_ ft



MOVEMENT SYSTEMS

## Retrofit data

### Customer requirements/problem description

Indicate the reasons why the customer wants a refit.

#### Product problems

- ☐ Product marked ☐ Product sticks

#### Driving problems

- ☐ Belt jumps, jerky movement ☐ Outer belt edge lifts up

#### Sanitation problems

- ☐ Blackening, black spots ☐ Belt soiled with debris

#### Cleaning problems

- ☐ Frequent cleaning required ☐ Cleaning cycle too long

#### Lifetime too short

- ☐ Belt life time too short ☐ Excessive wear

#### Problem description:

Please describe current problems and also what the customer expects!

---

---

---

#### Tentative time schedule

Realization planned for: \_\_\_\_\_

### Spiral belt

#### Belt-type to be replaced

- ☐ Steel mesh belt ☐ Plastic modular belt  
☐ Hybrid belt (SS & plastic)

#### Manufacturer

Company name: \_\_\_\_\_

#### Belt specification

Product name/code/type: \_\_\_\_\_

Pitch: \_\_\_\_\_ mm \_\_\_\_\_ in

Belt material: \_\_\_\_\_

#### Current condition of belt

- ☐ In good condition ☐ Belt worn, old  
☐ Stretched, partly deformed ☐ Belt fractured, partly broken

#### Required accessories

- ☐ Friction modules ☐ Flights/Profiles  
☐ Nub top ☐ Radius expansion tabs S9

Additional details: \_\_\_\_\_

### Spiral conveyor

#### Current condition of spiral general impression

Manufacturer: \_\_\_\_\_

Year of construction: \_\_\_\_\_

- ☐ In good condition, clean ☐ weak, deformed  
☐ Poor maintenance, dirty ☐ worn, damaged

#### Belt drive position

- ☐ A: Sprocket on belt backside ☐ B: Sprocket on belt topside

### Carry way: Belt support


Number of belt supports x: \_\_\_\_\_

Spacing between supports  $b_1$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Distance belt edge – outside support  $b_a$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Support-rail thickness  $s_r$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Support-rail height  $h_r$ : \_\_\_\_\_ mm \_\_\_\_\_ in

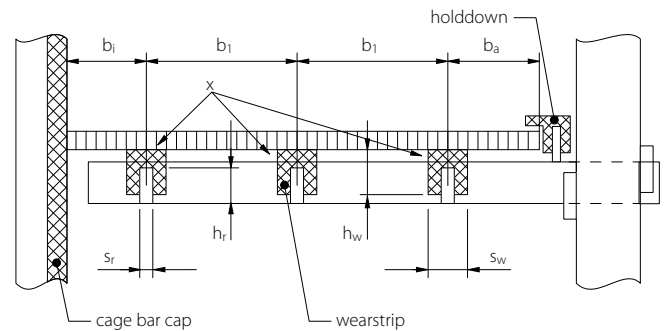

### Wear strips (carry way)

Profile: \_\_\_\_\_

Height  $h_w$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Width  $s_w$ : \_\_\_\_\_ mm \_\_\_\_\_ in

Material:

- ☐ HDPE or UHMW (min PE 500) ☐ Other: \_\_\_\_\_

Condition:

- ☐ In good condition, usable  
☐ Needs immediate replacement

**Remark cage bars:** Please fill in position "drum design" on previous page.

### Cage bar caps

Profile: \_\_\_\_\_

Material:

- ☐ HDPE or UHMW (min PE 500) ☐ Other: \_\_\_\_\_

Condition:

- ☐ In good condition, usable ☐ Worn, scratched  
☐ With defects (gaps, gauges, etc)

### Hold downs

- ☐ No hold downs installed ☐ Safety belt flip up present

Location:

- ☐ Outside belt edge ☐ Inside belt edge

Type:

- ☐ Continuous guide ☐ Several shoes

**Take-up roller:** Please see spiral sketch on previous page.

### Compensation for belt elongation

Number of take-up rollers: \_\_\_\_\_

If design differs from "Main dimensions of spiral" on previous page:

Estimate compensation way: \_\_\_\_\_ m \_\_\_\_\_ ft

#### Forbo Siegling GmbH

Lilienthalstraße 6/8, D-30179 Hannover

Phone +49 511 6704 0


www.forbo-siegling.com, siegling@forbo.com



MOVEMENT SYSTEMS



## 6.7 NOTES

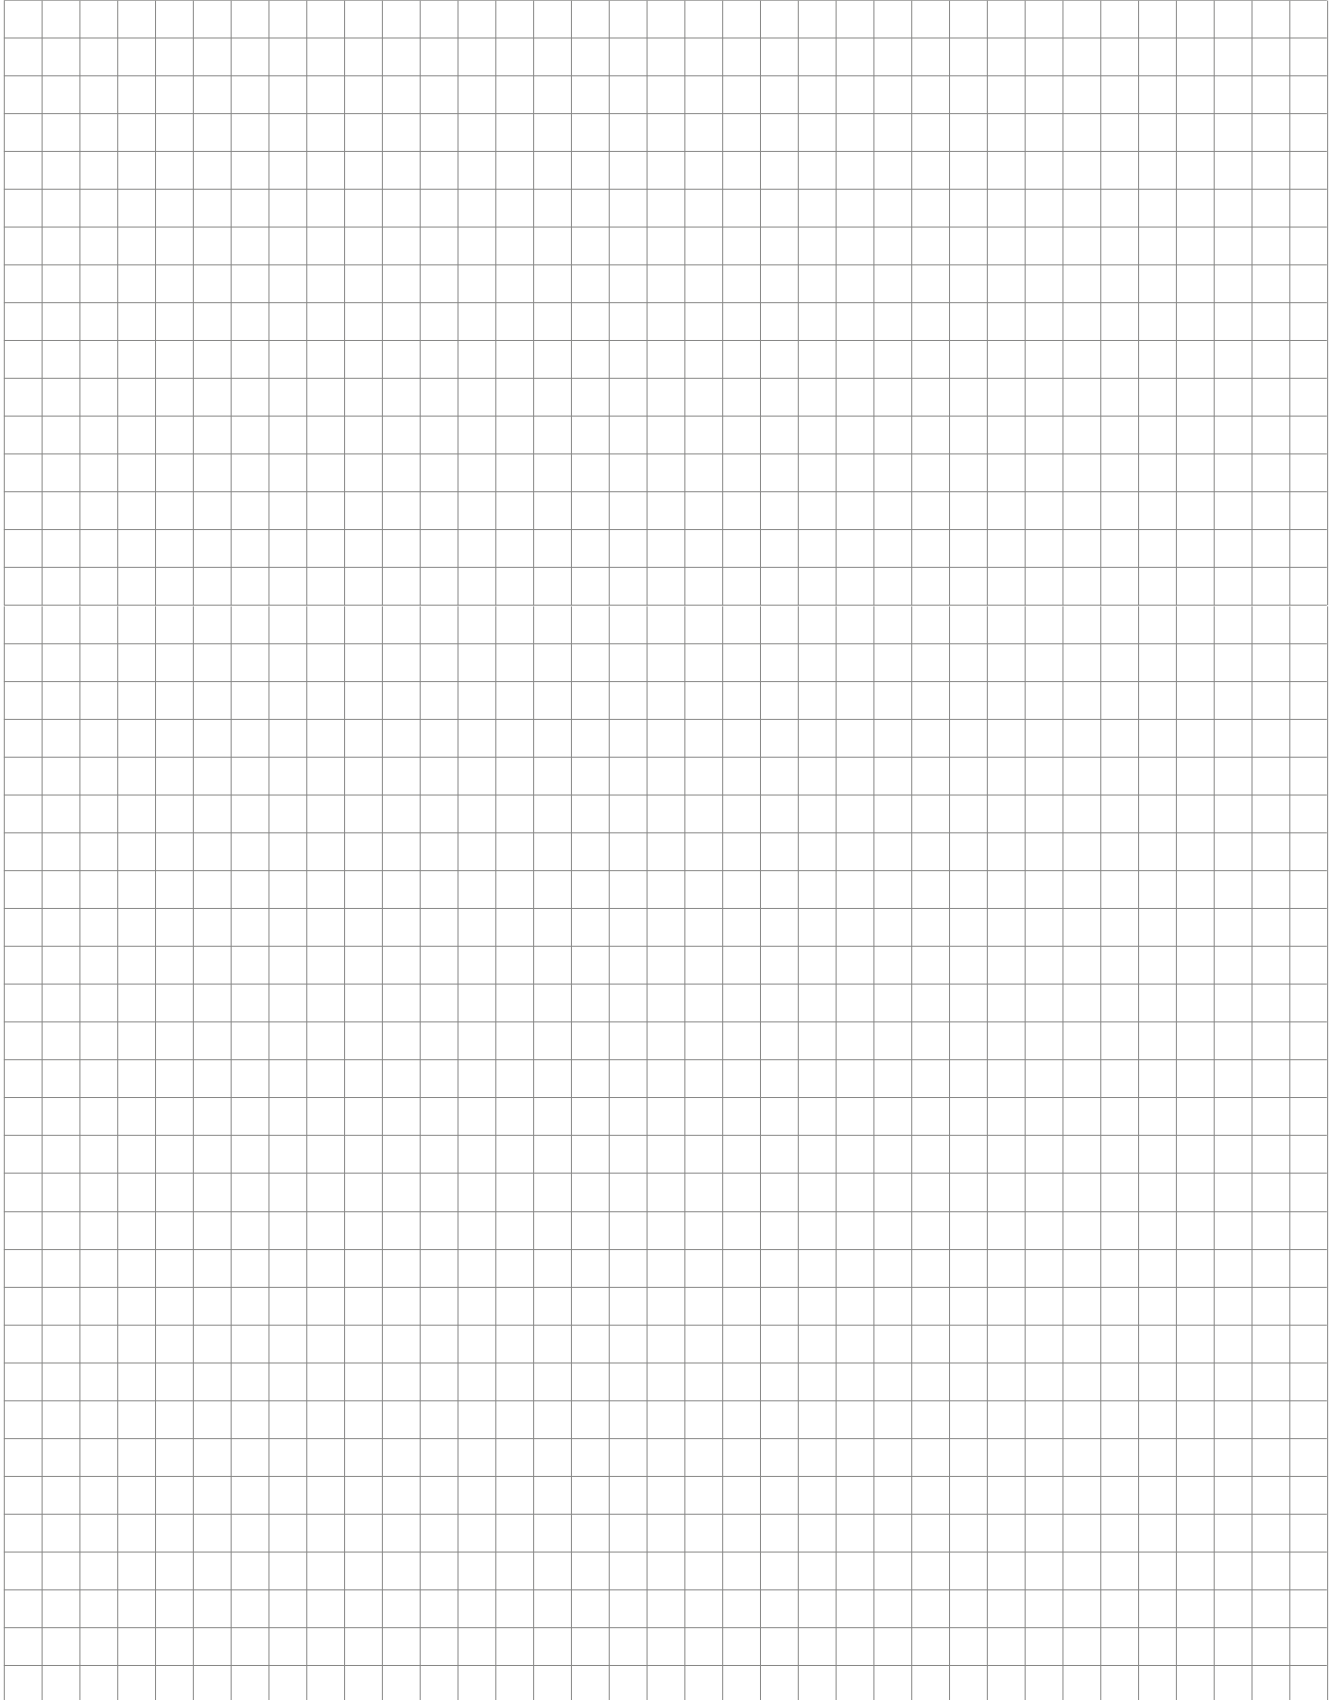

## 6.8 LEGAL NOTES

Forbo Siegling GmbH ("Forbo") provides this Engineering Manual for information purposes only. While Forbo endeavors that its recommendations, operating instructions, details and information on suitability and use of our products are as accurate and complete as possible, Forbo does not make any representation or warranty of any kind whatsoever, neither expressed nor implied, with respect to any information contained in this Engineering Manual unless otherwise expressly set forth in writing by duly authorized representatives of Forbo. It is your sole responsibility to perform appropriate testing of our products and their merchantability and fitness for a particular purpose, and Forbo does not accept any liability for any damages, including but not limited to property damages and personal injury, in connection with your reliance on any information contained in this Engineering Manual or any technical and/or other support which Forbo may have provided to you.

This Engineering Manual is Forbo property. Any reproduction, transmission or other use of this Engineering Manual or part(s) thereof is only permissible with Forbo's written consent.

Forbo reserves the right to modify the content of this Engineering Manual at any time and without prior notice to you. The latest version of this Engineering Manual can be downloaded from our website at [www.forbo.com/movement/en-gl/](http://www.forbo.com/movement/en-gl/).

## Siegling – total belting solutions

Committed staff, quality oriented organization and production processes ensure the constantly high standards of our products and services.

Forbo Movement Systems complies with total quality management principles. Our quality management system has ISO 9001 certification at all production and fabrication sites. What's more, many sites have ISO 14001 environmental management certification.



Ref. no. 888-2  
04/25 - GB - Reproduction of text or parts thereof only with our approval. Subject to change.



### Our service – anytime, anywhere

Forbo Movement Systems employs around 2,500 people in its group of companies. Our products are manufactured in ten production facilities across the world.

You can find companies and agencies with warehouses and workshops in over 80 countries.

Service points are located in more than 300 places worldwide.

#### Forbo Siegling GmbH

Lilienthalstrasse 6/8, D-30179 Hannover

Phone +49 511 6704 0

[www.forbo-siegling.com](http://www.forbo-siegling.com), [siegling@forbo.com](mailto:siegling@forbo.com)



MOVEMENT SYSTEMS