

## Product quick info

**PD2+ U30 MT-NA-HACCP blue  
FDA**

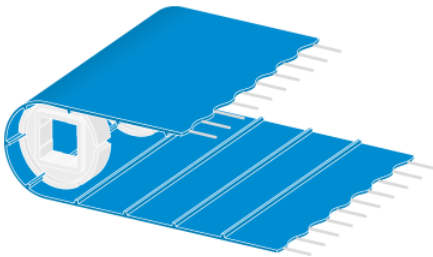
Sketch of cross-section (not actual size)

**Applications**

- Processing of fatty and oily foods
- Processing of unpackaged food
- Meat, poultry, fish, bakery and confectionery industries
- Agricultural and dairy applications

**Properties/Advantages**

- Form-fit sprocket drive PD2; profile height 5 mm, pitch 49.9 mm
- Cord reinforced homogenous belt for higher load (no elongation)
- Smooth running
- Matte surface top face (MT): Optimal accumulation and optimal product release
- HACCP design, easy to clean
- Aramid cords reinforced homogenous belt for higher load (no elongation)
- Suitable for simple conveyor designs => alternative to plastic modular belts
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW 370

**Basic technical data**

Top face	Polyurethane, matte
Underside	Polyurethane, Positive Drive (PD2)
Article no.	640010
d <sub>min</sub> [mm]	95
Thickness (deck) [mm]	3
Total thickness [mm]	8
k <sub>1%</sub> relaxed [N/mm width]	9
Weight [kg/m <sup>2</sup> ]	4.1
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2024  
FMS - Reproduction of text or parts thereof only  
with our approval. Modifications reserved.

Forbo Siegling GmbH  
Lilienthalstrasse 6/8, D-30179 Hannover  
Phone +49 511 67 04 0  
www.forbo-siegling.com, siegling@forbo.com