

UNDERLAYER

IMPORTANT

Sarlibase TE

Ref. : TE13

Reinforced PVC compact underlay.


For subfloors with humidity (DTU 53.12 requirements) and old subfloors (tiles, wood, asbestos-covered or non-asbestos-covered vinyl tiles).

Looselaid system with 3 to 5 mm perimeter clearance, studs on the subfloor and staggered joints with the floorcovering.

The floorcovering is adhered to the underlayment as described in the Avis Technique.

When used on subfloors with humidity, the underlayment allows moisture-laden air to circulate under the system (underlayment + covering). System under Avis Technique.

Length 35 m - Width 2 m - Thickness 1,5 mm

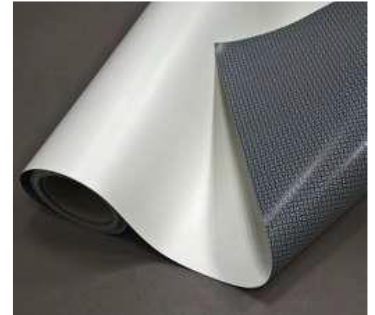

Sarlibase Lisse

Ref. : TELIS

Compact, reinforced PVC underlay.

For old substrates (tiles, wood, asbestos-covered or non-asbestos-covered vinyl tiles).

Floating installation on substrate.

Allows flexible flooring to be laid without direct bonding to the substrate.

Installation with sharp joints staggered with the joints of the floorcovering.

Length 35 m - Width 2 m - Thickness 1,1 mm



Sarlibase Acoustic

Ref. : TEAC

Reinforced PVC foam underlay.

Acoustic attenuation $\Delta L_w = 18$ dB.

For subfloors with humidity.

Provides soundproofing in combination with a defined resilient floor covering.

Fully bonded to substrate with acrylic adhesive.

Length 35 m - Width 2 m - Thickness 2 mm



Allura click 15 dB underlayer

Ref. : U54002

The Allura click 15 dB underlayer was designed specifically to be laid floating under Allura Click Compact flooring. As a high-quality system for reducing impact sound and walking noise, this underlay was developed to protect interlocking devices of different flooring systems and is supplied in rolls for convenience. It can be installed on the old subfloor. This underlay will be installed, preferably, perpendicularly of the allura click row installation with the bright part visible.

N.B : The underlay 15dB is ready to use without protective film to remove.



Length 10 m - Width 1 m - Thickness 1,50 mm

Forbo Foam

Ref. : 6666

Can be associated with Quickfit and Marmoleum click.
Polypropylene foam laminated with metallized polypropylene foil (vapor barrier).

Easy installation with integrated self-adhesive strips for joining the underlayment strips.

Permeability of water vapor less than to 0.46 g/m²/24h.

Impact noise insulation.



Length 25 m - Width 1 m - Thickness 4,5 mm

Quick Fit

Ref. : 4444

MDF panels

Installed with 2 layers of self-adhesive panels.

3 mm thick, adhesive side up.

4 mm thick, adhesive side down.

Can be used for floating installation over an old subfloor (under certain conditions), especially for temporary installation.

Must be finished with a flexible floorcovering.



10 panels of 120 x 60 cm (namely 3,6 m²/box)

SKIRTINGS

SUGGESTED

Ventilated skirting

PVC skirting.


It can be used with a system combining Sarlibase TE and compatible floorcovering, as well as with the Modul'up TE system.

Installation takes place after the floorcovering has been installed.

The base* of the ventilated skirting can be glued or screwed to the wall before the ventilated skirting is installed.

To ensure perfect adhesion, we recommend using a rubber tile hammer to avoid breaking the skirting.

It is also possible to assemble the base and body of the skirting together to install it as a single piece on the wall, using mounting adhesive type 232 eurosol montage.

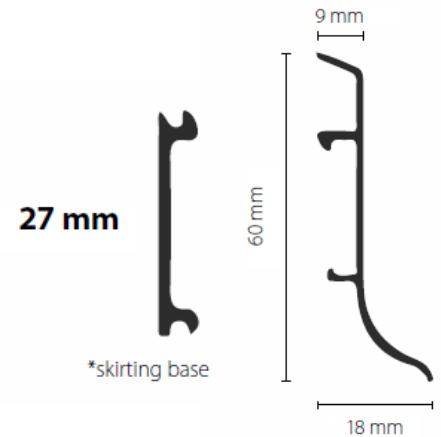

Box of 20 lengths of 2 m namely 40 m/box



FLOORCOVERING PROTECTION

SUGGESTED

Protect & ProtecV

Protect (in Textile) and ProtecV (in Vinyl) protection are non-compliant floorcovering to be used as a floorcovering. This product has to be used only as floor protection.

Has to be looselaid on the floorcovering installed, this floor protection will protect the new floorcovering against scratches and possible deterioration of site life before delivery of the project.

Protect & ProtecV are re-usable.



Protect and ProtecV : order by m²

Protection paper

Ref. : 344

Protective kraft paper that can be loosely applied to newly installed flooring to protect it from scratches and damage before delivery.

Sheet of 75m² (Sheet width in 120 cm or 140 cm depending on the availability. The total surface will be 75 m² in both cases).



MAINTENANCE

SUGGESTED

888 Euroclean Uni

Ref. : 888

Neutral detergent cleaner for daily and occasional maintenance on all types of factory-protected floorcoverings. Effectively removes stubborn dirt. Dries streak-free without buffing.

Technical characteristics :

pH = 7 (neutral)

Consumption : 40 to 100 ml diluted in 8 Liters of water

Drying time : min 30 minutes

Bucket of 5 Liters



891 Euroclean Basic

Ref. : 891

Water-based alkaline detergent cleaner for periodic maintenance or reconditioning, to be combined with a red disk. Not suitable for automatic scrubbers. Universal basic cleaner also suitable for linoleum.

Technical characteristics :

pH = 9.5 (alkaline)

Consumption : dilution 1:5 up to 1:3 depending of the dirt

Exposure time : min 10 minutes

Bucket of 10 Liters

