



Linoleum Pinboard Linoleum

# bulletin board®

creating better environments

**forbo**

FLOORING SYSTEMS

# The all natural pinboard solution to hold your thoughts

Longlasting  
and strong



Practical  
and easy



Resilient  
and flexible

Versatile and  
colourful

Sustainable



Hygienic and  
bacteriostatic



# bulletin board®



6.0 mm



122 cm | \* also 183 cm



2208 | mushroom medley NCS 5005 - Y50R  
LRV 21




2206 | oyster shell NCS 3502 - Y  
LRV 43



2210 | hot salsa NCS 3560 - Y90R  
LRV 11




2187 | brown rice NCS 4010 - Y30R  
LRV 34

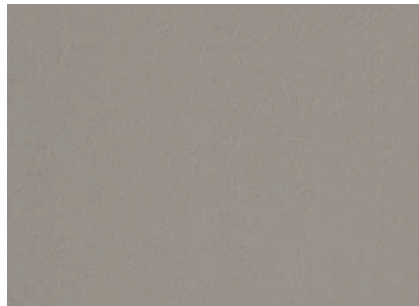

2182 | potato skin \* NCS 4005 - Y20R  
LRV 28




2211 | tangerine zest NCS 2070 - Y60R  
LRV 20

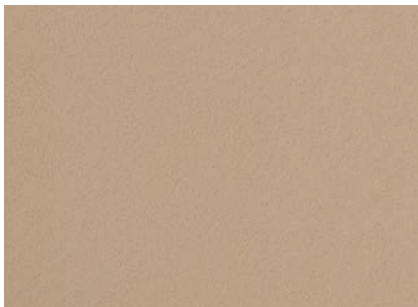


2186 | blanched almond \* NCS 3020 - Y20R  
LRV 34




2162 | duck egg NCS 5005 - B80G  
LRV 25

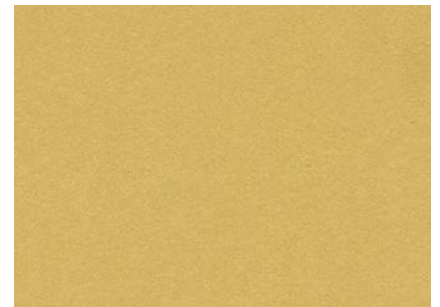

2212 | fresh pineapple NCS 3030 - G90Y  
LRV 40

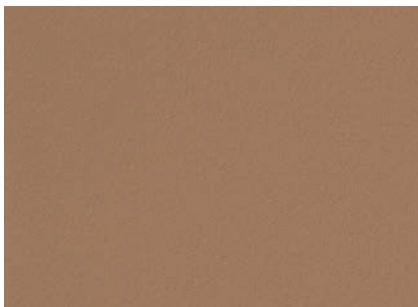

2166 | nutmeg spice \* NCS 4030 - Y30R  
LRV 22

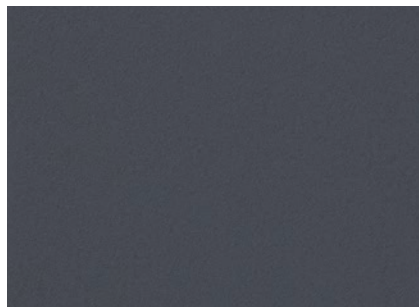


2204 | poppy seed NCS 6500 - N  
LRV 16




2213 | baby lettuce NCS 4030 - G30Y  
LRV 23



2207 | cinnamon bark NCS 4040 - Y50R  
LRV 18

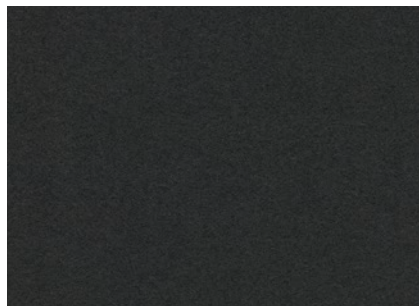



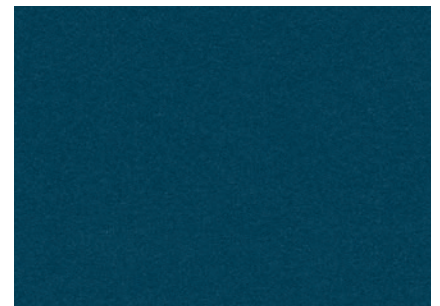







2209 | black olive NCS 9000 - N  
LRV 5



2214 | blue berry NCS 6030 - B  
LRV 6



# Technical specifications

	Total Thickness	EN-ISO 24346	6.0 mm ± 0.25 mm
	Roll Width	EN-ISO 24341	1.22 m (3 colours in 1.83 m)
	Roll Length	EN-ISO 24341	≤ 28 m
	Total Weight	EN-ISO 23997	4.7 kg/m <sup>2</sup> ± 10%
	Flexibility	EN-ISO 24344	Ø 50 mm, according to method A
	Sound absorption coefficient	EN-ISO 354	$\alpha_w$ 0.1 (typical)
	Thermal conductivity	EN 12524	0.10 W/m-K
	Self-healing properties	LH000420	yes
	Force on pins - Perpendicular to pin direct	LH000421	25 N (typical)
	Force on pins - Perpendicular to pin at 7 mm	LH000421	10 N (typical)
	Force on pins - Parallel to pin (pulling the pin out)	LH000421	15 N (typical)
	Bacteriostatic properties	EN-ISO 22196	yes
	Chemical resistance	EN-ISO 26987	Resistant to diluted acids, oils and the most conventional solvents such as alcohol, white spirit, etc. Not resistant to prolonged exposure to alkalis.
	Dimension stability		Due to the natural jute back, providing a strong durable foundation, the product is dimensionally stable in all directions when properly installed. It resists cracking, drying and peeling.
	Anti-static		yes
	Gloss		Only available in matt colors, so that reflection caused by sunlight or artificial light is reduced.
	Natural materials (e.g. cork, linseed oil, jute)		91%
	Recycled content		43%
	PVC, PET, plasticizers content		0%

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.  
All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.



## Belgium

Forbo Flooring  
t Hofveld 4B 001  
1702 Groot-Bijgaarden  
T: + 32 2 464 10 10  
F: +32 2 464 10 11  
info.belgium@forbo.com  
www.forbo-flooring.be

## China

Forbo Shanghai Co., Ltd.  
Room 2302,  
Golden Magnolia Plaza West Building  
No.1 Da Pu Road  
Shanghai 200023  
T: +86(21)64734586  
F: +86(21)64734757  
www.forbo-flooring.com.cn

## Denmark

Forbo Flooring A/S  
Produktionsvej 14  
2600 Glostrup  
T: 44 92 85 00  
F: 44 92 85 20  
info.denmark@forbo.com  
www.forbo-flooring.dk

## Portugal

Forbo-Revestimentos, SA  
Zona Industrial da Maia I, Sector VII  
Tv. Eng. Nobre da Costa, 87  
Apartado 6091  
4476-908 Maia  
T: +351 229 996 900  
F: +351 229 996 909  
info.revestimentos@forbo.com  
www.forbo-flooring.com.pt

## The Netherlands

Forbo Flooring B.V.  
Postbus 13  
1560 AA Krommenie  
T: (075) 647 78 80  
F: (075) 628 37 71  
contact@forbo.com  
www.forbo-flooring.nl

## Other countries

Forbo Flooring B.V.  
P.O. Box 13  
1560 AA Krommenie  
The Netherlands  
T: +31 75 647 74 77  
F: +31 75 647 77 01  
contact@forbo.com  
www.forbo-flooring.com

Find us on

