

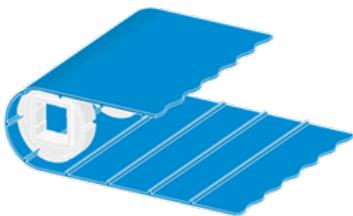
## Product quick info

**PD2 U30 MT-NA-HACCP BL  
FDA**

Sketch of cross-section (not actual size)

**Applications**

- Standard belt for food conveying
- Accumulation belt / Discharge belt
- Processing of fatty and oily foodstuffs
- Processing of unpackaged foodstuffs
- Meat, poultry, fish, bakery and confectionery industries
- Agricultural and dairy applications

**Properties/Advantages**

- Homogenous belt
- Form-fit sprocket drive PD2; profile height 5 mm, pitch 49.8 mm
- Cord reinforced homogenous belt for higher load (no elongation)
- Smooth running
- HACCP design, easy to clean
- Optimal accumulation and product release
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW

**Basic technical data**

Top face	Polyurethane, matte
Underside	Polyurethane, Positive Drive
Article no.	640007
d <sub>min</sub> [mm]	60
Total thickness [mm]	3.0/8.0
k <sub>1%</sub> relaxed [N/mm width]	1.75
Weight [kg/m <sup>2</sup> ]	4.5

Permitted operating temperature [°C] -10 to +70

Product Quick Info | EN | 01.2026  
FMS · Reproduction of text or parts thereof only  
with our approval. Modifications reserved.

Forbo Siegling GmbH  
Lilienthalstrasse 6/8, D-30179 Hannover  
Phone +49 511 67 04 0  
[www.forbo-siegling.com](http://www.forbo-siegling.com), [siegling@forbo.com](mailto:siegling@forbo.com)