

# VINYL SHEET ACCESSORIES

## Adhesives

► MANDATORY



	Adhesive	Weight	Cons. m <sup>2</sup>	Spatula	Waiting time	Opening time	Observations
Sarlontrafic Sarlon habitat Sarlon primeo	<b>522 Eurosafetack / 622 Eurostar tack</b>	13 kg	250 g	A2	20 min	90 min 60 min	622 is a more ecological version of the 522
Sarlonprimeo compact Eternal	<b>528 Eurostar all round</b>	13 kg	250 g	A2	15 min	40 min	Construction adhesive EMICODE EC1 <sup>PLUS</sup> , multi-purpose
Surestep/ Safestep Sphera	<b>644 Eurostar multiplus</b>	12 kg	190 - 270 g	A1/A2	10 min	60 min	Fiber-reinforced universal adhesive, EMICODE EC1 <sup>PLUS</sup> . High performance
Sarlon marche complète	<b>840 Eurotape doubletack</b>	Dimension : 240mm x 25m	0,5 m		0 min		Double-sided adhesive tape with elastic, dimensionally stable woven backing, very high initial and final adhesion
Specific Subfloors High traffic	<b>140 Euromix PU</b>	13,4 kg	450 - 650 g	A2			Two-component, PU-based adhesive for specific subfloors, EMICODE EC1 <sup>PLUS</sup>

## Welding

► IMPORTANT

### PVC welding rod

Welding allows the junction between strip edges. Achieves E2/ E3 rating with PVC. A groove is formed, and the weld is then applied using a hot air gun fitted with a PVC fast-welding nozzle.

Coil of 50 m (Sarlon, Surestep, Eternal, Sphera)



### Estimative consumption of welding rods:

Sheet floorcovering without coving skirting : approx. 0,75 m/m<sup>2</sup>

Sheet floorcovering with coving skirting : approx. 1 m/m<sup>2</sup>



## Profiles


► IMPORTANT

### Cove former

- 3009 = 15 x 15 : this profile is used vertically in internal corner to that the wall covering matches corners perfectly.
- 3109 = 20 x 20: this profile is used at the bottom of partitions. Provides backing for the flooring to rise with a rounded profile, thus making corners last longer and improving aesthetics, while preventing perforation.
- 3209 = 25 x 25 : same using as the 20x20 profile but more appropriate for rigid floorcovering.

Box of 20 lengths of 2,5 m namely 50 m/box.

Ref. : 3009 blanc / 3109 noir / 3209 noir



## PVC capping profile EL3.5

PVC capping strip is the right finishing profile when you would like to have a perfect finishing with coving installation. Ideal for PVC floorcovering.


**Box of 20 lengths of 2,5 m namely 50 m/box**



## Stairnosing to install before and after floorcovering

Phosphorescent PVC stairnosing with structured support to be installed before (xxxxTF) or after (xxxxTK) the floorcovering is laid.

**Box of 10 lengths of 2,5 m namely 25 m/box**

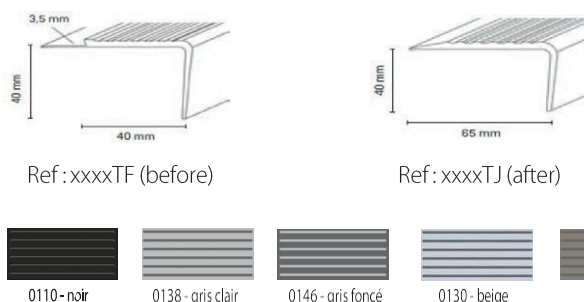


## Skirtings

► RECOMMENDED

### Soft complete skirting for old and new support

Flexible finishing profile for corner support and finishing. Its flexibility makes it suitable for both new and old substrates.

**Box of 20 lengths of 2,5 m namely 50 m/box**

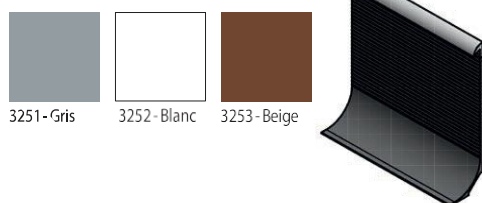

### Decorative skirting

Semi rigid PVC skirting available in 3 heights: 60, 80 and 100 mm.

- In 60 mm, they are mainly proposed for residential and for places with low and medium traffic areas.
- In 80 mm, they are used in renovation to replace old skirtings with a lower height.
- In 100 mm, they are recommended for schools and hospitals.

**Box of 20 lengths of 2,5 m namely 50 m/box**

Please indicate, during your order, the height requested with the reference. Example: 1940-80 (blanc 1940 height 80 mm)




### HDF CUBU 80 skirting

HDF skirting coated with chlorine-free <polyblend, PP/TPE base, with flexible lips on floor and wall. Straight edge finish.

- Soft lips on wall and floor.
- Robust surface.
- Mitre tool cut-outs, without pre-formed accessories.

**Box of 10 lengths of 2,5 m namely 25 m/box**

Ref : xxxxCU80

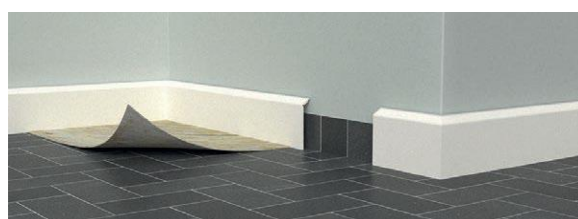

### PVC recover skirting

Solid-colored rigid PVC skirting. Especially designed to adapt to different thicknesses and heights:

- Up to 14 mm thickness
- Up to 100 mm (two parts, each 20 mm long, can be broken off).

**Box of 20 lengths of 2,5 m namely 50 m/box**

