Allura decibel 0.35



ow emission interior materials







LVT Luxury Vinyl Tiles - tackified loose lay

Tackified loose lay LVT 100% made in France and phthalate free.


With tackified installation and high quality dimensionally stable tiles and planks, the floor covering is available in a range of natural wood designs and a selection of concretes and modern stones designs.

This heterogeneous printed PVC floor covering has a 0,35 mm thick wear layer. It is available in tiles of 50 x 50 cm or 100 x 100 cm and in 4 sides beveled planks of 16,6 x 100 cm, 20 x 100 cm and 20 x 120 cm.

The floor covering will offer a residual indentation of 0.12 mm, a dimensional stability \leq 0.05% and an impact sound reduction of 19 dB.

The Overclean wear layer facilitates maintenance and avoid any surface metallisation or maintenance by spray method throughout the product's lifetime.

The product has a 7-year warranty (+ 6 years with installation of Forbo's Coral or Nuway entrance mats).

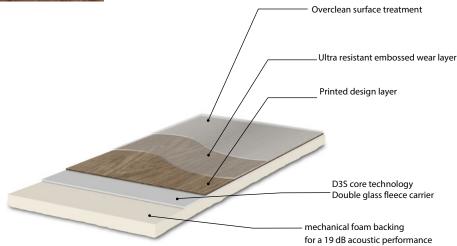

| Technical specifications | |
|--------------------------|--|
| Commercial name | Allura decibel 0.35 |
| Total thickness | 3,15 mm |
| Wearlayer | 0,35 mm |
| Total weight | 2 300 g/m ² |
| Impact sound reduction | $\Delta L_w = 19 \text{ dB}$ |
| Residual indentation | ≤ 0,12 mm |
| Reaction to fire | C _{fl} -s1 (2019/151-1 CRET) |
| Commercial use | 32 |

Environmental datasheet

- Forbo environmental datasheet is available on Forbo's website



- Phthalate free

- TVOC emission rate < 10 $\mu g/m^3,$ class A+ (best class in health safety labelling)

- Free from all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); compliant with European REACH regulation

- 100% recyclable