



Technical Bulletin - Cove Ezi Australian Pre-formed Marmoleum Coving with Forbo Warranty

Cove - Ezi is a manufactured Marmoleum pre-formed coving which has an integrated profile support backing. Cove - Ezi is suitable for all Marmoleum coving installations including combination stair treads and risers

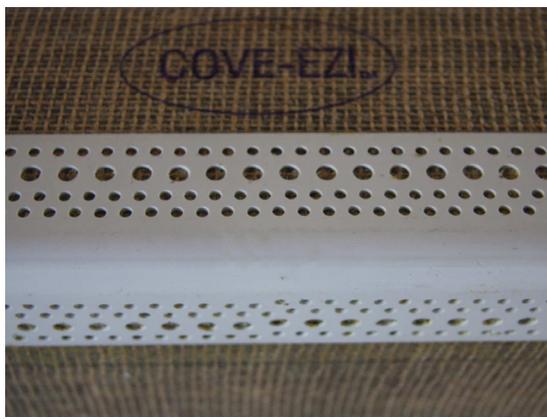

Cove-Ezi support backing

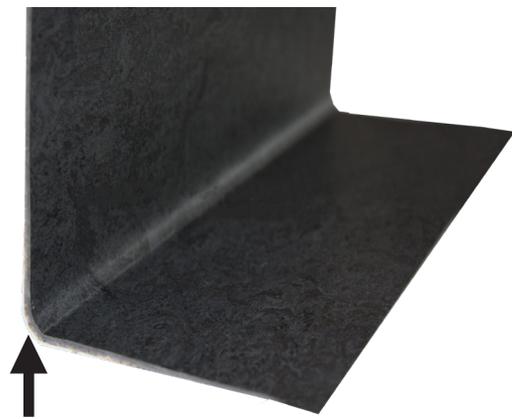

Cove-Ezi is strengthened against cleaning machine impact damage.

The benefits of Cove - Ezi

1. Cove - Ezi offers ease of installation, speed, cost effectiveness and the opportunity for the designer to use a coloured boarder offset to that of the field colour. A contrasting coloured welding cable could then be used as a design element around the perimeter of the installation.
2. Cove -Ezi can be manufactured to order in various cove heights and base widths in 2.40 Lm lengths
3. Cove - Ezi can be manufactured to accommodate separate internal and external corners
4. Cove - Ezi can be manufactured to order in the complete Marmoleum colour range
5. Cove - Ezi is cleaning machine bump resistant, avoiding mechanical damage
6. Cove - Ezi is stair riser toe kick resistant, avoiding mechanical damage
7. Cove - Ezi has a 10 mm cove base radius which gives it strength and uniform neatness against door jambs and other internal and external protrusions.


Note: Cove - Ezi has minimum order requirements for lengths, varying cove heights and base widths. Under certain reflected light situations an indistinct mirrored shadow line of the support backing may be seen; this is not a manufacturing fault



Cove-Ezi Marmoleum Internal Corner



Cove-Ezi Marmoleum Straight Length

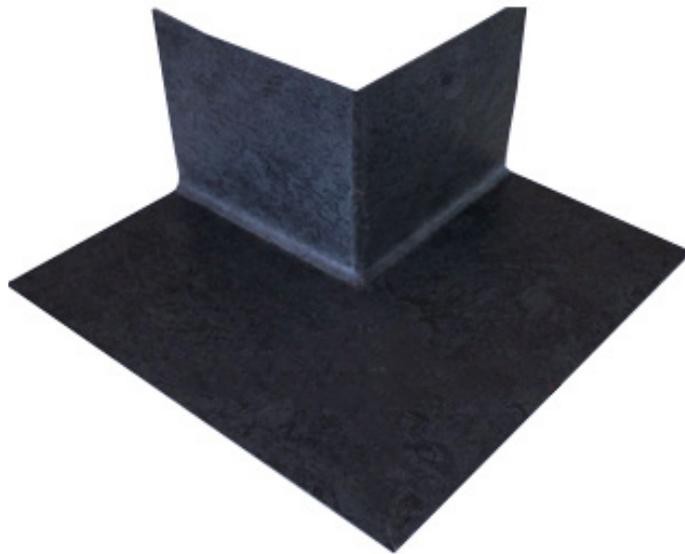

Cove-Ezi Marmoleum External Corner

Cove - Ezi Installation

1. Cove - Ezi should be unpacked and acclimatised at 18 degrees C as per AS 1884-2012 recommendations.
2. Cove - Ezi lengths should be laid out with the jute side and support backing facing upwards in the form of a tent or stacked in multiple lengths one on top of the other, in this way it will help to alleviate some tension brought about by the packaging, storage and freighting process.
3. Cove - Ezi can be installed **using high solid contact adhesives**, sprayed, rolled or painted on. In most cases **two coats of adhesive should be applied** to the cove backing to achieve a thick adhesive build up. Low solid skirting contact adhesive should not be used as some adhesive solids will be lost / absorbed into the Marmoleum back and have an inferior adhesive build up.
4. For areas of installation where solvent base adhesives cannot be used Forbo Eurocol 650 water based contact is ideally suited.
5. Cove - Ezi can also be installed using Forbo Fix 414, brushed, rolled or towelled on with a 2.4 x 2.4 mm "V" notch trowel. Please test a small area of coving to familiarise yourself when using either Forbo adhesives.

If in any doubt contact us:

Tel: 1800 224 471

Info.au@forbo.com

Additional Reference documents and information:

Forbo Floor Coverings Installation Guide: www.forbo-flooring.com.au/installation