


EXCERPT FROM PROLINK ENGINEERING MANUAL

02/22 (Ref-No. 888)

siegling prolink
modular belts

SERIES 18

Side flexing and spiral belts
Pitch 25.4 mm (1 in)

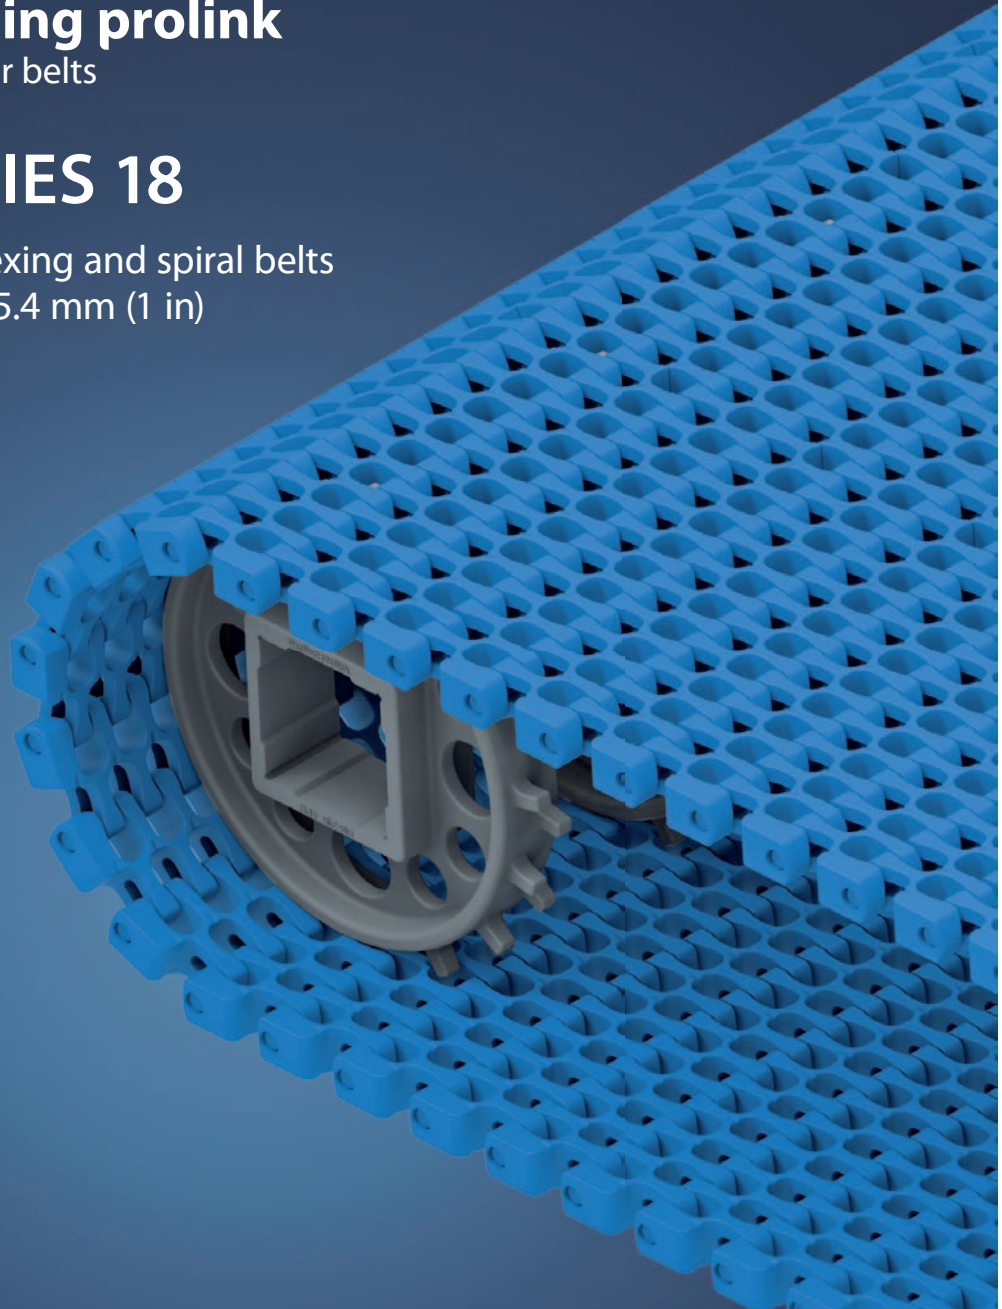

Forbo Siegling GmbH
Lilienthalstraße 6/8, D-30179 Hannover
Phone +49 511 6704 0
www.forbo-siegling.com, siegling@forbo.com

Ref. no. 888-2_1.2_S18


SERIES 18 | OVERVIEW

siegling prolink
modular belts

Side flexing and spiral belts | Pitch 25.4 mm (1 in)

Belts for light to medium-duty food and non-food applications

Side view scale 1:1



Design characteristics

- All plastic light weight belt suitable for both straight and radius conveying
- 44% open area for excellent air circulation and drainage
- Narrow grid structure of the belt ensures secure handling of even small products
- High curve belt pull capacity offering improved capacity and reliability
- Easy to clean and suitable for conveying of food including direct food contact
- Superior lateral stiffness and rigidity for an all plastic belt

Basic data


Pitch	25.4 mm (1 in)
Belt width min.	149.4 mm (5.88 in)
Belt width max.	1219 mm (48 in)
Width increments	12.7 mm (0.5 in)
Hinge pins	4.2 mm (0.17 in) made of plastic (PLX, PP). One-piece up to a belt width of 1219 mm (48 in).

Sprockets

in different sizes with round or square sprocket bore




Available surface pattern and opening area




S18-44 GRT 2.2

Open (44%), lattice-shaped surface




S18-44 GRT 2.2 G

Open (44%), lattice-shaped surface and Hold Down Tabs




S18-44 HDK 2.2

Open (44%), lattice-shaped surface and High Deck



S18-44 GRT 1.7

Open (44%), lattice-shaped surface



S18-44 GRT 2.2/1.7 CW

S18-44 GRT 1.7/2.2 CCW

Open (44%), lattice-shaped surface
CW = Clockwise (right hand curve)
CCW = Counter Clockwise (left hand curve)
(picture shows CCW)



NSF-compliant from these certified Forbo plants:
Huntersville (USA), Maharashtra (India), Malacky (Slovakia),
NSW (Australia), Pinghu (China), Shizuoka (Japan),
Tlalnepantla (Mexico)




SERIES 18 | BELT TYPES

siebling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 2.2$

S18-44 GRT 2.2 | 44 % Opening | Grid top

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface | Collapse factor (C_c) = 2.2

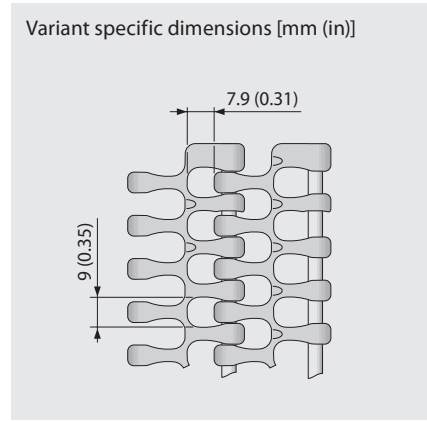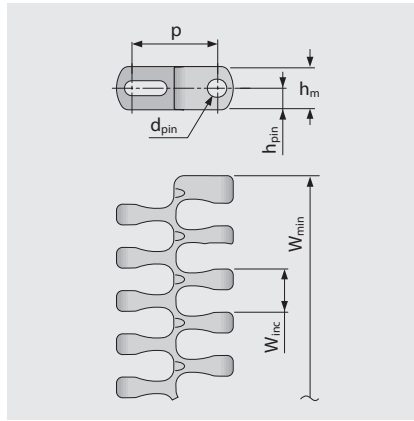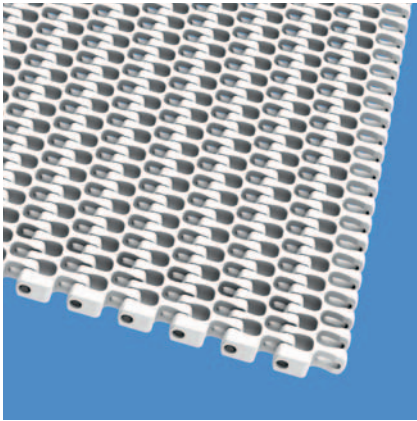

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.4	12.7	±0.2	2.2 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.88	0.5	±0.2	2.2 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●

Mold to order belts

PA*	BL	PLX	BL	25	1713	1500	337	6.9	1.41	0.85	-40/120	-40/248	●	●
-----	----	-----	----	----	------	------	-----	-----	------	------	---------	---------	---	---

* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request



MOVEMENT SYSTEMS




SERIES 18 | BELT TYPES

sieging prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 2.2$

S18-44 GRT 2.2 G | 44 % Opening | Grid top · guided

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface and Hold Down Tabs | Allows utilization of the entire belt width | Collapse factor (C_c) = 2.2

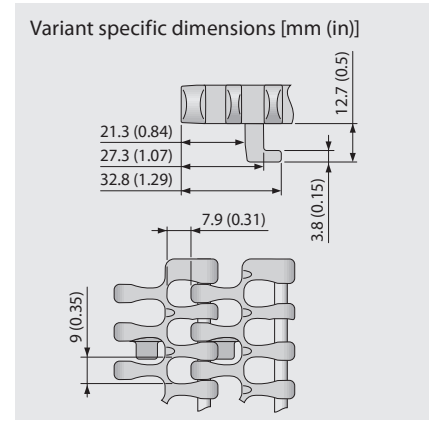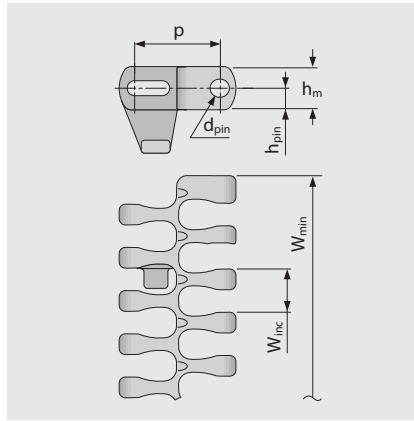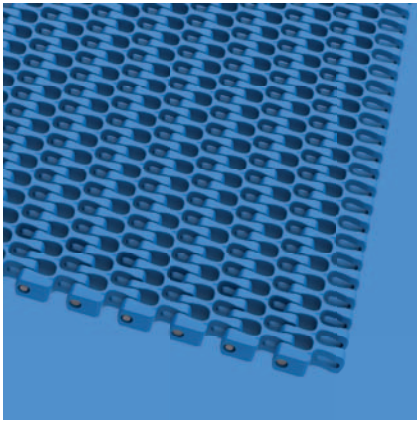

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.4	12.7	±0.2	2.2 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.88	0.5	±0.2	2.2 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve**		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●

Mold to order belts														
PA*	BL	PLX	BL	25	1713	1500	337	6.9	1.41	0.85	-40/120	-40/248	●	●

* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

** will be reduced by G-tab guiding (see chapter 3.3 conveyor layouts)

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request



MOVEMENT SYSTEMS




SERIES 18 | BELT TYPES

siegling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 2.2$

S18-44 HDK 2.2 | 44% Opening | High Deck

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface | Collapse factor (C_c) = 2.2 | Allows utilization of the entire belt width and beyond

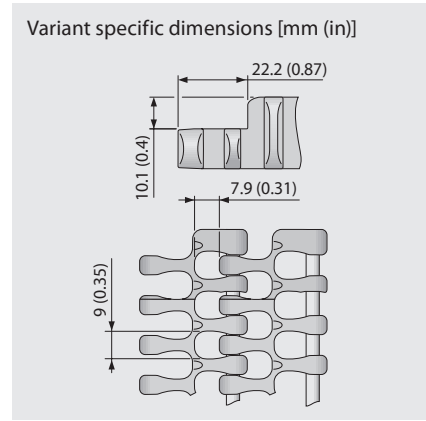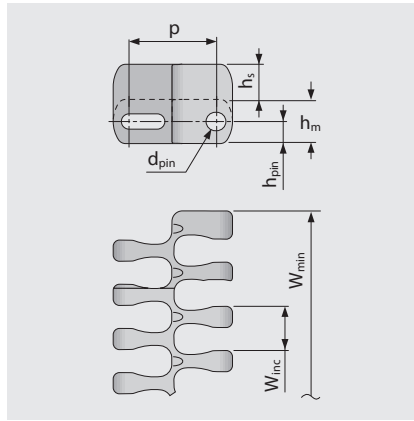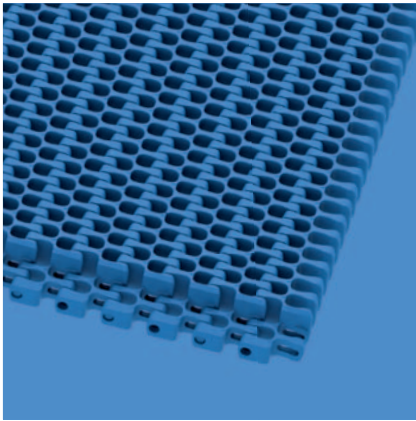

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	10.1	149.4	12.7	±0.2	2.2 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.4	5.88	0.5	±0.2	2.2 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	30	2056	1600	360	15.5	3.17	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	15.5	3.17	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	1000	225	10.3	2.11	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	1000	225	10.3	2.11	0.5	5/100	41/212	●	●
PP	BL	PP	WT	16	1096	800	180	10.2	2.09	0.5	5/100	41/212	●	●
PP	WT	PP	WT	16	1096	800	180	10.2	2.09	0.5	5/100	41/212	●	●
PA*	BL	PLX	BL	25	1713	1500	337	12.6	2.58	0.85	-40/120	-40/248	●	●

* Values valid for dry applications (RH < 50%). Belts in PA material will absorb water in wet environments, causing them to expand and reduce the nominal belt pull capacity.

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence". All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request



MOVEMENT SYSTEMS




SERIES 18 | BELT TYPES

sieging prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 1.7$

S18-44 GRT 1.7 | 44% Opening | Grid top

Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface | Collapse factor (C_c) = 1.7

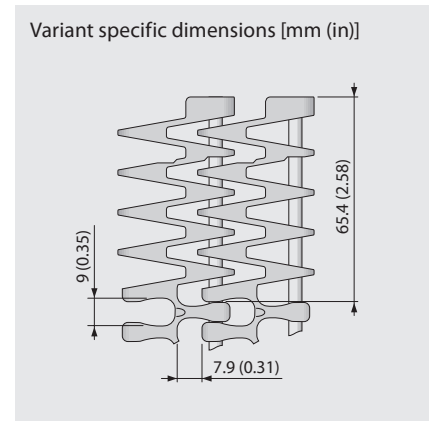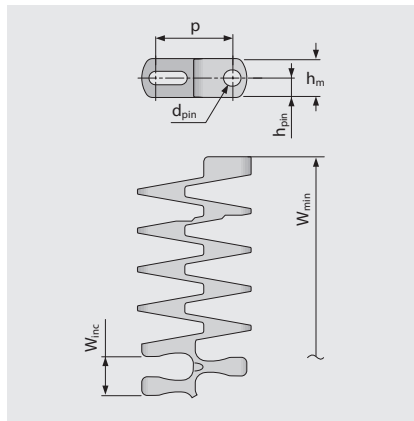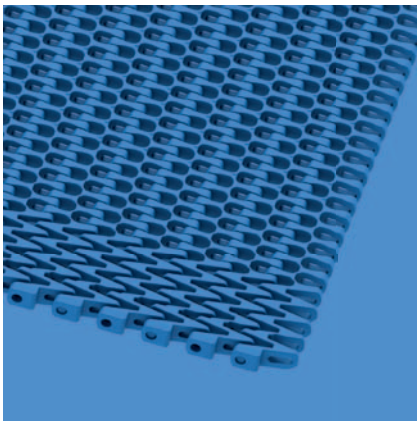

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	174.8	12.7	±0.2	1.7 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	6.88	0.5	±0.2	1.7 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, belt width curve < 403 mm (15.88 in)		Nominal belt pull, belt width curve ≥ 403 mm (15.88 in)		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	25	1713	700	157	900	202	8.4	1.72	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	25	1713	700	157	900	202	8.4	1.72	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	400	90	700	157	5.8	1.19	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	400	90	700	157	5.8	1.19	0.5	5/100	41/212	●	●
PP	BL	PP	WT	16	1096	400	90	600	135	5.5	1.13	0.5	5/100	41/212	●	●
PP	WT	PP	WT	16	1096	400	90	600	135	5.5	1.13	0.5	5/100	41/212	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request



MOVEMENT SYSTEMS




S18 COMBO | BELT TYPES

siegling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 1.7$

S18-44 GRT 2.2/1.7 CW | 44% Opening | Grid top | Clockwise or right hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface | Collapse factor (C_c) = 1.7

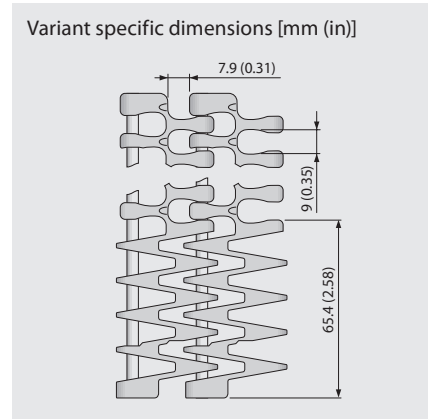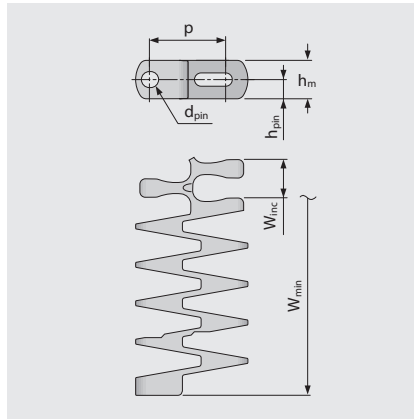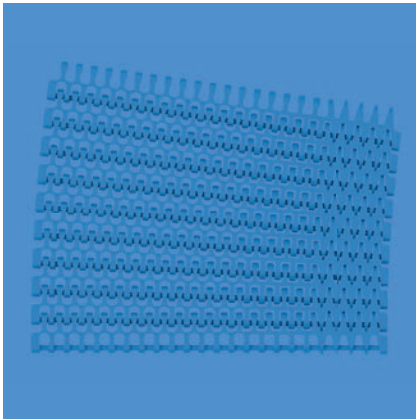

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.4	12.7	±0.2	1.7 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.88	0.5	±0.2	1.7 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request



MOVEMENT SYSTEMS




S18 COMBO | BELT TYPES

siegling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in) | $C_c = 1.7$

S18-44 GRT 1.7/2.2 CCW | 44% Opening | Grid top | Counter clockwise or left hand curve

Combination of high belt pull capacity and small radii in one directional curve layouts | Open area (44%) for excellent air circulation and drainage | 42% contact area (Largest opening: 9 x 7.9 mm/0.35 x 0.31 in) | Lattice-shape surface | Collapse factor (C_c) = 1.7

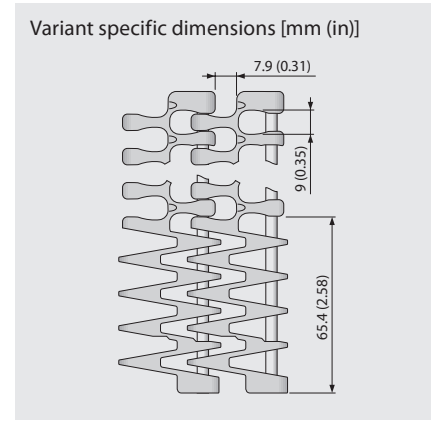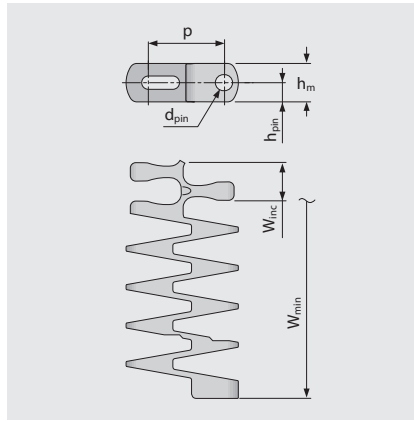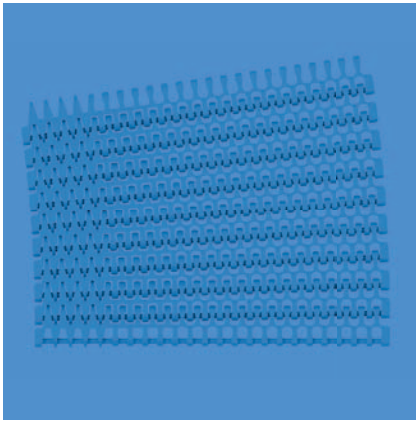

Belt dimensions

	p	d _{pin}	h _m	h _{pin}	h _s	W _{min}	W _{inc}	W _{tol}	Minimum flex radii ¹⁾				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C _c x W _B	r2	r3	r4	r5
mm	25.4	4.2	12.7	6.4	0.0	149.4	12.7	±0.2	1.7 x W _B	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.5	0.25	0.0	5.88	0.5	±0.2	1.7 x W _B	1.0	2.0	3.0	1.0

W_B = Belt width, further information regarding r1 see page III-20

Available standard materials⁴⁾

Belt		Pin		Nominal belt pull, straight		Nominal belt pull, curve		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[N]	[lb]	[kg/m ²]	[lb/ft ²]	[%]	[°C]	[°F]	FDA ²⁾	EU ³⁾
POM-CR	BL	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
POM-CR	WT	PLX	BL	30	2056	1600	360	8.4	1.72	-0.1	-45/90	-49/194	●	●
PP	BL	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	WT	PLX	BL	18	1233	1000	225	5.8	1.19	0.5	5/100	41/212	●	●
PP	BL	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●
PP	WT	PP	WT	16	1096	600	135	5.5	1.13	0.5	5/100	41/212	●	●

■ BL (Blue), □ WT (White)

All measurements and tolerances apply at 21 °C; for temperature deviations please see ProLink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

¹⁾ Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

²⁾ Complies with FDA 21 CFR

³⁾ Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

⁴⁾ More materials and colors on request





MOVEMENT SYSTEMS

SERIES 18 | SPROCKETS

siegling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in)

S18 SPR | Sprockets

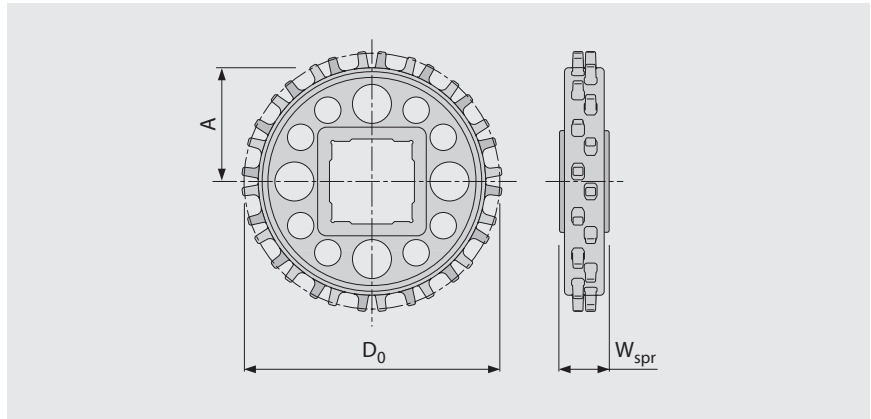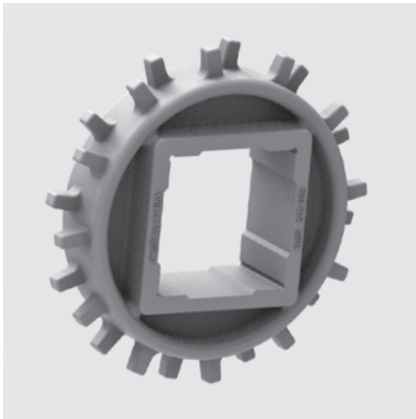

Main dimensions

Sprocket size (Number of teeth)		Z6	Z9	Z12	Z16	Z20
W _{spr}	mm	20.0	25.0	25.0	25.0	25.0
	inch	0.79	0.98	0.98	0.98	0.98
D ₀	mm	50.6	74.1	97.9	129.9	162.0
	inch	1.99	2.92	3.85	5.11	6.38
A _{max}	mm	19.2	30.9	42.8	58.8	75.0
	inch	0.76	1.22	1.69	2.31	2.95
A _{min}	mm	16.6	29.0	41.3	57.7	74.1
	inch	0.65	1.14	1.63	2.27	2.92

Shaft bores (● = Round, ■ = Square; ○/□ = not possible with G tab belts)

20	mm	○				
25	mm		●/■	●	●	●
30	mm			●	●	●
40	mm			●/■	●/■	●/■
0.75	inch	○				
1	inch		●/■	●	●	●
1.25	inch			●	●	●
1.5	inch			●/■	●/■	●/■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS

LEGEND

① Series	
S1 ... S18	



② Open area/Sprocket size	
Percentage open area	
Format: xx	
E.g. 20 = 20%	
For sprockets: number of teeth	
Format: "Z"xx	
E.g. Z12 = 12 teeth	

③ Surface pattern	
BSL	Base module for slider
CTP	Cone top
CUT	Curved top
FLT	Flat top (smooth)
FRT-OG	Friction top without High Grip insert
FRT(X)	Friction top (Design X)
GRT	Grid top
HDK	High Deck
LRB	Lateral rib
MOD	Modified module shape
NCL	No cling
NPY	Negative pyramid
NSK	Non skid
NSK2	Non skid, nonwoven variant
NTP	Nub top (round studs)
PRR	Pin Retained Rollers
RAT	Radius top
RRB	Raised rib
RSA	Reduced surface area
RTP	Roller top
SRS	Slip-resistant surface

④ Type	
BPU	Bucket profile
CAP	Pin lock & belt edge sealing
CCW	Counter clockwise
CLP	Clip
CM	Center module
CW	Clockwise
FPL	Finger plate
HDT	Hold Down Tab
IDL	Idler
PIN	Coupling rod
PMC	Profile module center
PMU	Profile module universal
PSP	ProSnap
RI	High Grip insert
RTR	Retaining ring
SG	Module with sideguard
SLI	Slider
SML	Side module, left
SMR	Side module, right
SMU	Side module, universal/both sides
SPR	Sprocket
TPL	Turning panel, left
TPR	Turning panel, right
UM	Universal module
WSC	Wheel Stopper Center
WSS	Wheel Stopper Side

⑥ Style	
1.7	1.7 collapse factor
2.2	2.2 collapse factor
2.2 G	2.2 collapse factor, guided
A90	Angle 90° to conveying direction
BT	Bearing tab
DR	Double row sprocket
F1, F2, F3 ...	Collapse factor modules
G	Guided
GT	Guiding tabs
HD	Hold Down
Ixx	xx = indent in mm
RG	Reversed guided
SG	Side guard
SP	Split sprocket
ST	Strong

⑥ Material	
PA	Polyamide
PA-HT	Polyamide high temperature
PBT	Polybutylenterephthalate
PE	Polyethylene
PE-MD	PE metal detectable
PLX	Wear & impact improved polymer
POM	Polyoxymethylene (Polyacetal)
POM-CR	POM cut resistant
POM-HC	POM highly conductive
POM-MD	POM metal detectable
POM-PE	POM side modules + PE center modules
POM-PP	POM side modules + PP center modules
PP	Polypropylene
PXX-HC	Self-extinguishing highly conductive material
R1	TPE 80 Shore A, PP
R2	EPDM 80 Shore A, vulcanized
R3	TPE 70 Shore A, POM
R4	TPE 86 Shore A, PP
R5	TPE 52 Shore A, PP
R6	TPE 63 Shore A, POM
R7	TPE 50 Shore A, PP
R8	TPE 55 Shore A, PE
SER	Self-extinguishing TPE
SS	Stainless steel
TPC1	Thermoplastic Copolyester
-HA	Supports the HACCP concept
-HW	High Wear resistant material

⑦ Color*		
AT	Anthracite	
BG	Beige	
BK	Black	
BL	Blue	
DB	Dark blue	
GN	Green	
LB	Light blue	
LG	Light gray	
OR	Orange	
RE	Red	
TQ	Turquoise	
UC	Uncolored	
WT	White	
YL	Yellow	

⑧ Height/Diameter/ Bore size and style	
Height in mm (in)	
Format: Hxxx	
Pin diameter in mm (in)	
Format: Dxxx	
Bore size: SQ (= square) or RD (= round)	
either in mm or inches	
Format: SQxxMM or RDxxIN	

⑨ Length/Width	
Pins Length in mm (in)	
Format: Lxxx	
Module width in mm (in)	
Format: Wxxx	

* For each series' standard colors please refer to the table of materials for each belt (chapter 1.2). A number of other colors are available on request. Colors can vary from the original due to the print, production processes or material used.